



MARKER FOR GASLINE
CARTELLO SEGNALETORE DI LINEA

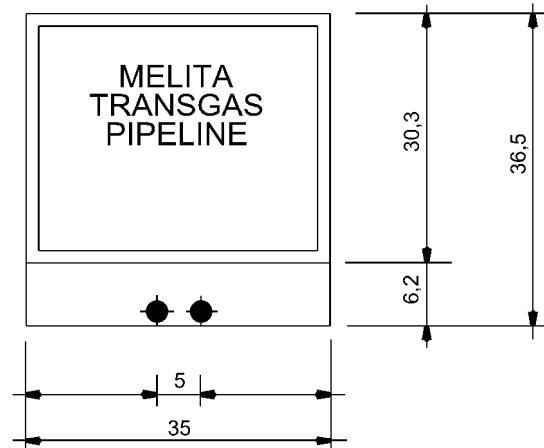

MARKER FOR GASLINE
CARTELLO SEGNALETORE
DI LINEA

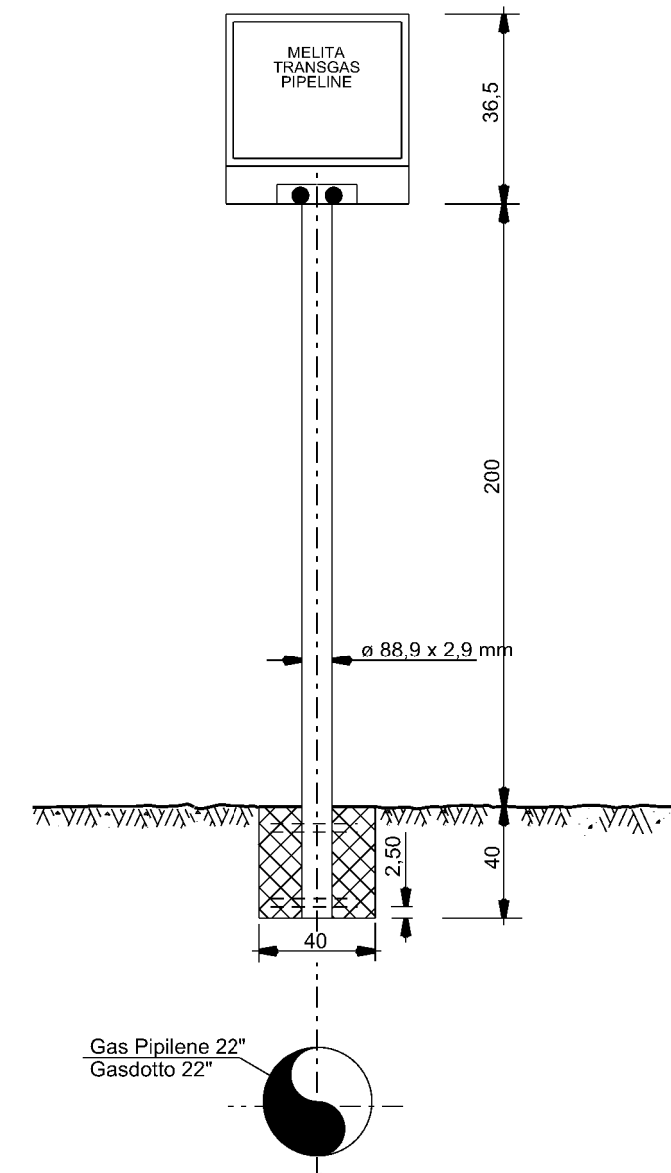

APPLICATION AND USES

ALONG THE LINE, MARKERS WILL BE INSTALLED TO SIGNAL PIPELINE PRESENCE AT:

- CROSSINGS;
- HORIZONTAL DEVIATIONS;
- ON PIPE AXIS EVERY 1 KM AS MINIMUM

MATERIALS:

REINFORCED CONCRETE WITH MINIMUM CLASS RESISTENCE C 20.
IN CHEMICAL AGGRESSIVE ENVIRONMENT SHALL BE USED RESISTANT CONCRETE IN COMPLIANCE TO CURRENT REGULATIONS.
ASTM API 105 VERNISHED METAL MATERIAL.

CAMPO DI APPLICABILITA' E CRITERI DI POSA

LO STANDARD E' APPLICABILE PER LA SEGNALAZIONE DELL'ASSE DELLA CONDOTTA LUNGO LA LINEA. I CARTELLI SEGNALATORI SONO UTILIZZATI LUNGO LA LINEA CON LO SCOPO DI SEGNALARE LA PRESENZA DELLA CONDOTTA INTERRATA. IL CRITERIO DI INSTALLAZIONE E' QUELLO CHE OGNI CARTELLO SEGNALATORE DEVE ESSERE VISIBILE SIA DA QUELLO PRECEDENTE E CHE DA QUELLO SUCCESSIVO.

CARATTERISTICHE DEI MATERIALI

CALCESTRUZZO PER CEMENTO ARMATO CON CLASSE DI RESISTENZA MINIMA C 20.
IN AMBIENTI CHIMICAMENTE AGGRESSIVI SI DOVRANNO UTILIZZARE CEMENTI RESISTENTI IN ACCORDO ALLA NORME VIGENTI SUI CALCESTRUZZI ARMATI.
MATERIALE METALLICO ASTM API 105 VERNICIATO.

NOTE
DRAWING NOT TO SCALE, ALL DIMENSION ARE IN CENTIMETERS (cm)
NOTA
DISEGNO FUORISCALE E MISURE ESPRESSE IN CENTIMETRI.

4	28/08/2019	AFD-APPROVED FOR DESIGN	D BARUCCA	G AIUDI	A PATERNIANI
3	22/08/2019	UPDATED ACCORDING TO THE RECEIVED COMMENTS IFA-ISSUE FOR APPROVAL	D BARUCCA	G AIUDI	A PATERNIANI
2	19/07/2019	REVISED ACCORDING TO THE RECEIVED COMMENTS IFC-ISSUE FOR COMMENTS	D BARUCCA	G AIUDI	A PATERNIANI
1	06/05/2019	ISSUE FOR COMMENTS	D BARUCCA	G AIUDI	A PATERNIANI
0	02/05/2019	ISSUE FOR INTERNAL CHECK	D BARUCCA	G AIUDI	A PATERNIANI
Rev	Date	Description	Prepared	Checked	Approved
Rev	Data	Descrizione	Preparato	Verificato	Approvato
			CONTRACT N. CT 3108/2018		JOB Commissa 171001
			LOCATION/LOCALITA' MALTA & ITALY		
			Document No / N Documento 10-DT-D-5514		
PROJECT PROGETTO			REVISION REVISIONE		
DOCUMENT TITLE TITOLO DEL DOCUMENTO			SHEET/FG		
			SCALE/SCALA		

The sole responsibility of this publication lies with the author. The European Union is not responsible for any use that may be made of the information contained therein.