LIVELLETTE																
	L=77.92m i=-0.85% Δh=-0.67m	L=56.70m	L=112.64m i=9.70% Δh=10.92m	L=9.15m	L=133.22m i=11.67% Δh=15.55m	L=29.47m	L=108.38m i=5.01% Δh=5.43m	L=8.82m	L=178.48m i=3.05% Δh=5.45m	L=8.81m	L=183.12m i=4.84% Δh=8.86m	L=18.65m	L=131.36m i=8.92% Δh=11.71m	L=38.34m	L=100.28m i=2.00% Δh=2.01m	

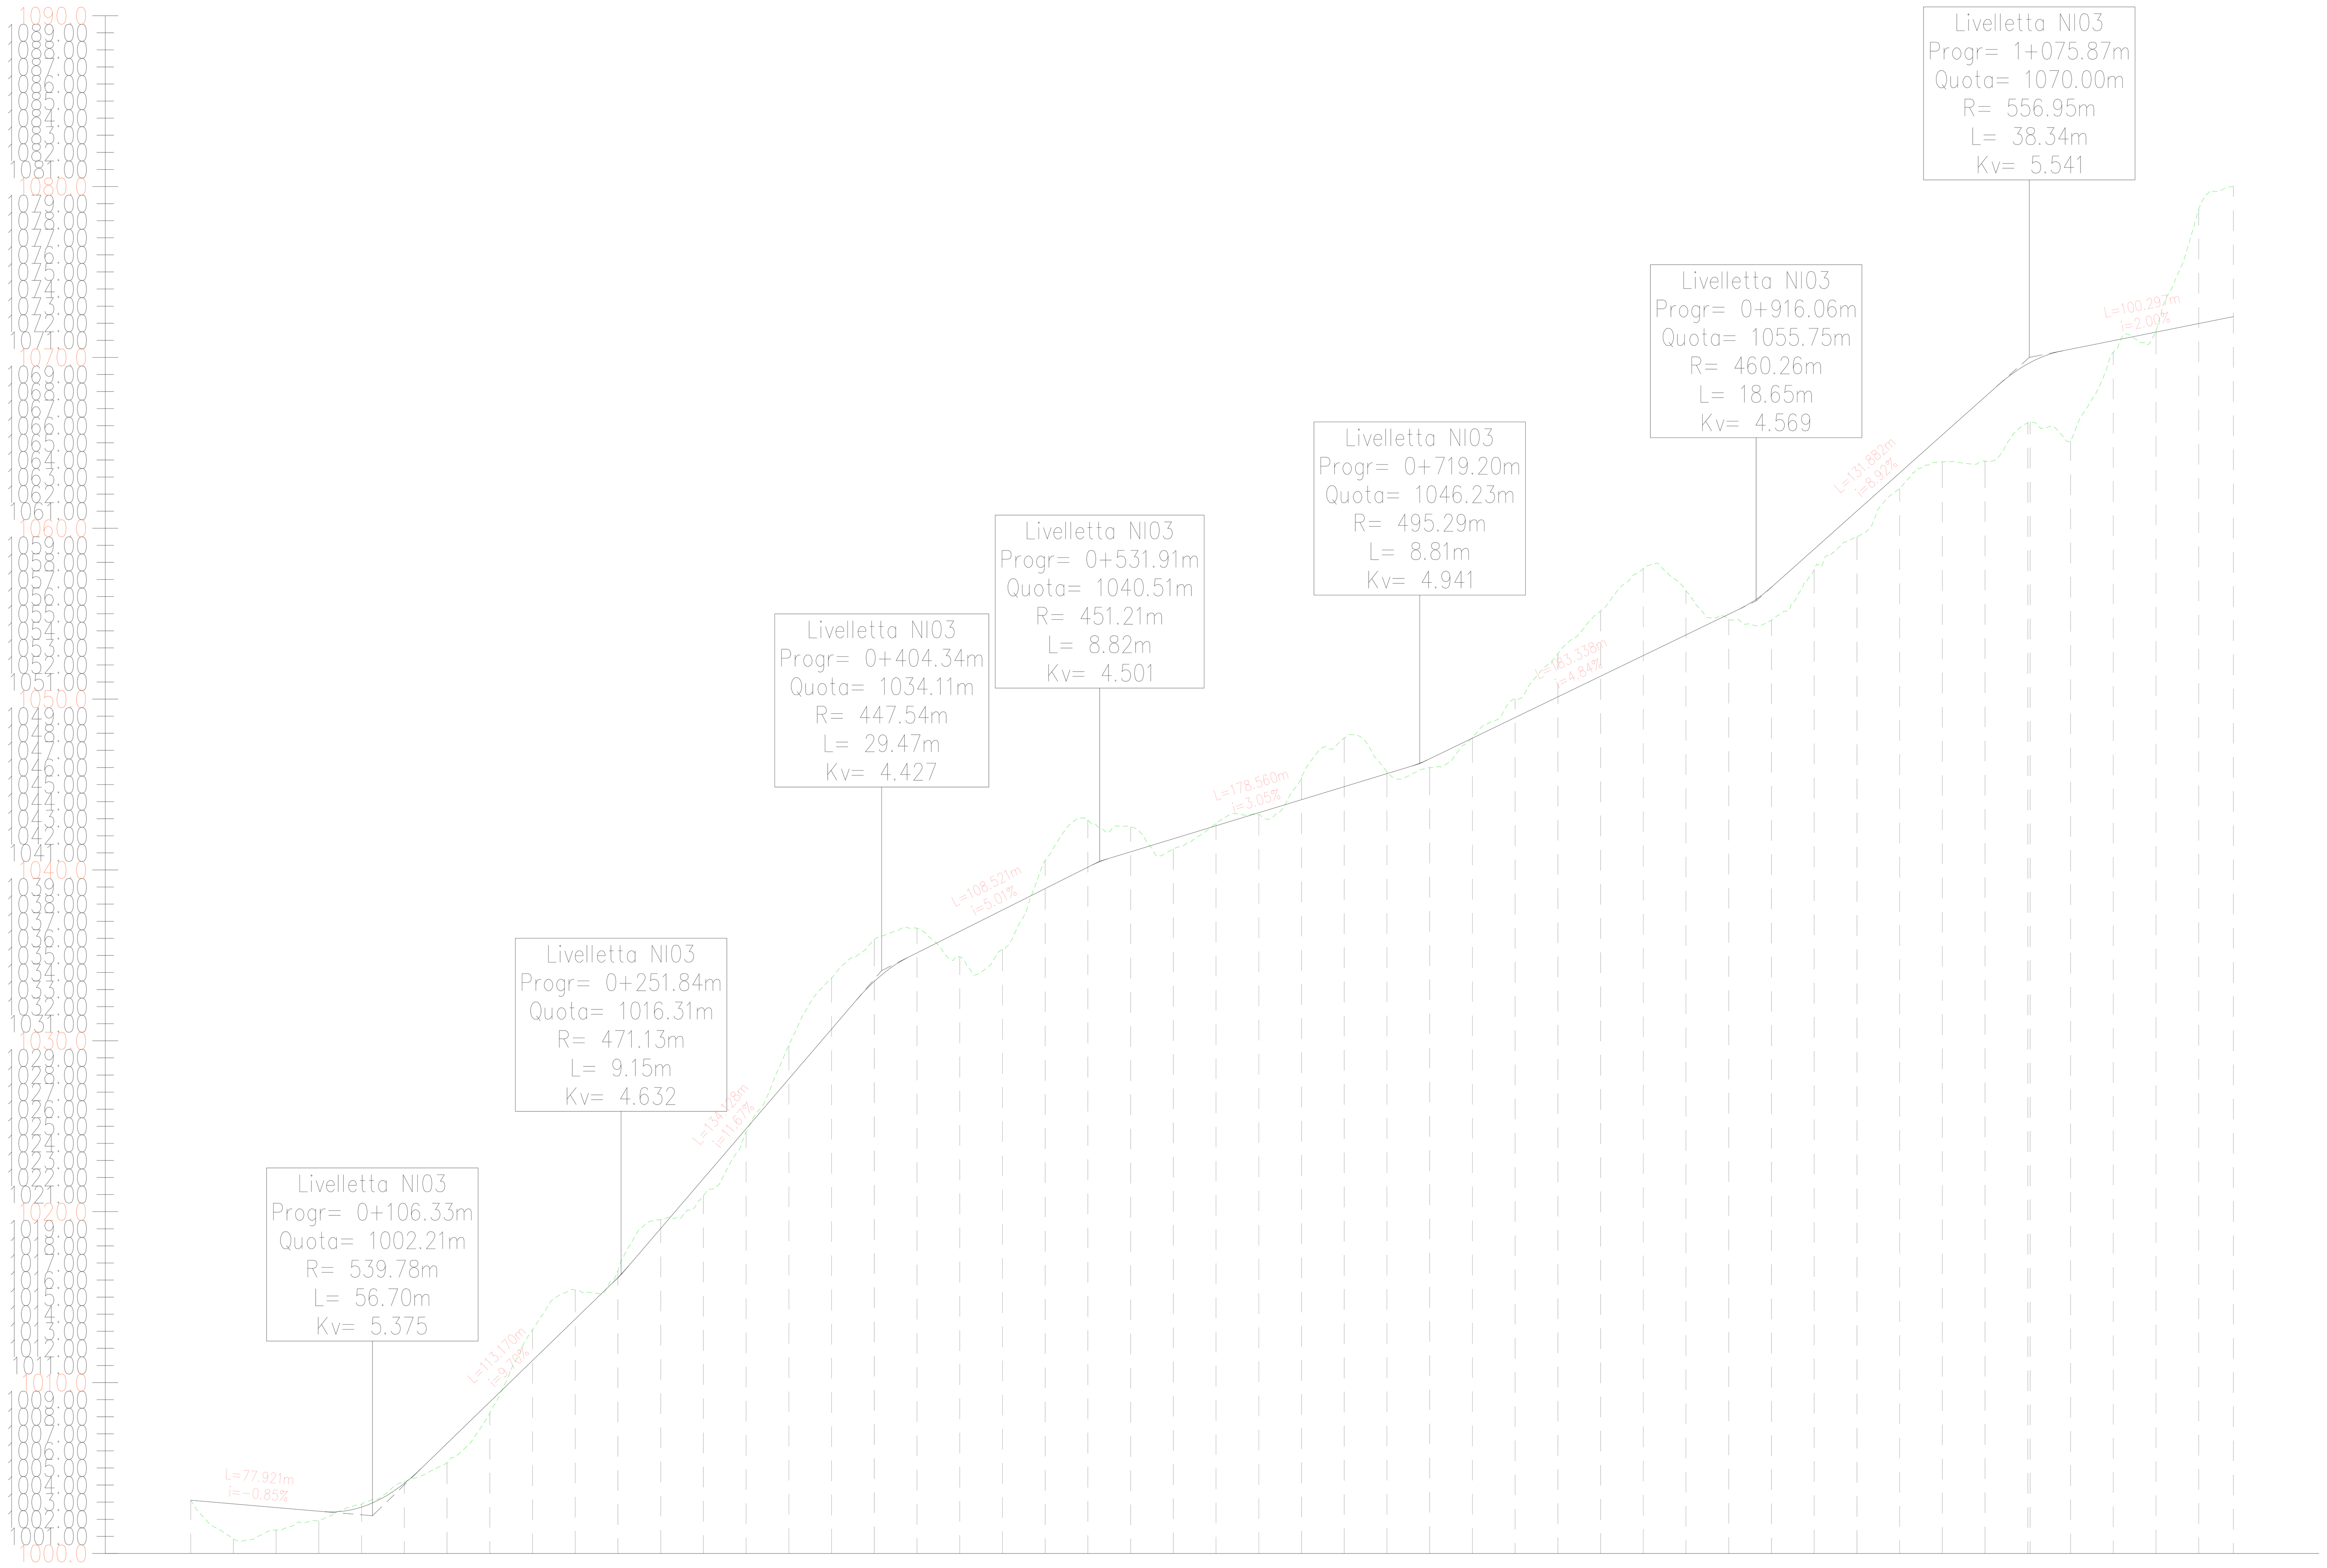

Profilo: Tracciato – NI03
Scala : 2000:200
Q.Rif. : 1000.00

NUMERO SEZIONE	DISTANZE PROGRESSIVE	DISTANZE PARZIALI	QUOTE PROGETTO	QUOTE TERRENO	DIFFERENZA QUOTE
1	0+000.00		1003.11	1003.11	0.00
2	0+025.00	25,00	1002.90	1000.84	2.06
3	0+050.00	25,00	1002.69	1001.37	1.32
4	0+075.00	25,00	1002.47	1001.92	0.56
5	0+100.00	25,00	1002.71	1002.90	-0.18
6	0+125.00	25,00	1004.10	1004.20	-0.10
7	0+150.00	25,00	1006.44	1005.31	1.13
8	0+175.00	25,00	1008.86	1008.22	0.64
9	0+200.00	25,00	1011.29	1013.09	-1.80
10	0+225.00	25,00	1013.71	1015.42	-1.71
11	0+250.00	25,00	1016.14	1016.55	-0.41
12	0+275.00	25,00	1019.02	1019.54	-0.53
13	0+300.00	25,00	1021.93	1020.94	1.00
14	0+325.00	25,00	1024.85	1024.65	0.20
15	0+350.00	25,00	1027.77	1029.75	-1.98
16	0+375.00	25,00	1030.69	1033.67	-2.98
17	0+400.00	25,00	1033.48	1035.93	-2.45
18	0+425.00	25,00	1035.15	1036.59	-1.44
19	0+450.00	25,00	1036.40	1034.92	1.48
20	0+475.00	25,00	1037.65	1035.36	2.29
21	0+500.00	25,00	1038.91	1040.56	-1.65
22	0+525.00	25,00	1040.16	1042.92	-2.76
23	0+550.00	25,00	1041.06	1042.52	-1.46
24	0+575.00	25,00	1041.82	1041.23	0.60
25	0+600.00	25,00	1042.59	1042.74	-0.15
26	0+625.00	25,00	1043.35	1043.25	0.10
27	0+650.00	25,00	1044.11	1045.43	-1.31
28	0+675.00	25,00	1044.88	1047.73	-2.85
29	0+700.00	25,00	1045.64	1045.74	-0.10
30	0+725.00	25,00	1046.51	1045.98	0.52
31	0+750.00	25,00	1047.72	1047.76	-0.04
32	0+775.00	25,00	1048.93	1050.01	-1.09
33	0+800.00	25,00	1050.14	1052.65	-2.52
34	0+825.00	25,00	1051.34	1055.15	-3.80
35	0+850.00	25,00	1052.55	1057.64	-5.09
36	0+875.00	25,00	1053.76	1056.34	-2.58
37	0+900.00	25,00	1054.97	1054.69	0.28
38	0+925.00	25,00	1056.55	1054.62	1.92
39	0+950.00	25,00	1058.78	1057.58	1.19
40	0+975.00	25,00	1061.00	1059.50	1.51
41	1+000.00	25,00	1063.23	1062.33	0.90
42	1+025.00	25,00	1065.46	1063.89	1.58
43	1+050.00	25,00	1067.69	1063.93	3.76
44	1+075.00	25,00	1069.6[illegible]	1066.[illegible]	3.43
45	1+076.35	1,35	1069.6[illegible]	1066.[illegible]	3.47
46	1+100.00	23,65	1070.48	1065.10	5.38
47	1+125.00	25,00	1070.98	1070.30	0.68
48	1+150.00	25,00	1071.48	1071.57	-0.09
49	1+175.00	25,00	1071.98	1078.66	-6.68
50	1+195.35	20,35	1072.39	1080.01	-7.62

ETTOMETRICHE: 00, 01, 02, 03, 04, 05, 06, 07, 08, 09, 10, 11, 11

ANDAMENTO PLANIMETRICO: Lrett=163.86m; L=30.24m R=80.00m; Lrett=716.32m; L=42.51m R=90.00m; Lrett=242.41m

KEY MAP

REV.	DATE	DESCRIPTION	PREPARED	CHECKED	APPROVED
01	2020.09.04	Integrati commenti	M.Terzi	N.Novati	L.Lavazza
00	2020.07.03	Prima Emissione	M.Terzi	N.Novati	L.Lavazza

LAVAZZA LUCA ORDINE DEGLI INGEGNERI DELLA PROVINCIA DI VARESE Ingegnere 05.03.2021 09:22:09 UTC

CONTRACTOR'S LOGO: Stantec

enel Green Power — Engineering & Construction

EGP VALIDATION

VALIDATED BY	Iaciofano
VERIFIED BY	Sabatino
COLLABORATORS	-

PROJECT: **INTEGRALE RICOSTRUZIONE DELL'IMPIANTO EOLICO DI NICOSIA**

FILE NAME: GRE.EEC.D.73.IT.W.12420.15.001.01 - Layout Strade

CLASSIFICATION:	FORMAT:	SCALE:	PLOT SCALE:	SHEET:
PUBLIC	A0	1:2000	1:1	10 di / of 38

UTILIZATION SCOPE: **BASIC DESIGN**

TITLE: **LAYOUT STRADE**
NI03 - PISTA DI ACCESSO E PIAZZOLA
Profilo

EGP CODE

GROUP	FUNCTION	TYPE	ISSUER	COUNTRY	TEC.	PLANT	SYSTEM	PROGRESSIVE	REVISION
GRE	EEC	D	7 3	I T	W	1 2 4 2 0	1 5	0 0 1	0 1

This document is property of Enel Green Power SpA. It is strictly forbidden to reproduce this document, in whole or in part, and to provide to others any related information without the previous written consent by Enel Green Power SpA.