



REGIONE MOLISE
 COMUNE DI TERMOLI
 (PROVINCIA DI CAMPOBASSO)



STEFANA SOLARE S.R.L.

SOCIETA' PROPONENTE:

Via Giuseppe barbato n° 20, cap. 86100 Campobasso (CB)
 P.IVA 01846370706 – PEC: stefana.solare@legalmail.it

NOME IMPIANTO: **"STEFANA SOLARE"**

PROGETTO: PROGETTO DEFINITIVO PER LA REALIZZAZIONE DI UN IMPIANTO
 SOLARE FOTOVOLTAICO CONNESSO ALLA RETE ELETTRICA NAZIONALE
 DELLA POTENZA MASSIMA DI IMMISSIONE DI 24 MWE CON IMPIANTI
 ED OPERE DI CONNESSIONE SITE IN ZONA INDUSTRIALE DEL
 COMUNE DI TERMOLI (CB)

ALLEGATO	TAVOLA B7	FOGLIO	MAPPALE	SCALA
----------	--------------	--------	---------	-------

OGGETTO
SPECIFICHE TECNICHE TIPO INVERTER-ACCUMULI

REDAZIONE PROGETTO:
 ING. CONTE ANGELO
 DOTT. ALFONSO IANIRO

TIMBRI E VISTI D'APPROVAZIONE

Cervaro lì 20-07-2022

IL PROGETTISTA E DIRETTORE DEI LAVORI
 ING. CONTE ANGELO




Studio Tecnico Ing. Angelo Conte
 Via Campolungo n° 8, cap. 03044 Cervaro (FR)
 tel./fax. 0776344451 cell. 3494709135 P.IVA: 02422120606
 e-mail: conte.angelo@libero.it pec: angelo.conte@ingpec.eu

SUNNY CENTRAL

2200 / 2475 / 2500-EV / 2750-EV / 3000-EV



SC-2200-10 / SC-2475-10 / SC-2500-EV-10 / SC-2750-EV-10 / SC-3000-EV-10



Full power
up to 35 °C

Efficient

- Up to 4 inverters can be transported in one standard shipping container
- Overdimensioning up to 225% is possible
- Full power at ambient temperatures of up to 35 °C

Robust

- Intelligent air cooling system OptiCool for efficient cooling
- Suitable for outdoor use in all climatic ambient conditions worldwide

Flexible

- Conforms to all known grid requirements worldwide
- Q on demand
- Available as a single device or turnkey solution, including medium-voltage block

Easy to Use

- Improved DC connection area
- Connection area for customer equipment
- Integrated voltage support for internal and external loads

SUNNY CENTRAL 2200 / 2475 / 2500-EV / 2750-EV / 3000-EV

The new Sunny Central: more power per cubic meter

With an output of up to 3000 kVA and system voltages of 1100 V DC or 1500 V DC, the SMA central inverter allows for more efficient system design and a reduction in specific costs for PV power plants. A separate voltage supply and additional space are available for the installation of customer equipment. True 1500 V technology and the intelligent cooling system OptiCool ensure smooth operation even in extreme ambient temperature as well as a long service life of 25 years.

SUNNY CENTRAL 1000 V

Technical Data	Sunny Central 2200	Sunny Central 2475*
Input (DC)		
MPP voltage range V_{DC} (at 25 °C / at 35 °C / at 50 °C)	570 to 950 V / 800 V / 800 V	638 V to 950 V / 800 V / 800 V
Min. input voltage $V_{DC, min}$ / Start voltage $V_{DC, Start}$	545 V / 645 V	614 V / 714 V
Max. input voltage $V_{DC, max}$	1100 V	1100 V
Max. input current $I_{DC, max}$ (at 25 °C / at 50 °C)	3960 A / 3600 A	3960 A / 3600 A
Max. short-circuit current $I_{DC, sc}$	6400 A	6400 A
Number of DC inputs	24 double pole fused (32 single pole fused)	
Max. number of DC cables per DC input (for each polarity)	2 x 800 kcmil, 2 x 400 mm ²	
Integrated zone monitoring	○	
Available DC fuse sizes (per input)	200 A, 250 A, 315 A, 350 A, 400 A, 450 A, 500 A	
Output (AC)		
Nominal AC power at $\cos \phi = 1$ (at 35 °C / at 50 °C)	2200 kVA / 2000 kVA	2475 kVA / 2250 kVA
Nominal AC power at $\cos \phi = 0.8$ (at 35 °C / at 50 °C)	1760 kW / 1600 kW	1980 kW / 1800 kW
Nominal AC current $I_{AC, nom}$ = Max. output current $I_{AC, max}$	3300 A	3300 A
Max. total harmonic distortion	< 3% at nominal power	< 3% at nominal power
Nominal AC voltage / nominal AC voltage range ^{1) 8)}	385 V / 308 V to 462 V	434 V / 347 V bis 521 V
AC power frequency / range	50 Hz / 47 Hz to 53 Hz 60 Hz / 57 Hz to 63 Hz	
Min. short-circuit ratio at the AC terminals ⁹⁾	> 2	
Power factor at rated power / displacement power factor adjustable ^{9) 10)}	● 1 / 0.8 overexcited to 0.8 underexcited ○ 1 / 0.0 overexcited to 0.0 underexcited	
Efficiency		
Max. efficiency ²⁾ / European efficiency ²⁾ / CEC efficiency ³⁾	98.6% / 98.4% / 98.0%	98.6% / 98.4% / 98.0%
Protective Devices		
Input-side disconnection point	DC load break switch	
Output-side disconnection point	AC circuit breaker	
DC overvoltage protection	Surge arrester, type I	
AC overvoltage protection (optional)	Surge arrester, class I	
Lightning protection (according to IEC 62305-1)	Lightning Protection Level III	
Ground-fault monitoring / remote ground-fault monitoring	○ / ○	
Insulation monitoring	○	
Degree of protection: electronics / air duct / connection area (as per IEC 60529)	IP65 / IP34 / IP34	
General Data		
Dimensions (W / H / D)	2780 / 2318 / 1588 mm (109.4 / 91.3 / 62.5 inch)	
Weight	< 3400 kg / < 7496 lb	
Self-consumption (max. ⁴⁾ / partial load ⁵⁾ / average ⁶⁾	< 8100 W / < 1800 W / < 2000 W	
Self-consumption (standby)	< 300 W	
Internal auxiliary power supply	Integrated 8.4 kVA transformer	
Operating temperature range ⁸⁾	-25 °C to 60 °C / -13 °F to 140 °F	
Noise emission ⁷⁾	67.0 dB(A)	
Temperature range (standby)	-40 °C to 60 °C / -40 °F to 140 °F	
Temperature range (storage)	-40 °C to 70 °C / -40 °F to 158 °F	
Max. permissible value for relative humidity (condensing / non-condensing)	95% to 100% (2 month/year) / 0% to 95%	
Maximum operating altitude above MSL ⁹⁾ 1000 m / 2000 m / 3000 m / 4000 m	● / ○ / ○ / ○ (earlier temperature-dependent derating)	
Fresh air consumption	6500 m ³ /h	
Features		
DC connection	Terminal lug on each input (without fuse)	
AC connection	With busbar system (three busbars, one per line conductor)	
Communication	Ethernet, Modbus Master, Modbus Slave	
Communication with SMA string monitor (transmission medium)	Modbus TCP / Ethernet (FO MM, Cat-5)	
Enclosure / roof color	RAL 9016 / RAL 7004	
Supply transformer for external loads	○ (2.5 kVA)	
Standards and directives complied with	CE, IEC / EN 62109-1, IEC / EN 62109-2, BDEW-MSRL, IEEE1547, UL 840 Cat. IV, Arrêté du 23/04/08	
EMC standards	IEC / EN 61000-6-4, IEC / EN 61000-6-2, EN 55022, IEC 62920, FCC Part 15 Class A, Cisp 11, DIN EN55011:2017	
Quality standards and directives complied with	VDI/VDE 2862 page 2, DIN EN ISO 9001	
● Standard features ○ Optional * preliminary		
Type designation	SC-2200-10	SC-2475-10

1) At nominal AC voltage, nominal AC power decreases in the same proportion

2) Efficiency measured without internal power supply

3) Efficiency measured with internal power supply

4) Self-consumption at rated operation

5) Self-consumption at < 75% Pn at 25 °C

6) Self-consumption averaged out from 5% to 100% Pn at 25 °C

7) Sound pressure level at a distance of 10 m

8) Values apply only to inverters. Permissible values for SMA MV solutions from SMA can be found in the corresponding data sheets.

9) A short-circuit ratio of < 2 requires a special approval from SMA

10) Depending on the DC voltage


SUNNY CENTRAL 1500 V

Technical Data	Sunny Central 2500-EV	Sunny Central 2750-EV	Sunny Central 3000-EV*
Input (DC)			
MPP voltage range V_{DC} (at 25 °C / at 35 °C / at 50 °C)	850 V to 1425 V / 1200 V / 1200 V	875 V to 1425 V / 1200 V / 1200 V	956 V to 1425 V / 1200 V / 1200 V
Min. input voltage $V_{DC, min}$ / Start voltage $V_{DC, Start}$	778 V / 928 V	849 V / 999 V	927 V / 1077 V
Max. input voltage $V_{DC, max}$	1500 V	1500 V	1500 V
Max. input current $I_{DC, max}$ (at 25 °C / at 50 °C)	3200 A / 2956 A	3200 A / 2956 A	3200 A / 2970 A
Max. short-circuit current rating	6400 A	6400 A	6400 A
Number of DC inputs	32	32	32
Max. number of DC cables per DC input (for each polarity)	2 x 800 kcmil, 2 x 400 mm ²	2 x 800 kcmil, 2 x 400 mm ²	2 x 800 kcmil, 2 x 400 mm ²
Integrated zone monitoring	○	○	○
Available DC fuse sizes (per input)	200 A, 250 A, 315 A, 350 A, 400 A, 450 A, 500 A		
Output (AC)			
Nominal AC power at $\cos \phi = 1$ (at 35 °C / at 50 °C)	2500 kVA / 2250 kVA	2750 kVA / 2500 kVA	3000 kVA / 2700 kVA
Nominal AC power at $\cos \phi = 0.8$ (at 35 °C / at 50 °C)	2000 kW / 1800 kW	2200 kW / 2000 kW	2400 kW / 2160 kW
Nominal AC current $I_{AC, nom} = \text{Max. output current } I_{AC, max}$	2624 A	2646 A	2624 A
Max. total harmonic distortion	< 3% at nominal power	< 3% at nominal power	< 3% at nominal power
Nominal AC voltage / nominal AC voltage range ^{1) 8)}	550 V / 440 V to 660 V	600 V / 480 V to 690 V	655 V / 524 V to 721 V ⁹⁾
AC power frequency		50 Hz / 47 Hz to 53 Hz 60 Hz / 57 Hz to 63 Hz	
Min. short-circuit ratio at the AC terminals ¹⁰⁾		> 2	
Power factor at rated power / displacement power factor adjustable ^{8) 11)}		● 1 / 0.8 overexcited to 0.8 underexcited ○ 1 / 0.0 overexcited to 0.0 underexcited	
Efficiency			
Max. efficiency ²⁾ / European efficiency ²⁾ / CEC efficiency ³⁾	98.6% / 98.3% / 98.0%	98.7% / 98.5% / 98.5%	98.7% / 98.6% / 98.5%
Protective Devices			
Input-side disconnection point		DC load-break switch	
Output-side disconnection point		AC circuit breaker	
DC overvoltage protection		Surge arrester, type I	
AC overvoltage protection (optional)		Surge arrester, class I	
Lightning protection (according to IEC 62305-1)		Lightning Protection Level III	
Ground-fault monitoring / remote ground-fault monitoring		○ / ○	
Insulation monitoring		○	
Degree of protection: electronics / air duct / connection area (as per IEC 60529)		IP65 / IP34 / IP34	
General Data			
Dimensions (W / H / D)	2780 / 2318 / 1588 mm (109.4 / 91.3 / 62.5 inch)		
Weight	< 3400 kg / < 7496 lb		
Self-consumption (max. ⁴⁾ / partial load ⁵⁾ / average ⁶⁾	< 8100 W / < 1800 W / < 2000 W		
Self-consumption (standby)	< 370 W		
Internal auxiliary power supply	Integrated 8.4 kVA transformer		
Operating temperature range ⁸⁾	-25 to 60 °C / -13 to 140 °F		
Noise emission ⁷⁾	67.8 dB(A)		
Temperature range (standby)	-40 to 60 °C / -40 to 140 °F		
Temperature range (storage)	-40 to 70 °C / -40 to 158 °F		
Max. permissible value for relative humidity (condensing / non-condensing)	95% to 100% (2 month / year) / 0% to 95%		
Maximum operating altitude above MSL ⁸⁾ 1000 m / 2000 m / 3000 m	● / ○ / ○ (earlier temperature-dependent derating)		
Fresh air consumption	6500 m ³ /h		
Features			
DC connection	Terminal lug on each input (without fuse)		
AC connection	With busbar system (three busbars, one per line conductor)		
Communication	Ethernet, Modbus Master, Modbus Slave		
Communication with SMA string monitor (transmission medium)	Modbus TCP / Ethernet (FO MM, Cat-5)		
Enclosure / roof color	RAL 9016 / RAL 7004		
Supply transformer for external loads	○ (2.5 kVA)		
Standards and directives complied with	CE, IEC / EN 62109-1, IEC / EN 62109-2, BDEW-MSRL, IEEE1547, Arrêté du 23/04/08		
EMC standards	CISPR 11, CISPR 22, EN55011:2017, EN 55022, IEC/EN 61000-6-4, IEC/EN 61000-6-2, IEC 62920, FCC Part 15 Class A	CISPR 11, CISPR 22, EN55011:2017, EN 55022, IEC 62920, FCC Part 15 Class A	
Quality standards and directives complied with	VDI/VDE 2862 page 2, DIN EN ISO 9001		
● Standard features ○ Optional * preliminary			
Type designation	SC-2500-EV-10	SC-2750-EV-10	SC-3000-EV-10


- 1) At nominal AC voltage, nominal AC power decreases in the same proportion
- 2) Efficiency measured without internal power supply
- 3) Efficiency measured with internal power supply
- 4) Self-consumption at rated operation
- 5) Self-consumption at < 75% Pn at 25 °C
- 6) Self-consumption averaged out from 5% to 100% Pn at 35 °C

- 7) Sound pressure level at a distance of 10 m
- 8) Values apply only to inverters. Permissible values for SMA MV solutions from SMA can be found in the corresponding data sheets.
- 9) AC voltage range can be extended to 753V for 50Hz grids only (option „Aux power supply: external“ must be selected, option “housekeeping” not combinable).
- 10) A short-circuit ratio of < 2 requires a special approval from SMA
- 11) Depending on the DC voltage

SYSTEM DIAGRAM

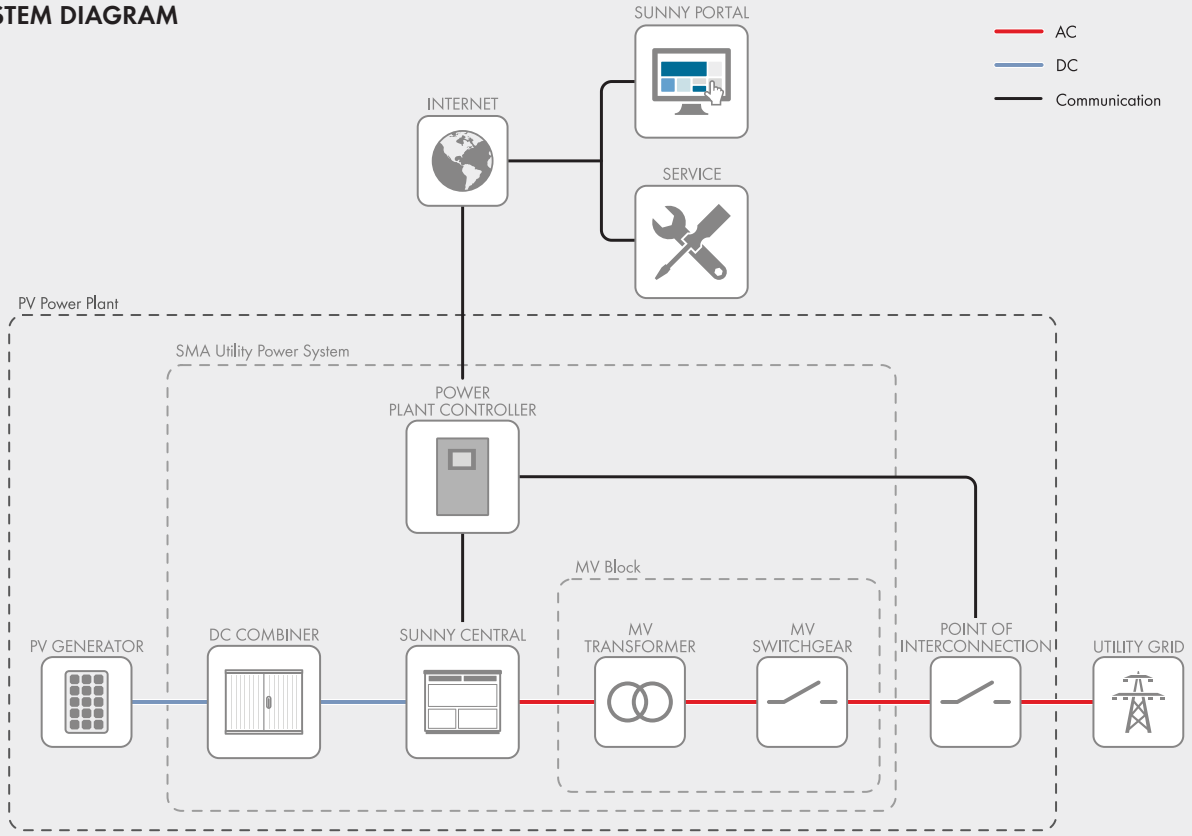

TEMPERATURE BEHAVIOR (at 1000 m)

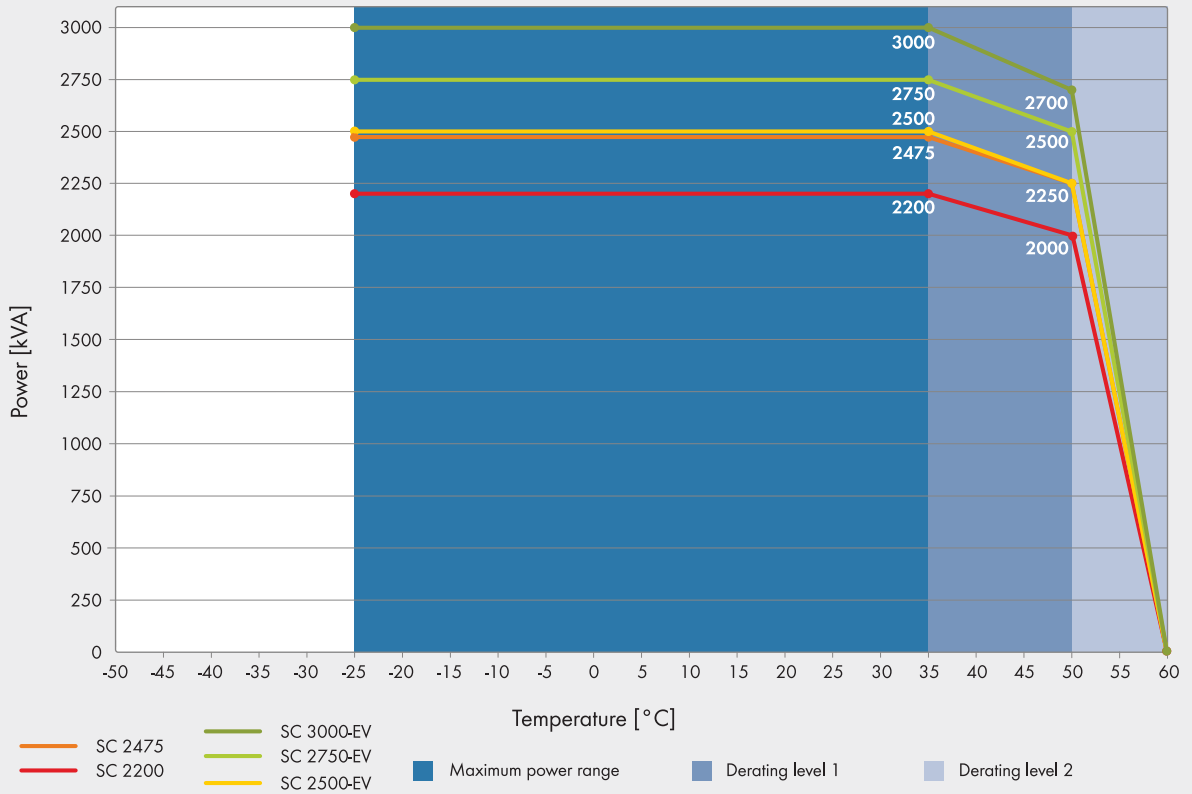

MV POWER STATION

2200 / 2475 / 2500 / 2750 / 3000



MVPS 2200-20 / MVPS 2475-20 / MVPS 2500-20 / MVPS 2750-20 / MVPS 3000-20



Robust

- Station and all individual components type-tested
- Optimally suited to extreme ambient conditions

Easy to Use

- Plug and play concept
- Walk-in control rooms
- Completely pre-assembled for easy set-up and commissioning

Cost-Effective

- Easy planning and installation
- Low transport costs due to 20-foot container

Flexible

- Global solution for international markets
- Numerous options
- Compatible with MVPS 4400 – MVPS 6000

MV POWER STATION 2200 / 2475 / 2500 / 2750 / 3000

Turnkey Solution for PV Power Plants

With the power of the new robust central inverters, the Sunny Central or Sunny Central Storage, and with perfectly adapted medium-voltage components, the new MV Power Station offers even more power density and is a turnkey solution available worldwide. The solution is the ideal choice for new generation PV power plants operating at 1500 V_{DC}. Delivered pre-configured in a 20-foot container, the solution is easy to transport and quick to assemble and commission. The MVPS and all components are type-tested. The MV Power Station combines rigorous plant safety with maximum energy yield and minimized deployment and operating risk.

MV POWER STATION


2200 / 2475 / 2500 / 2750 / 3000

Technical Data	MV Power Station 2200
Input (DC)	
Available inverters	1 x SC 2200 or 1 x SCS 2200
Max. input voltage	1100 V
Max. input current	3960 A
Number of DC inputs	24 double pole fused (32 single pole fused)
Integrated zone monitoring	○
Available DC fuse sizes (per input)	200 A, 250 A, 315 A, 350 A, 400 A, 450 A, 500 A
Output (AC) on the medium-voltage side	
Standard power at 1000 m and $\cos \varphi = 1$ (at 35°C / at 40°C / at 45°C) ¹⁾	2200 kVA / 2000 kVA / 0 kVA
Optionale power at 1000 m and $\cos \varphi = 1$ (at 35°C / at 50°C / at 55°C) ¹⁾	2200 kVA / 2000 kVA / 0 kVA
Typical nominal AC voltages	6.6 kV to 35 kV
AC power frequency	50 Hz / 60 Hz
Transformer vector group Dy11 / YNd11	● / ○
Transformer cooling methods ONAN ²⁾ / KNAN ²⁾	● / ○
Max. output current at 33 kV	39 A
Transformer no-load losses Standard / Ecodesign ³⁾	● / ○
Transformer short-circuit losses Standard / Ecodesign ³⁾	● / ○
Max. total harmonic distortion	< 3%
Reactive power feed-in	○ up to 60% of AC power
Power factor at rated power / displacement power factor adjustable	1 / 0.8 overexcited to 0.8 underexcited
Inverter efficiency	
Max. efficiency	98.6%
European efficiency	98.4%
CEC weighted efficiency ⁴⁾	98.0%
Protective devices	
Input-side disconnection point	DC load-break switch
Output-side disconnection point	Medium-voltage vacuum circuit breaker
DC overvoltage protection	Surge arrester type I
Galvanic isolation	●
Internal arc classification medium-voltage control room (according to IEC 62271-202)	IAC A 20 kA 1 s
General Data	
Dimensions of the 20-foot ISO container (W / H / D) ⁵⁾	6.058 m / 2.591 m / 2.438 m
Weight	< 16 t
Self-consumption (max. / partial load / average) ¹⁾	< 8.1 kW / < 1.8 kW / < 2.0 kW
Self-consumption (stand-by) ¹⁾	< 300 W
Degree of protection according to IEC 60529	Control rooms IP23D, inverter electronics IP65
Environment: standard / chemically active / dusty	● / ○ / ○
Degree of protection according to IEC 60721-3-4 (4C1, 4S2 / 4C2, 4S2 / 4C2, 4S4)	● / ○ / ○
Maximum permissible value for relative humidity	15% to 95%
Max. operating altitude above mean sea level 1000 m / 2000 m / 3000 m / 4000	● / ○ / ○ / ○ (earlier temperature-dependent de-rating)
Fresh air consumption of inverter and transformer	6500 m ³ /h
Features	
DC terminal	Terminal lug
AC connection	Outer-cone angle plug
Tap changer for MV-transformer: without / with	● / ○
Shield winding for MV-Transformer: without / with	● / ○
Communication package	○
Station enclosure color	RAL 7004
Transformer for external loads: without / 20 kVA / 30 kVA	● / ○ / ○
Medium-voltage switchgear: without / 2 feeders / 3 feeders	● / ○ / ○
1 or 2 cable feeders with load-break switch, 1 transformer feeder with circuit breaker, internal arc classification IAC A FL 20 kA 1 s according to IEC 62271-200	
Accessories for medium-voltage switchgear: without / auxiliary contacts / motor for transformer feeder / cascade control / monitoring	● / ○ / ○ / ○ / ○
Oil containment	○
Industry standards (for other standards see the inverter datasheet)	IEC 62271-202, IEC 62271-200, IEC 60076 , CSC certificate, EN 50588-1
● Standard features ○ Optional features – Not available	
Type designation	MVPS-2200-20


- 1) Data based on inverter
- 2) ONAN = Mineral oil with natural air cooling; KNAN = Organic oil with natural air cooling
- 3) Losses in accordance with the Ecodesign regulations, EN 50588-1
- 4) Efficiency measured at inverter with internal power supply
- 5) Transport dimensions

MV Power Station 2475	MV Power Station 2500	MV Power Station 2750	MV Power Station 3000
1 x SC 2475 or 1 x SCS 2475	1 x SC 2500-EV or 1 x SCS 2500-EV	1 x SC 2750-EV or 1 x SCS 2750-EV	1 x SC 3000-EV or 1 x SCS 3000-EV
1100 V	1500 V	1500 V	1500 V
3960 A	3200 A	3200 A	3200 A
24 double pole fused (32 single pole fused)			
○	○	○	○
200 A, 250 A, 315 A, 350 A, 400 A, 450 A, 500 A			
2475 kVA / 2250 kVA / 0 kVA	2500 kVA / 2250 kVA / 0 kVA	2750 kVA / 2500 kVA / 0 kVA	3000 kVA / 2700 kVA / 0 kVA
2475 kVA / 2250 kVA / 0 kVA	2500 kVA / 2250 kVA / 0 kVA	2750 kVA / 2500 kVA / 0 kVA	3000 kVA / 2700 kVA / 0 kVA
6.6 kV to 35 kV	6.6 kV to 35 kV	6.6 kV to 35 kV	6.6 kV to 35 kV
50 Hz / 60 Hz	50 Hz / 60 Hz	50 Hz / 60 Hz	50 Hz / 60 Hz
● / ○	● / ○	● / ○	● / ○
● / ○	● / ○	● / ○	● / ○
43 A	44 A	49 A	53 A
● / ○	● / ○	● / ○	● / ○
● / ○	● / ○	● / ○	● / ○
< 3%	< 3%	< 3%	< 3%
○ up to 60% of AC power	○ up to 60% of AC power	○ up to 60% of AC power	○ up to 60% of AC power
1 / 0.8 overexcited to 0.8 underexcited	1 / 0.8 overexcited to 0.8 underexcited	1 / 0.8 overexcited to 0.8 underexcited	1 / 0.8 overexcited to 0.8 underexcited
98.6%	98.6%	98.7%	98.7%
98.4%	98.3%	98.6%	98.6%
98.0%	98.0%	98.5%	98.5%
DC load-break switch	DC load-break switch	DC load-break switch	DC load-break switch
Medium-voltage vacuum circuit breaker	Medium-voltage vacuum circuit breaker	Medium-voltage vacuum circuit breaker	Medium-voltage vacuum circuit breaker
Surge arrester type I	Surge arrester type I	Surge arrester type I	Surge arrester type I
●	●	●	●
IAC A 20kA 1s	IAC A 20kA 1s	IAC A 20kA 1s	IAC A 20kA 1s
6.058 m / 2.591 m / 2.438 m	6.058 m / 2.591 m / 2.438 m	6.058 m / 2.591 m / 2.438 m	6.058 m / 2.591 m / 2.438 m
< 16 t	< 16 t	< 16 t	< 16 t
< 8.1 kW / < 1.8 kW / < 2.0 kW	< 8.1 kW / < 1.8 kW / < 2.0 kW	< 8.1 kW / < 1.8 kW / < 2.0 kW	< 8.1 kW / < 1.8 kW / < 2.0 kW
< 300 W	< 370 W	< 370 W	< 370 W
Control rooms IP23D, inverter electronics IP65			
● / ○ / ○	● / ○ / ○	● / ○ / ○	● / ○ / ○
● / ○ / ○	● / ○ / ○	● / ○ / ○	● / ○ / ○
15% to 95%	15% to 95%	15% to 95%	15% to 95%
● / ○ / ○ / ○ (earlier temperature-dependent de-rating)	● / ○ / ○ / - (earlier temperature-dependent de-rating)		
6500 m³/h	6500 m³/h	6500 m³/h	6500 m³/h
Terminal lug	Terminal lug	Terminal lug	Terminal lug
Outer-cone angle plug	Outer-cone angle plug	Outer-cone angle plug	Outer-cone angle plug
● / ○	● / ○	● / ○	● / ○
● / ○	● / ○	● / ○	● / ○
○	○	○	○
RAL 7004	RAL 7004	RAL 7004	RAL 7004
● / ○ / ○	● / ○ / ○	● / ○ / ○	● / ○ / ○
● / ○ / ○	● / ○ / ○	● / ○ / ○	● / ○ / ○
● / ○ / ○ / ○ / ○	● / ○ / ○ / ○ / ○	● / ○ / ○ / ○ / ○	● / ○ / ○ / ○ / ○
○	○	○	○
IEC 62271-202, IEC 62271-200, IEC 60076 , CSC certificate, EN 50588-1			
MVPS-2475-20	MVPS-2500-20	MVPS-2750-20	MVPS-3000-20

System diagram with Sunny Central

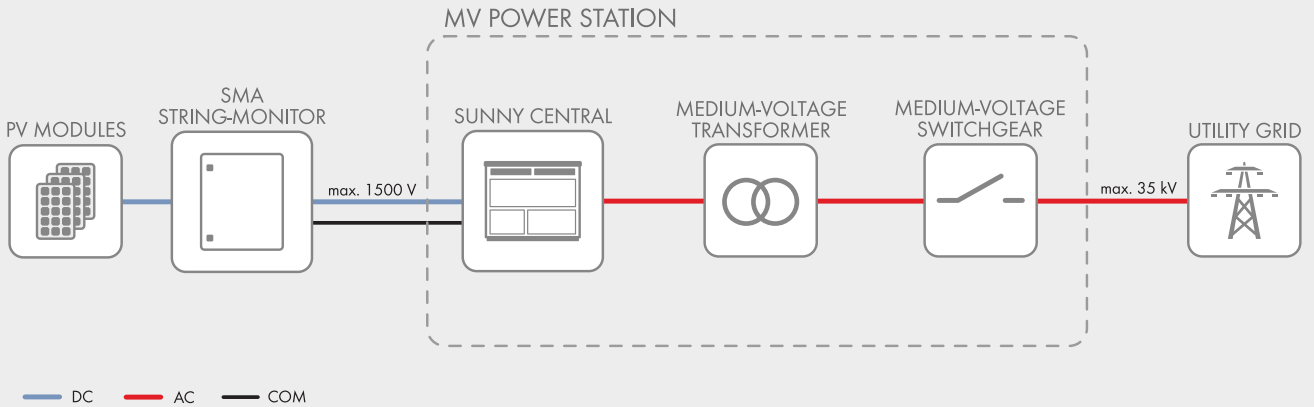

System diagram with Sunny Central Storage

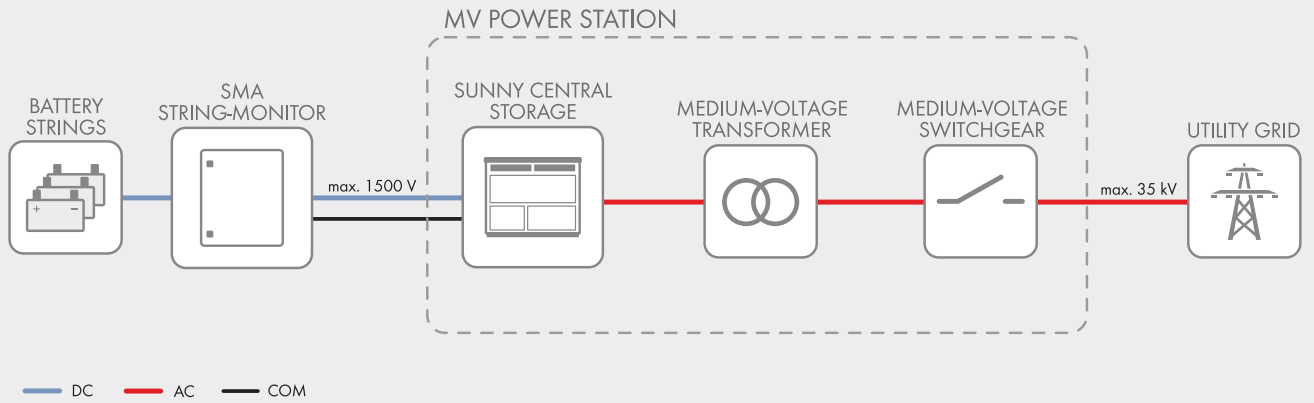



SMA Solar Technology AG · Sonnenallee 1 · 34266 Niestetal · GERMANY

SMA Solar Technology AG

Sonnenallee 1
34266 Niestetal
GERMANY
Tel.: +49 561 9522-0
Fax: +49 561 9522-100
E-Mail: info@SMA.de
Internet: www.SMA.de

To whom it may concern

Author Thomas Weiss
Phone +49 561 9522-4755
Fax +49 561 9522-100
E-Mail thomas.weiss@sma.de
Date 28.01.2019

**Medium Voltage Grid Connection in Italy
MVPS Compliance according to CEI 0-16**

Hereby we confirm that our Medium Voltage Power Station (MVPS) is compliant to the Italian Standard CEI 0-16. According paragraph 8.5.13 of this standard there is a limit on 20 kV grid connection for Medium Voltage Transformers (MVT), defined with a transformer power of 2000 kVA and a short circuit voltage Vcc of 6 %. Higher power classes are allowed in case of using higher short circuit impedances, to reduce the short circuit power according to paragraph 8.5.13. SMA will deliver the following transformers for 20 kV grid connection:

MVPS	DC Voltage	MVT power	AC Voltage	Vcc
2200	1000 V	2000 kVA	20 kV	> 6.00 %
2475	1000 V	2250 kVA	20 kV	> 6.75 %
2500	1500 V	2250 kVA	20 kV	> 6.75 %
2750	1500 V	2500 kVA	20 kV	> 7.50 %
3000	1500 V	2700 kVA	20 kV	> 8.10 %

There is also a limit for the maximum power of 6000 kVA that can be energized at the same time according to paragraph 8.5.14 of the standard CEI 0-16. In this case SMA Solar Technology AG can offer the option Cascade Control for a delayed switching of the MV transformers, to reduce the inrush current

Yours sincerely,

SMA Solar Technology AG

i.A.

i. A. Thomas Weiss

Technical Product Manager
Business Unit Utility

i. A. Bernhard Voll

Platform Product Manager
Business Unit Utility

TECHNICAL DATA SHEET

Medium Voltage Transformer 2250 kVA
for Medium Voltage Power Station 2500



TYPE	Medium-voltage transformer for inverter application	
DESIGN	Three-phase-oil-transformer hermetic sealed	
RATED POWER @ 50 °C	[kVA]	2250
RATED POWER @ 35 °C	[kVA]	2500
RATED CURRENT AT LOW-VOLTAGE LEVEL @ 50 °C (APPROX.)	[A]	2362
RATED VOLTAGE	[kV/kV]	20 / 0.550
FREQUENCY	[Hz]	50
VECTOR GROUP	Dy11	
NO-LOAD LOSSES (AT RATED VOLTAGE)	[kW]	1.76
SHORT-CIRCUIT LOSSES (@ TEMP. 75 °C, @ RATED POWER)	[kW]	22
IMPEDANCE VOLTAGE AT RATED CURRENT (@ TEMP. 75 °C, @ RATED POWER)	[%]	5 to 8.5
MAX. VOLTAGE FOR EQUIPMENT U_m	[kV]	24
TYPE OF COOLING	ONAN	
MAX. ALTITUDE ABOVE SEA LEVEL	[m]	4000
AMBIENT TEMPERATURES (MIN. / MAX.)	[°C]	-25 / 50
@ 1000 m	[°C]	50
@ 2000 m	[°C]	45
@ 3000 m	[°C]	40
@ 4000 m	[°C]	35
MAX. OVER TEMPERATURE (HOT SPOT / WINDING / OIL)	[°K]	80 / 65 / 50
SHORT-CIRCUIT DURATION	[s]	2
MANUFACTURERS REGULATION	IEC 60076	
INSULATION	Semi hybrid insulation	
INSULATION LEVEL	LI 125 AC 50 / LI - AC 10	
HIGH-VOLTAGE BUSHING	Outside conical socket-contact 630 A, type C, without plug	
LOW-VOLTAGE BUSHING	3.6 kV bushing for at least 3300 A	
MAX. DIMENSIONS (LxWxH)	[mm]	1606 x 2200 x 2250
TOTAL WEIGHT (APPROX.)	[kg]	7000
OIL WEIGHT (APPROX.)	[kg]	1500
OIL TYPE	Mineral oil	
COATING according to ISO 12944-5	C5M-H	
IP-CODE OF ASSEMBLED TRANSFORMER according to IEC 60529	IP54	
TRANSFORMER PROTECTION	<ul style="list-style-type: none"> - Resistance thermometer PT100 for analogue oil temperature measurement - Hermetic protection device for monitoring of oil pressure, gas and oil leakages - Overpressure valve 	
ACCESSORIES	<ul style="list-style-type: none"> - Oil filling pipe - Oil sampling valve - Lifting lugs - Earthing terminals - Nameplate 	

Values subject to tolerances according to IEC 60076

All technical data are subject to change at any time without notice. SMA assumes no liability for typographical or other errors.



Reservoir Storage Unit

Modular, Scalable Solutions For Utility Scale Applications

RSU-4000 Series

Overview	RSU-4000/20	RSU-4000/16	RSU-4000/12
	RSU-4000/20	RSU-4000/16	RSU-4000/12
Overview			
Nameplate Energy Capacity (KWh.dc, usable)	4184	3347.2	2510.4
Individual Battery Blades - Factory Installed	20 of 20	16 of 20	12 of 20
Maximum Power - Factory Installed (KW.dc)	1200	960	720
Maximum DC Current - Factory Installed (A)	1600	1280	960
Available Augmentation Capacity (% BOL)	0%	25%	67%
Available Augmentation Capacity (kWh.dc)	N/A	836.8	1673.6
Key Features			
Battery Management System		GE Blade Protection Unit (BPU)	
Compatible Inverters		GE RIU-2750MV	
Remote Management		Reservoir Suite	
Solar DC Coupling		Yes (DC:AC Ratio <2.8)	
Integrated PV Combiner		Yes	
Integrated Lockable Disconnect		Module & Rack Level	
Augmentation Options for Lifecycle Management		Yes	
DC Bus Control		DC-IQ Intelligent Bus	
Battery LifeCycle Management		Digital Twin Life Optimization - Optional	
Unit Validation		Factory Built & Tested	
Design life (years)		25	
Battery Information			
Battery Chemistry		Lithium-Ion, NCM	
Battery Module Design		Energy	
Continuous C-Rate		<C/3	
Pulse C-Rate		<C/3	
Voltage Class		1500V	
Nominal DC Voltage (V)		1300	
Minimum DC Voltage (V)		770	
Mechanical Information			
Package Format		20' ISO w/Exterior Acces	
Dimensions (mm) (L X W X H)		6058 x 2438 x 2890 mm	
Weight (kg)	37k	31k	25k
Fully Integrated HVAC		Dual Self-Contained 3 Ton Units (High Efficiency 10. EER)	
- Hot Climate Upgrade		+33% Cooling Capacity	
- Cold Climate Upgrade		+ Electric Heating Package	
Fire Suppression - Aerosol		Optional	
Installation		Pad/Pier	
Cable Entry		Bottom	
Weatherization		NEMA 3R, IP54	
Design Conditions			
Min Operating Temperature (C)		-40°C	
Max operating Temperature (C)		50°C (55°C w/ hot climate upgrade)	
Maximum Altitude (m)		2000	
Maximum Relative Humidity (%)		95%, non-condensing	
Seismic Zone		UBC Zone-4	
Audible Noise		<60 dB at 3M	
Certifications & Compliance			
Certifications		UN38.3, UL 1973, UL 508C, CE	
Compliance		UL1642, UNDOT 38.3, IEC 62477-1, NFPA 70E, IEC 50110, ASTM4169, IEEE 605, IEEE C37.32	