



Comune di : BONORVA
Provincia di : SASSARI
Regione : SARDEGNA



PROPONENTE

SOLARSAP UNO SRL

Via di Selva Candida, 452
00166 ROMA (RM)
P.I. 17164341004

OPERA

PROGETTO DEFINITIVO

IMPIANTO DI PRODUZIONE DI ENERGIA ELETTRICA DA FONTE
RINNOVABILE AGRIVOLTAICA DI POTENZA NOMINALE PARI A
42.344,64 kWp E RELATIVE OPERE DI CONNESSIONE ALLA RETE RTN

"SOLARE BONORVA S'ENA 'E SUNIGO"

OGGETTO

TITOLO ELABORATO :

SCHEDA TECNICA INVERTER

DATA : 09 agosto 2023

N°/CODICE ELABORATO :

SCALA : ---

Tipologia : REL (ELABORATI)

EL 035

I TECNICI

PROGETTISTI:



EDILSAP s.r.l.
Via di Selva Candida, 452
00166 ROMA
Ing. Fernando Sonnino
Project Manager

TIMBRI E FIRME:



00	202203491	Emissione per Progetto Definitivo - Istanza di VIA e A.U.	EDILSAP srl	Ing. Fernando Sonnino	Ing. Fernando Sonnino
N° REVISIONE	Cod. STMG	OGGETTO DELLA REVISIONE	ELABORAZIONE	VERIFICA	APPROVAZIONE
Proprietà e diritto del presente documento sono riservati - la riproduzione è vietata					

MV POWER STATION

2200 / 2475 / 2500 / 2750 / 3000



MVPS 2200-20 / MVPS 2475-20 / MVPS 2500-20 / MVPS 2750-20 / MVPS 3000-20



Robust

- Station and all individual components type-tested
- Optimally suited to extreme ambient conditions

Easy to Use

- Plug and play concept
- Walk-in control rooms
- Completely pre-assembled for easy set-up and commissioning

Cost-Effective

- Easy planning and installation
- Low transport costs due to 20-foot container

Flexible

- Global solution for international markets
- Numerous options
- Compatible with MVPS 4400 – MVPS 6000

MV POWER STATION 2200 / 2475 / 2500 / 2750 / 3000

Turnkey Solution for PV Power Plants

With the power of the new robust central inverters, the Sunny Central or Sunny Central Storage, and with perfectly adapted medium-voltage components, the new MV Power Station offers even more power density and is a turnkey solution available worldwide. The solution is the ideal choice for new generation PV power plants operating at 1500 V_{DC}. Delivered pre-configured in a 20-foot container, the solution is easy to transport and quick to assemble and commission. The MVPS and all components are type-tested. The MV Power Station combines rigorous plant safety with maximum energy yield and minimized deployment and operating risk.

MV POWER STATION


2200 / 2475 / 2500 / 2750 / 3000

Technical Data	MV Power Station 2200
Input (DC)	
Available inverters	1 x SC 2200 or 1 x SCS 2200
Max. input voltage	1100 V
Max. input current	3960 A
Number of DC inputs	24 double pole fused (32 single pole fused)
Integrated zone monitoring	○
Available DC fuse sizes (per input)	200 A, 250 A, 315 A, 350 A, 400 A, 450 A, 500 A
Output (AC) on the medium-voltage side	
Standard power at 1000 m and $\cos \varphi = 1$ (at 35 °C / at 40 °C / at 45 °C) ¹⁾	2200 kVA / 2000 kVA / 0 kVA
Optionale power at 1000 m and $\cos \varphi = 1$ (at 35 °C / at 50 °C / at 55 °C) ¹⁾	2200 kVA / 2000 kVA / 0 kVA
Typical nominal AC voltages	6.6 kV to 35 kV
AC power frequency	50 Hz / 60 Hz
Transformer vector group Dy11 / YNd11	● / ○
Transformer cooling methods ONAN ²⁾ / KNAN ²⁾	● / ○
Max. output current at 33 kV	39 A
Transformer no-load losses Standard / Ecodesign ³⁾	● / ○
Transformer short-circuit losses Standard / Ecodesign ³⁾	● / ○
Max. total harmonic distortion	< 3%
Reactive power feed-in	○ up to 60% of AC power
Power factor at rated power / displacement power factor adjustable	1 / 0.8 overexcited to 0.8 underexcited
Inverter efficiency	
Max. efficiency	98.6%
European efficiency	98.4%
CEC weighted efficiency ⁴⁾	98.0%
Protective devices	
Input-side disconnection point	DC load-break switch
Output-side disconnection point	Medium-voltage vacuum circuit breaker
DC overvoltage protection	Surge arrester type I
Galvanic isolation	●
Internal arc classification medium-voltage control room (according to IEC 62271-202)	IAC A 20 kA 1 s
General Data	
Dimensions of the 20-foot ISO container (W / H / D) ⁵⁾	6.058 m / 2.591 m / 2.438 m
Weight	< 16 t
Self-consumption (max. / partial load / average) ¹⁾	< 8.1 kW / < 1.8 kW / < 2.0 kW
Self-consumption (stand-by) ¹⁾	< 300 W
Degree of protection according to IEC 60529	Control rooms IP23D, inverter electronics IP65
Environment: standard / chemically active / dusty	● / ○ / ○
Degree of protection according to IEC 60721-3-4 (4C1, 4S2 / 4C2, 4S2 / 4C2, 4S4)	● / ○ / ○
Maximum permissible value for relative humidity	15% to 95%
Max. operating altitude above mean sea level 1000 m / 2000 m / 3000 m / 4000	● / ○ / ○ / ○ (earlier temperature-dependent de-rating)
Fresh air consumption of inverter and transformer	6500 m ³ /h
Features	
DC terminal	Terminal lug
AC connection	Outer-cone angle plug
Tap changer for MV-transformer: without / with	● / ○
Shield winding for MV-Transformer: without / with	● / ○
Communication package	○
Station enclosure color	RAL 7004
Transformer for external loads: without / 20 kVA / 30 kVA	● / ○ / ○
Medium-voltage switchgear: without / 2 feeders / 3 feeders	● / ○ / ○
1 or 2 cable feeders with load-break switch, 1 transformer feeder with circuit breaker, internal arc classification IAC A FL 20 kA 1 s according to IEC 62271-200	
Accessories for medium-voltage switchgear: without / auxiliary contacts / motor for transformer feeder / cascade control / monitoring	● / ○ / ○ / ○ / ○
Oil containment	○
Industry standards (for other standards see the inverter datasheet)	IEC 62271-202, IEC 62271-200, IEC 60076 , CSC certificate, EN 50588-1
● Standard features ○ Optional features – Not available	
Type designation	MVPS-2200-20


- 1) Data based on inverter
- 2) ONAN = Mineral oil with natural air cooling; KNAN = Organic oil with natural air cooling
- 3) Losses in accordance with the Ecodesign regulations, EN 50588-1
- 4) Efficiency measured at inverter with internal power supply
- 5) Transport dimensions

MV Power Station 2475	MV Power Station 2500	MV Power Station 2750	MV Power Station 3000
1 x SC 2475 or 1 x SCS 2475	1 x SC 2500-EV or 1 x SCS 2500-EV	1 x SC 2750-EV or 1 x SCS 2750-EV	1 x SC 3000-EV or 1 x SCS 3000-EV
1100 V	1500 V	1500 V	1500 V
3960 A	3200 A	3200 A	3200 A
24 double pole fused (32 single pole fused)			
○	○	○	○
200 A, 250 A, 315 A, 350 A, 400 A, 450 A, 500 A			
2475 kVA / 2250 kVA / 0 kVA	2500 kVA / 2250 kVA / 0 kVA	2750 kVA / 2500 kVA / 0 kVA	3000 kVA / 2700 kVA / 0 kVA
2475 kVA / 2250 kVA / 0 kVA	2500 kVA / 2250 kVA / 0 kVA	2750 kVA / 2500 kVA / 0 kVA	3000 kVA / 2700 kVA / 0 kVA
6.6 kV to 35 kV	6.6 kV to 35 kV	6.6 kV to 35 kV	6.6 kV to 35 kV
50 Hz / 60 Hz	50 Hz / 60 Hz	50 Hz / 60 Hz	50 Hz / 60 Hz
● / ○	● / ○	● / ○	● / ○
● / ○	● / ○	● / ○	● / ○
43 A	44 A	49 A	53 A
● / ○	● / ○	● / ○	● / ○
● / ○	● / ○	● / ○	● / ○
< 3%	< 3%	< 3%	< 3%
○ up to 60% of AC power	○ up to 60% of AC power	○ up to 60% of AC power	○ up to 60% of AC power
1 / 0.8 overexcited to 0.8 underexcited	1 / 0.8 overexcited to 0.8 underexcited	1 / 0.8 overexcited to 0.8 underexcited	1 / 0.8 overexcited to 0.8 underexcited
98.6%	98.6%	98.7%	98.7%
98.4%	98.3%	98.6%	98.6%
98.0%	98.0%	98.5%	98.5%
DC load-break switch	DC load-break switch	DC load-break switch	DC load-break switch
Medium-voltage vacuum circuit breaker	Medium-voltage vacuum circuit breaker	Medium-voltage vacuum circuit breaker	Medium-voltage vacuum circuit breaker
Surge arrester type I	Surge arrester type I	Surge arrester type I	Surge arrester type I
●	●	●	●
IAC A 20kA 1s	IAC A 20kA 1s	IAC A 20kA 1s	IAC A 20kA 1s
6.058 m / 2.591 m / 2.438 m	6.058 m / 2.591 m / 2.438 m	6.058 m / 2.591 m / 2.438 m	6.058 m / 2.591 m / 2.438 m
< 16 t	< 16 t	< 16 t	< 16 t
< 8.1 kW / < 1.8 kW / < 2.0 kW	< 8.1 kW / < 1.8 kW / < 2.0 kW	< 8.1 kW / < 1.8 kW / < 2.0 kW	< 8.1 kW / < 1.8 kW / < 2.0 kW
< 300 W	< 370 W	< 370 W	< 370 W
Control rooms IP23D, inverter electronics IP65			
● / ○ / ○	● / ○ / ○	● / ○ / ○	● / ○ / ○
● / ○ / ○	● / ○ / ○	● / ○ / ○	● / ○ / ○
15% to 95%	15% to 95%	15% to 95%	15% to 95%
● / ○ / ○ / ○ (earlier temperature-dependent de-rating)	● / ○ / ○ / - (earlier temperature-dependent de-rating)		
6500 m³/h	6500 m³/h	6500 m³/h	6500 m³/h
Terminal lug	Terminal lug	Terminal lug	Terminal lug
Outer-cone angle plug	Outer-cone angle plug	Outer-cone angle plug	Outer-cone angle plug
● / ○	● / ○	● / ○	● / ○
● / ○	● / ○	● / ○	● / ○
○	○	○	○
RAL 7004	RAL 7004	RAL 7004	RAL 7004
● / ○ / ○	● / ○ / ○	● / ○ / ○	● / ○ / ○
● / ○ / ○	● / ○ / ○	● / ○ / ○	● / ○ / ○
● / ○ / ○ / ○ / ○	● / ○ / ○ / ○ / ○	● / ○ / ○ / ○ / ○	● / ○ / ○ / ○ / ○
○	○	○	○
IEC 62271-202, IEC 62271-200, IEC 60076 , CSC certificate, EN 50588-1			
MVPS-2475-20	MVPS-2500-20	MVPS-2750-20	MVPS-3000-20

System diagram with Sunny Central

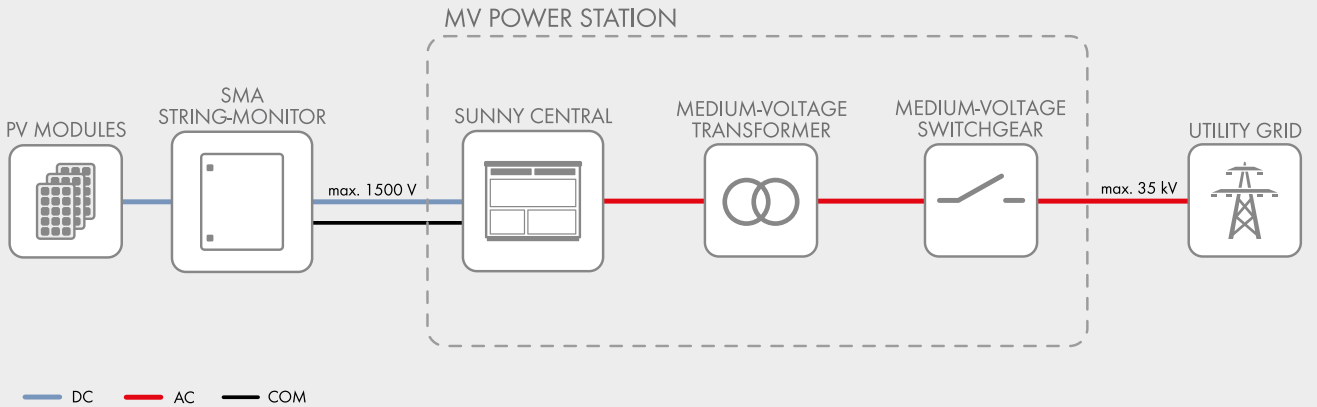

System diagram with Sunny Central Storage

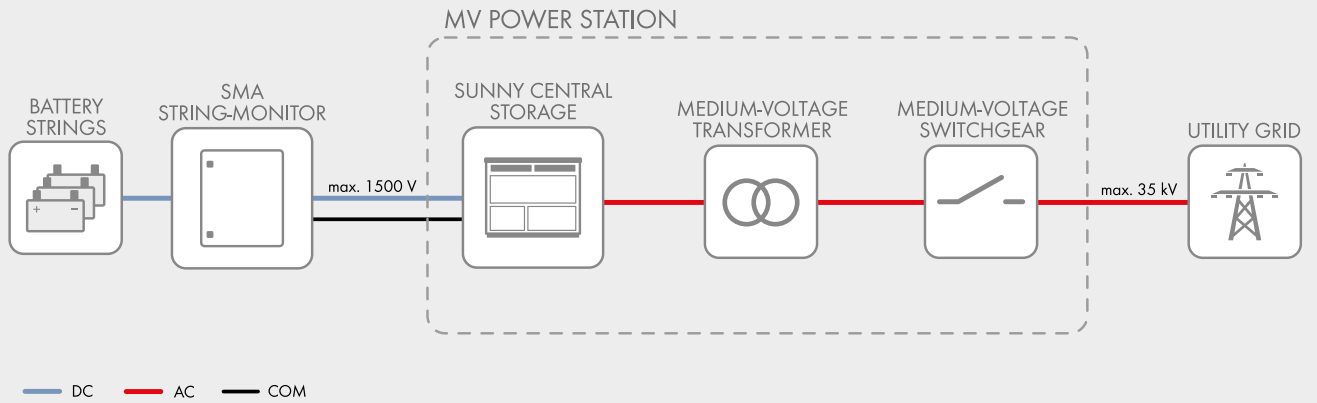

SUNNY CENTRAL

2200 / 2475 / 2500-EV / 2750-EV / 3000-EV



SC-2200-10 / SC-2475-10 / SC-2500-EV-10 / SC-2750-EV-10 / SC-3000-EV-10



Optional now with
DC Coupled Storage Systems
for 1500V devices

Full power up to 35 °C

Efficient

- Up to 4 inverters can be transported in one standard shipping container
- Overdimensioning up to 225% is possible
- Full power at ambient temperatures of up to 35 °C

Robust

- Intelligent air cooling system OptiCool for efficient cooling
- Suitable for outdoor use in all climatic ambient conditions worldwide

Flexible

- Conforms to all known grid requirements worldwide
- Q on demand
- Available as a single device or turnkey solution, including medium-voltage block

Easy to Use

- Improved DC connection area
- Connection area for customer equipment
- Integrated voltage support for internal and external loads

SUNNY CENTRAL 2200 / 2475 / 2500-EV / 2750-EV / 3000-EV

The new Sunny Central: more power per cubic meter

With an output of up to 3000 kVA and system voltages of 1100 V DC or 1500 V DC, the SMA central inverter allows for more efficient system design and a reduction in specific costs for PV power plants. A separate voltage supply and additional space are available for the installation of customer equipment. True 1500 V technology and the intelligent cooling system OptiCool ensure smooth operation even in extreme ambient temperature as well as a long service life of 25 years.

SUNNY CENTRAL 1000 V

Technical Data	Sunny Central 2200	Sunny Central 2475
Input (DC)		
MPP voltage range V_{DC} (at 25 °C / at 35 °C / at 50 °C)	570 to 950 V / 800 V / 800 V	638 V to 950 V / 800 V / 800 V
Min. input voltage $V_{DC, min}$ / Start voltage $V_{DC, Start}$	545 V / 645 V	614 V / 714 V
Max. input voltage $V_{DC, max}$	1100 V	1100 V
Max. input current $I_{DC, max}$ (at 35 °C / at 50 °C)	3960 A / 3600 A	3960 A / 3600 A
Max. short-circuit current $I_{DC, sc}$	6400 A	6400 A
Number of DC inputs	24 double pole fused (32 single pole fused)	
Max. number of DC cables per DC input (for each polarity)	2 x 800 kcmil, 2 x 400 mm ²	
Integrated zone monitoring	○	
Available DC fuse sizes (per input)	200 A, 250 A, 315 A, 350 A, 400 A, 450 A, 500 A	
Output (AC)		
Nominal AC power at $\cos \varphi = 1$ (at 35 °C / at 50 °C)	2200 kVA / 2000 kVA	2475 kVA / 2250 kVA
Nominal AC power at $\cos \varphi = 0.8$ (at 35 °C / at 50 °C)	1760 kW / 1600 kW	1980 kW / 1800 kW
Nominal AC current $I_{AC, nom} = \text{Max. output current } I_{AC, max}$	3300 A	3300 A
Max. total harmonic distortion	< 3% at nominal power	
Nominal AC voltage / nominal AC voltage range ^{1) 8)}	385 V / 308 V to 462 V	434 V / 347 V to 521 V
AC power frequency / range	50 Hz / 47 Hz to 53 Hz 60 Hz / 57 Hz to 63 Hz	
Min. short-circuit ratio at the AC terminals ⁹⁾	> 2	
Power factor at rated power / displacement power factor adjustable ^{8) 10)}	● 1 / 0.8 overexcited to 0.8 underexcited ○ 1 / 0.0 overexcited to 0.0 underexcited	
Efficiency		
Max. efficiency ²⁾ / European efficiency ²⁾ / CEC efficiency ³⁾	98.6% / 98.4% / 98.0%	98.6% / 98.4% / 98.0%
Protective Devices		
Input-side disconnection point	DC load break switch	
Output-side disconnection point	AC circuit breaker	
DC overvoltage protection	Surge arrester, type I	
AC overvoltage protection (optional)	Surge arrester, class I	
Lightning protection (according to IEC 62305-1)	Lightning Protection Level III	
Ground-fault monitoring / remote ground-fault monitoring	○ / ○	
Insulation monitoring	○	
Degree of protection: electronics / air duct / connection area (as per IEC 60529)	IP65 / IP34 / IP34	
General Data		
Dimensions (W / H / D)	2780 / 2318 / 1588 mm (109.4 / 91.3 / 62.5 inch)	
Weight	< 3400 kg / < 7496 lb	
Self-consumption (max. ⁴⁾ / partial load ⁵⁾ / average ⁶⁾)	< 8100 W / < 1800 W / < 2000 W	
Self-consumption (standby)	< 300 W	
Internal auxiliary power supply	Integrated 8.4 kVA transformer	
Operating temperature range ⁸⁾	-25 °C to 60 °C / -13 °F to 140 °F	
Noise emission ⁷⁾	64.7 dB(A)	
Temperature range (standby)	-40 °C to 60 °C / -40 °F to 140 °F	
Temperature range (storage)	-40 °C to 70 °C / -40 °F to 158 °F	
Max. permissible value for relative humidity (condensing / non-condensing)	95% to 100% (2 month/year) / 0% to 95%	
Maximum operating altitude above MSL ⁸⁾ 1000 m / 2000 m ¹¹⁾ / 3000 m ¹¹⁾ / 4000 m ¹¹⁾	● / ○ / ○ / ○	
Fresh air consumption	6500 m ³ /h	
Features		
DC connection	Terminal lug on each input (without fuse)	
AC connection	With busbar system (three busbars, one per line conductor)	
Communication	Ethernet, Modbus Master, Modbus Slave	
Communication with SMA string monitor (transmission medium)	Modbus TCP / Ethernet (FO MM, Cat-5)	
Enclosure / roof color	RAL 9016 / RAL 7004	
Supply transformer for external loads	○ (2.5 kVA)	
Standards and directives complied with	CE, IEC / EN 62109-1, IEC / EN 62109-2, BDEW-MSRL, IEEE1547, UL 840 Cat. IV, Arrêté du 23/04/08	
EMC standards	IEC / EN 61000-6-2, FCC Part 15 Class A, Cisp11, DIN EN55011:2017	
Quality standards and directives complied with	VDI/VDE 2862 page 2, DIN EN ISO 9001	
● Standard features ○ Optional		
Type designation	SC-2200-10	SC-2475-10

1) At nominal AC voltage, nominal AC power decreases in the same proportion
 2) Efficiency measured without internal power supply
 3) Efficiency measured with internal power supply
 4) Self-consumption at rated operation
 5) Self-consumption at < 75% Pn at 25 °C
 6) Self-consumption averaged out from 5% to 100% Pn at 25 °C

7) Sound pressure level at a distance of 10 m
 8) Values apply only to inverters. Permissible values for SMA MV solutions from SMA can be found in the corresponding data sheets.
 9) A short-circuit ratio of < 2 requires a special approval from SMA
 10) Depending on the DC voltage
 11) Earlier temperature-dependent de-rating and reduction of DC open-circuit voltage

SUNNY CENTRAL 1500 V

Technical Data	Sunny Central 2500-EV	Sunny Central 2750-EV	Sunny Central 3000-EV
Input (DC)			
MPP voltage range V_{DC} (at 25 °C / at 35 °C / at 50 °C)	850 V to 1425 V / 1200 V / 1200 V	875 V to 1425 V / 1200 V / 1200 V	956 V to 1425 V / 1200 V / 1200 V
Min. input voltage $V_{DC, min}$ / Start voltage $V_{DC, Start}$	778 V / 928 V	849 V / 999 V	927 V / 1077 V
Max. input voltage $V_{DC, max}$	1500 V	1500 V	1500 V
Max. input current $I_{DC, max}$ (at 35 °C / at 50 °C)	3200 A / 2956 A	3200 A / 2956 A	3200 A / 2970 A
Max. short-circuit current rating	6400 A	6400 A	6400 A
Number of DC inputs	24 double pole fused (32 single pole fused) for PV		
Number of DC inputs with optional DC coupled storage	18 double pole fused (36 single pole fused) for PV and 6 double pole fused for batteries		
Max. number of DC cables per DC input (for each polarity)	2 x 800 kcmil, 2 x 400 mm ²		
Integrated zone monitoring	○		
Available DC fuse sizes (per input)	200 A, 250 A, 315 A, 350 A, 400 A, 450 A, 500 A		
Output (AC)			
Nominal AC power at $\cos \phi = 1$ (at 35 °C / at 50 °C)	2500 kVA / 2250 kVA	2750 kVA / 2500 kVA	3000 kVA / 2700 kVA
Nominal AC power at $\cos \phi = 0.8$ (at 35 °C / at 50 °C)	2000 kW / 1800 kW	2200 kW / 2000 kW	2400 kW / 2160 kW
Nominal AC current $I_{AC, nom} = \text{Max. output current } I_{AC, max}$	2624 A	2646 A	2646 A
Max. total harmonic distortion	< 3% at nominal power	< 3% at nominal power	< 3% at nominal power
Nominal AC voltage / nominal AC voltage range ^{1) 8)}	550 V / 440 V to 660 V	600 V / 480 V to 720 V	655 V / 524 V to 721 V ⁹⁾
AC power frequency	50 Hz / 47 Hz to 53 Hz 60 Hz / 57 Hz to 63 Hz		
Min. short-circuit ratio at the AC terminals ¹⁰⁾	> 2		
Power factor at rated power / displacement power factor adjustable ^{8) 11)}	● 1 / 0.8 overexcited to 0.8 underexcited ○ 1 / 0.0 overexcited to 0.0 underexcited		
Efficiency			
Max. efficiency ²⁾ / European efficiency ²⁾ / CEC efficiency ³⁾	98.6% / 98.3% / 98.0%	98.7% / 98.5% / 98.5%	98.8% / 98.6% / 98.5%
Protective Devices			
Input-side disconnection point	DC load-break switch		
Output-side disconnection point	AC circuit breaker		
DC overvoltage protection	Surge arrester, type I & II		
AC overvoltage protection (optional)	Surge arrester, class I & II		
Lightning protection (according to IEC 62305-1)	Lightning Protection Level III		
Ground-fault monitoring / remote ground-fault monitoring	○ / ○		
Insulation monitoring	○		
Degree of protection: electronics / air duct / connection area (as per IEC 60529)	IP65 / IP34 / IP34		
General Data			
Dimensions (W / H / D)	2780 / 2318 / 1588 mm (109.4 / 91.3 / 62.5 inch)		
Weight	< 3400 kg / < 7496 lb		
Self-consumption (max. ⁴⁾ / partial load ⁵⁾ / average ⁶⁾	< 8100 W / < 1800 W / < 2000 W		
Self-consumption (standby)	< 370 W		
Internal auxiliary power supply	Integrated 8.4 kVA transformer		
Operating temperature range ⁶⁾	-25 to 60 °C / -13 to 140 °F		
Noise emission ⁷⁾	67.8 dB(A)		
Temperature range (standby)	-40 to 60 °C / -40 to 140 °F		
Temperature range (storage)	-40 to 70 °C / -40 to 158 °F		
Max. permissible value for relative humidity (condensing / non-condensing)	95% to 100% (2 month / year) / 0% to 95%		
Maximum operating altitude above MSL ⁸⁾ 1000 m / 2000 m ¹²⁾ / 3000 m ¹²⁾	● / ○ / -	● / ○ / -	● / ○ / -
Fresh air consumption	6500 m ³ /h		
Features			
DC connection	Terminal lug on each input (without fuse)		
AC connection	With busbar system (three busbars, one per line conductor)		
Communication	Ethernet, Modbus Master, Modbus Slave		
Communication with SMA string monitor (transmission medium)	Modbus TCP / Ethernet (FO MM, Cat-5)		
Enclosure / roof color	RAL 9016 / RAL 7004		
Supply transformer for external loads	○ (2.5 kVA)		
Standards and directives complied with	CE, IEC / EN 62109-1, IEC / EN 62109-2, BDEW-MSRL, IEEE1547, Arrêté du 23/04/08		
EMC standards	EN55011:2017, IEC/EN 61000-6-2, FCC Part 15 Class A		
Quality standards and directives complied with	VDI/VDE 2862 page 2, DIN EN ISO 9001		
● Standard features ○ Optional – not available			
Type designation	SC-2500-EV-10	SC-2750-EV-10	SC-3000-EV-10

1) At nominal AC voltage, nominal AC power decreases in the same proportion

2) Efficiency measured without internal power supply

3) Efficiency measured with internal power supply

4) Self-consumption at rated operation

5) Self-consumption at < 75% Pn at 25 °C

6) Self-consumption averaged out from 5% to 100% Pn at 35 °C

7) Sound pressure level at a distance of 10 m

8) Values apply only to inverters. Permissible values for SMA MV solutions from SMA can be found in the corresponding data sheets.


9) AC voltage range can be extended to 753V for 50Hz grids only (option „Aux power supply: external“ must be selected, option “housekeeping” not combinable).

10) A short-circuit ratio of < 2 requires a special approval from SMA


11) Depending on the DC voltage

12) Available as a special version, earlier temperature-dependent de-rating and reduction of DC open-circuit voltage

SYSTEM DIAGRAM

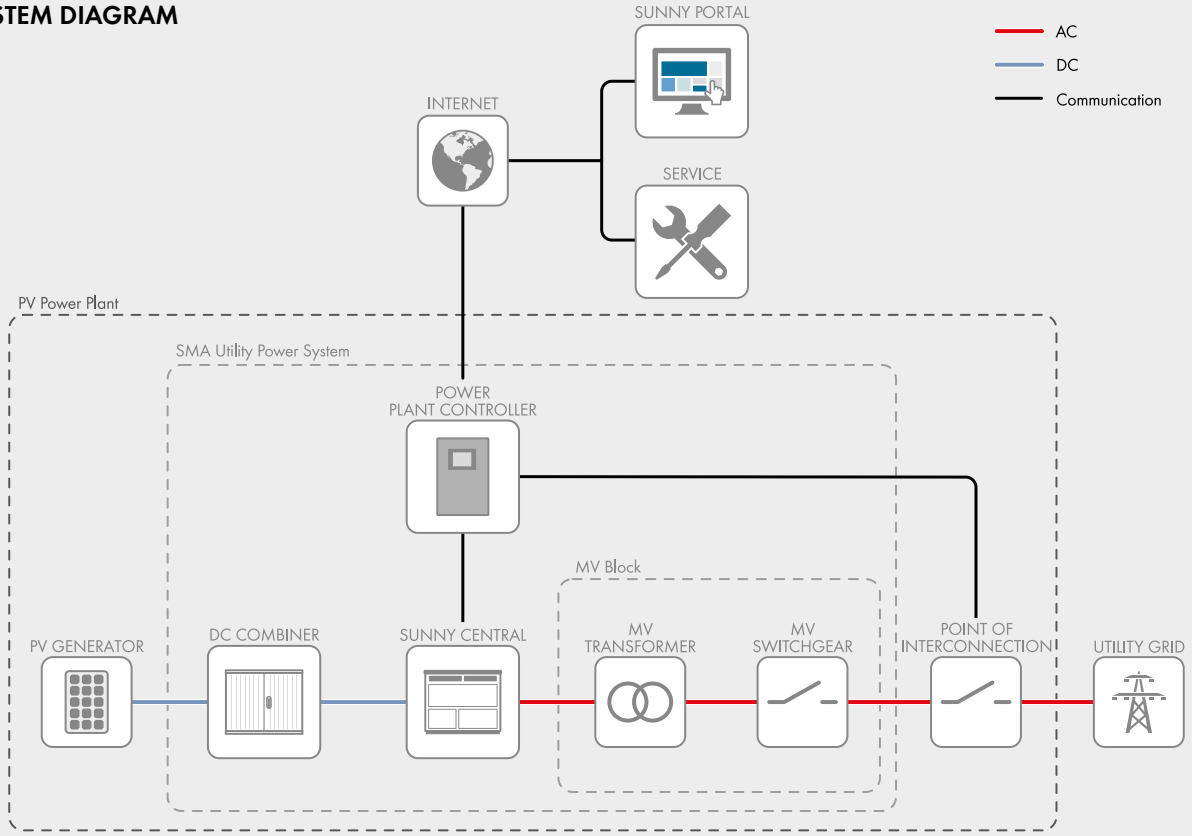

TEMPERATURE BEHAVIOR (at $\cos \varphi = 1$ and installation altitudes of up to 1,000 m*)

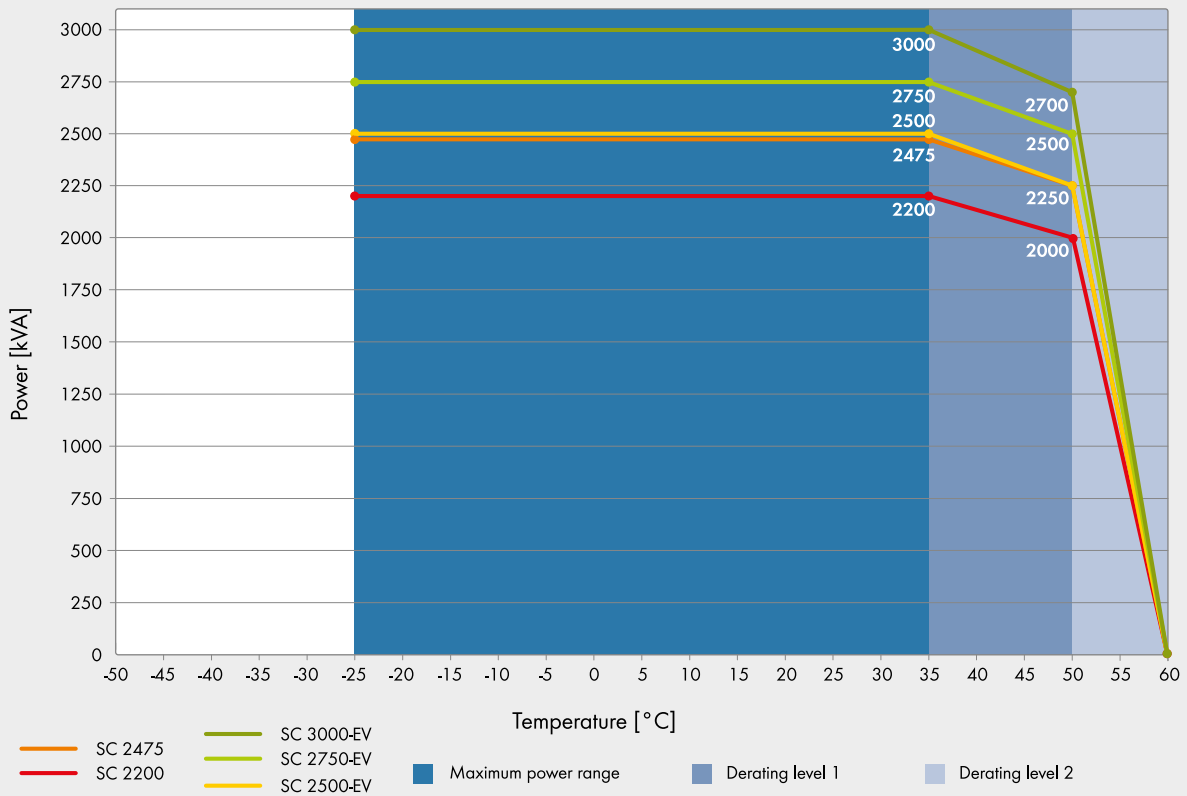

*) For the temperature behavior for installations at above 1,000 m see the Technical Information document.