



ASSE NV38
 SEZIONE N. 2
 PROG. 50.00

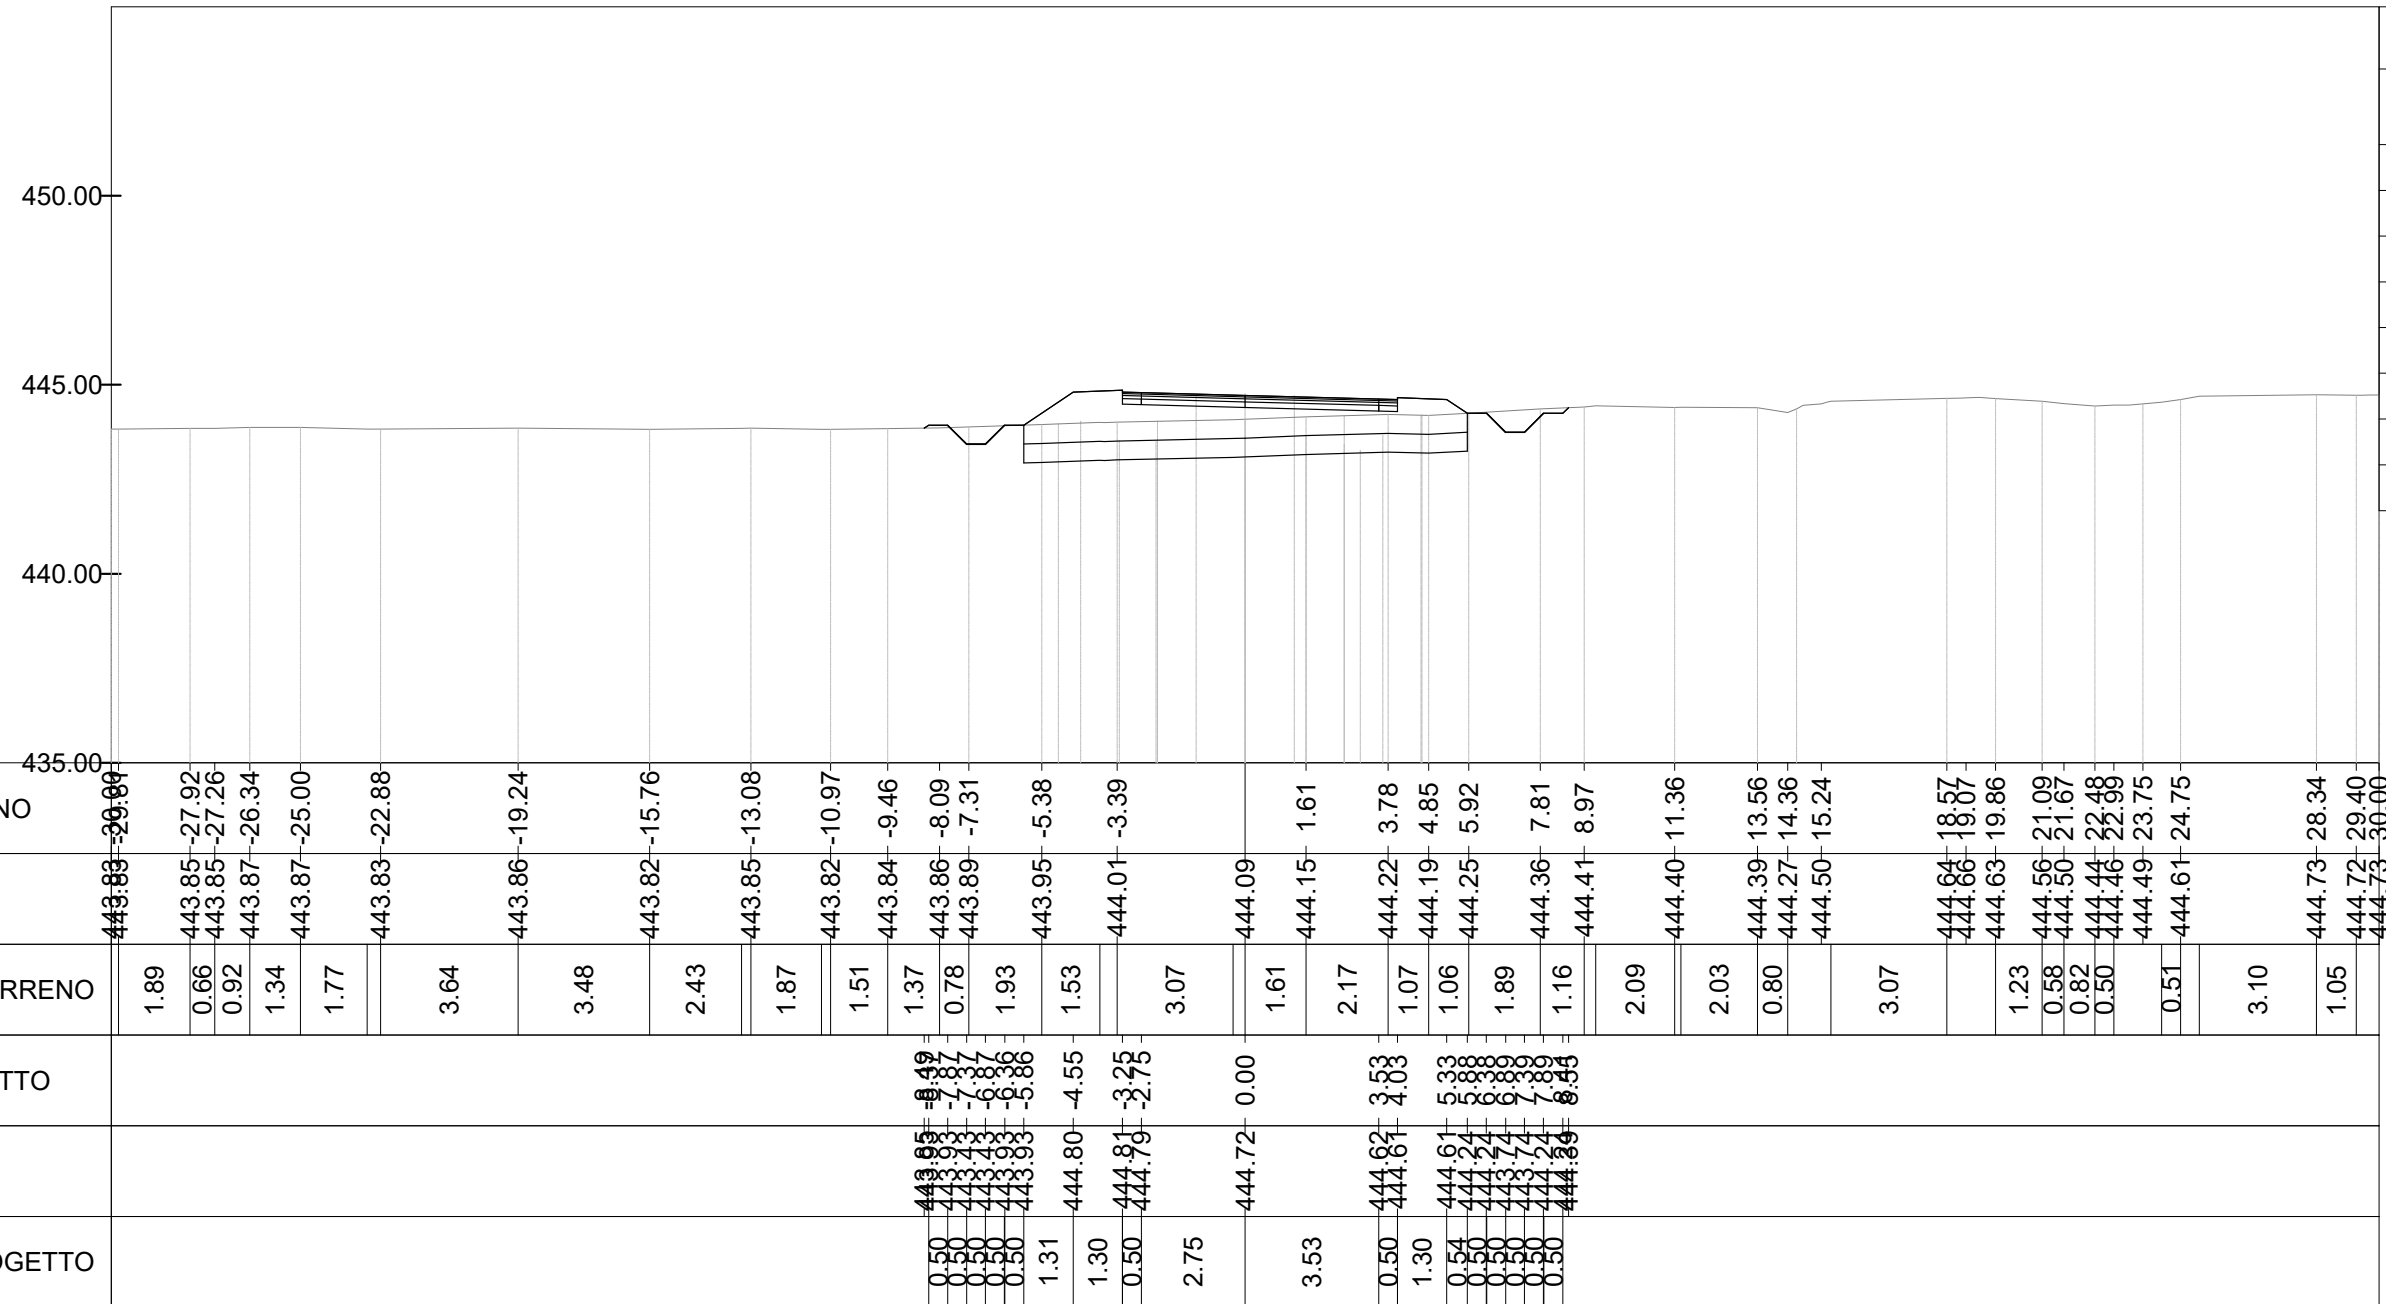


Mat. alla progr. 0+050.00			
Materiale	Area (m²)	Vol. (m³)	Vol. Cum. (m³)
Scavo	1.18	115.77	115.77
Rilevato	4.35	89.90	89.90
Usura	0.29	13.77	13.77
Binder	0.36	17.22	17.22
Base	0.58	27.55	27.55
Fondazione	1.09	51.65	51.65
Scotico	6.13	270.20	270.20
Bonifica	6.13	270.20	270.20

ASSE NV38
SEZIONE N. 3
PROG. 100.00

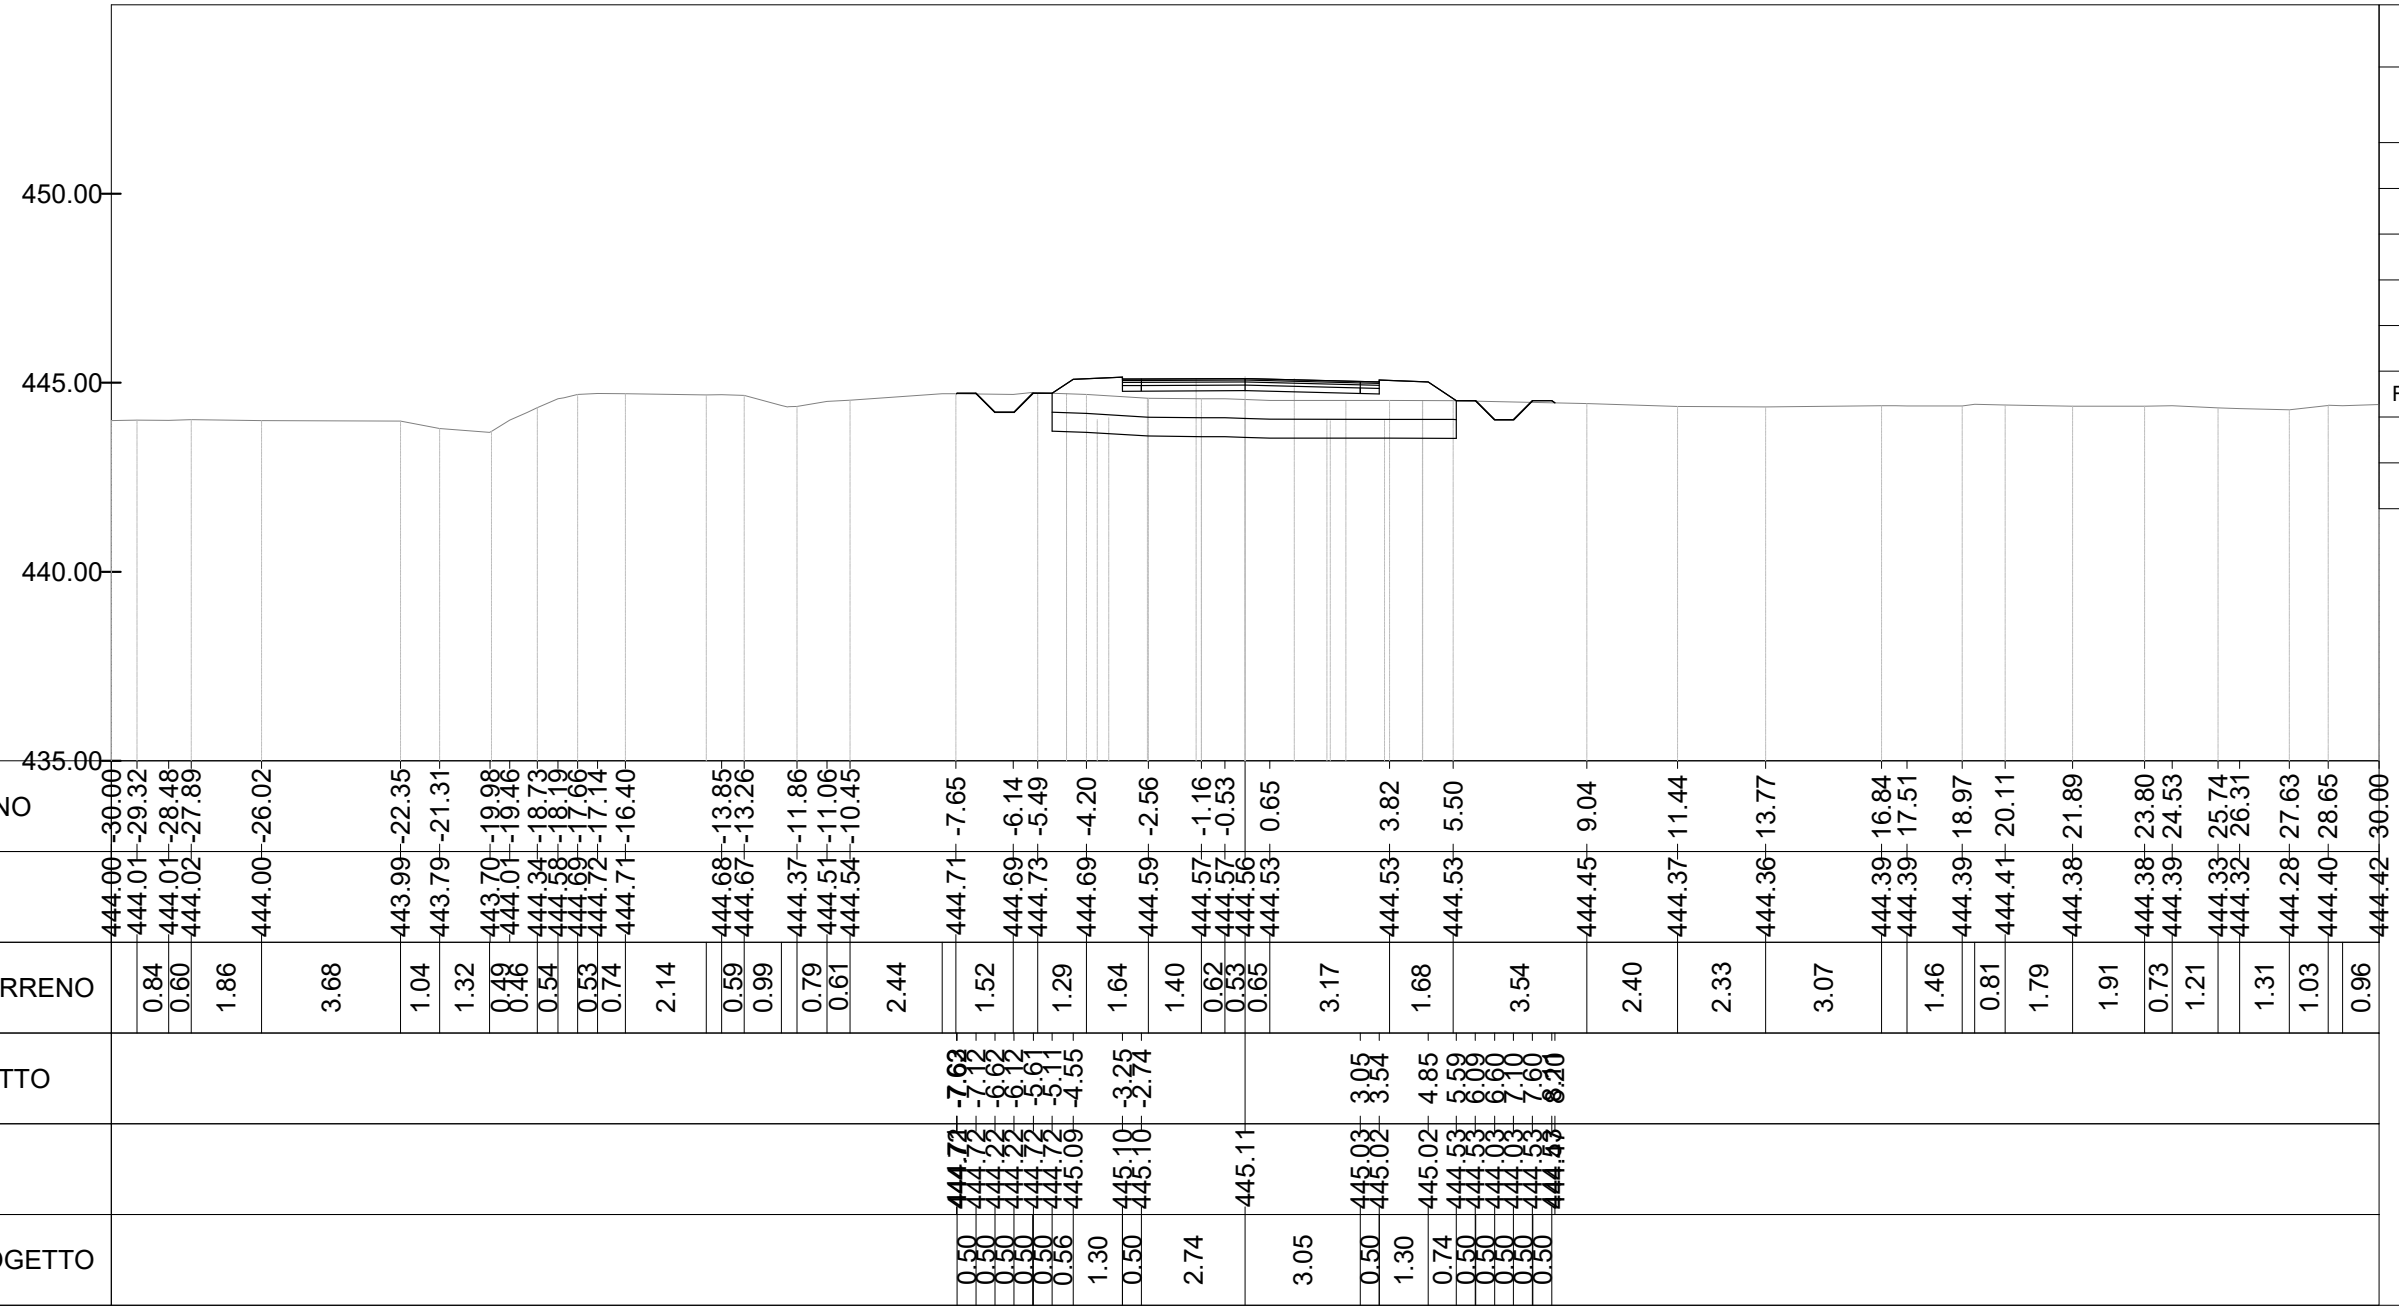


Mat. alla progr. 0+100.00			
Materiale	Area (m²)	Vol. (m³)	Vol. Cum. (m³)
Scavo	0.98	53.83	169.60
Rilevato	2.98	182.12	272.02
Usura	0.27	14.07	27.84
Binder	0.34	17.59	34.80
Base	0.54	28.14	55.69
Fondazione	1.02	52.76	104.41
Scotico	6.87	324.85	595.05
Bonifica	6.87	324.85	595.05

ASSE NV38
SEZIONE N. 5
PROG. 200.00

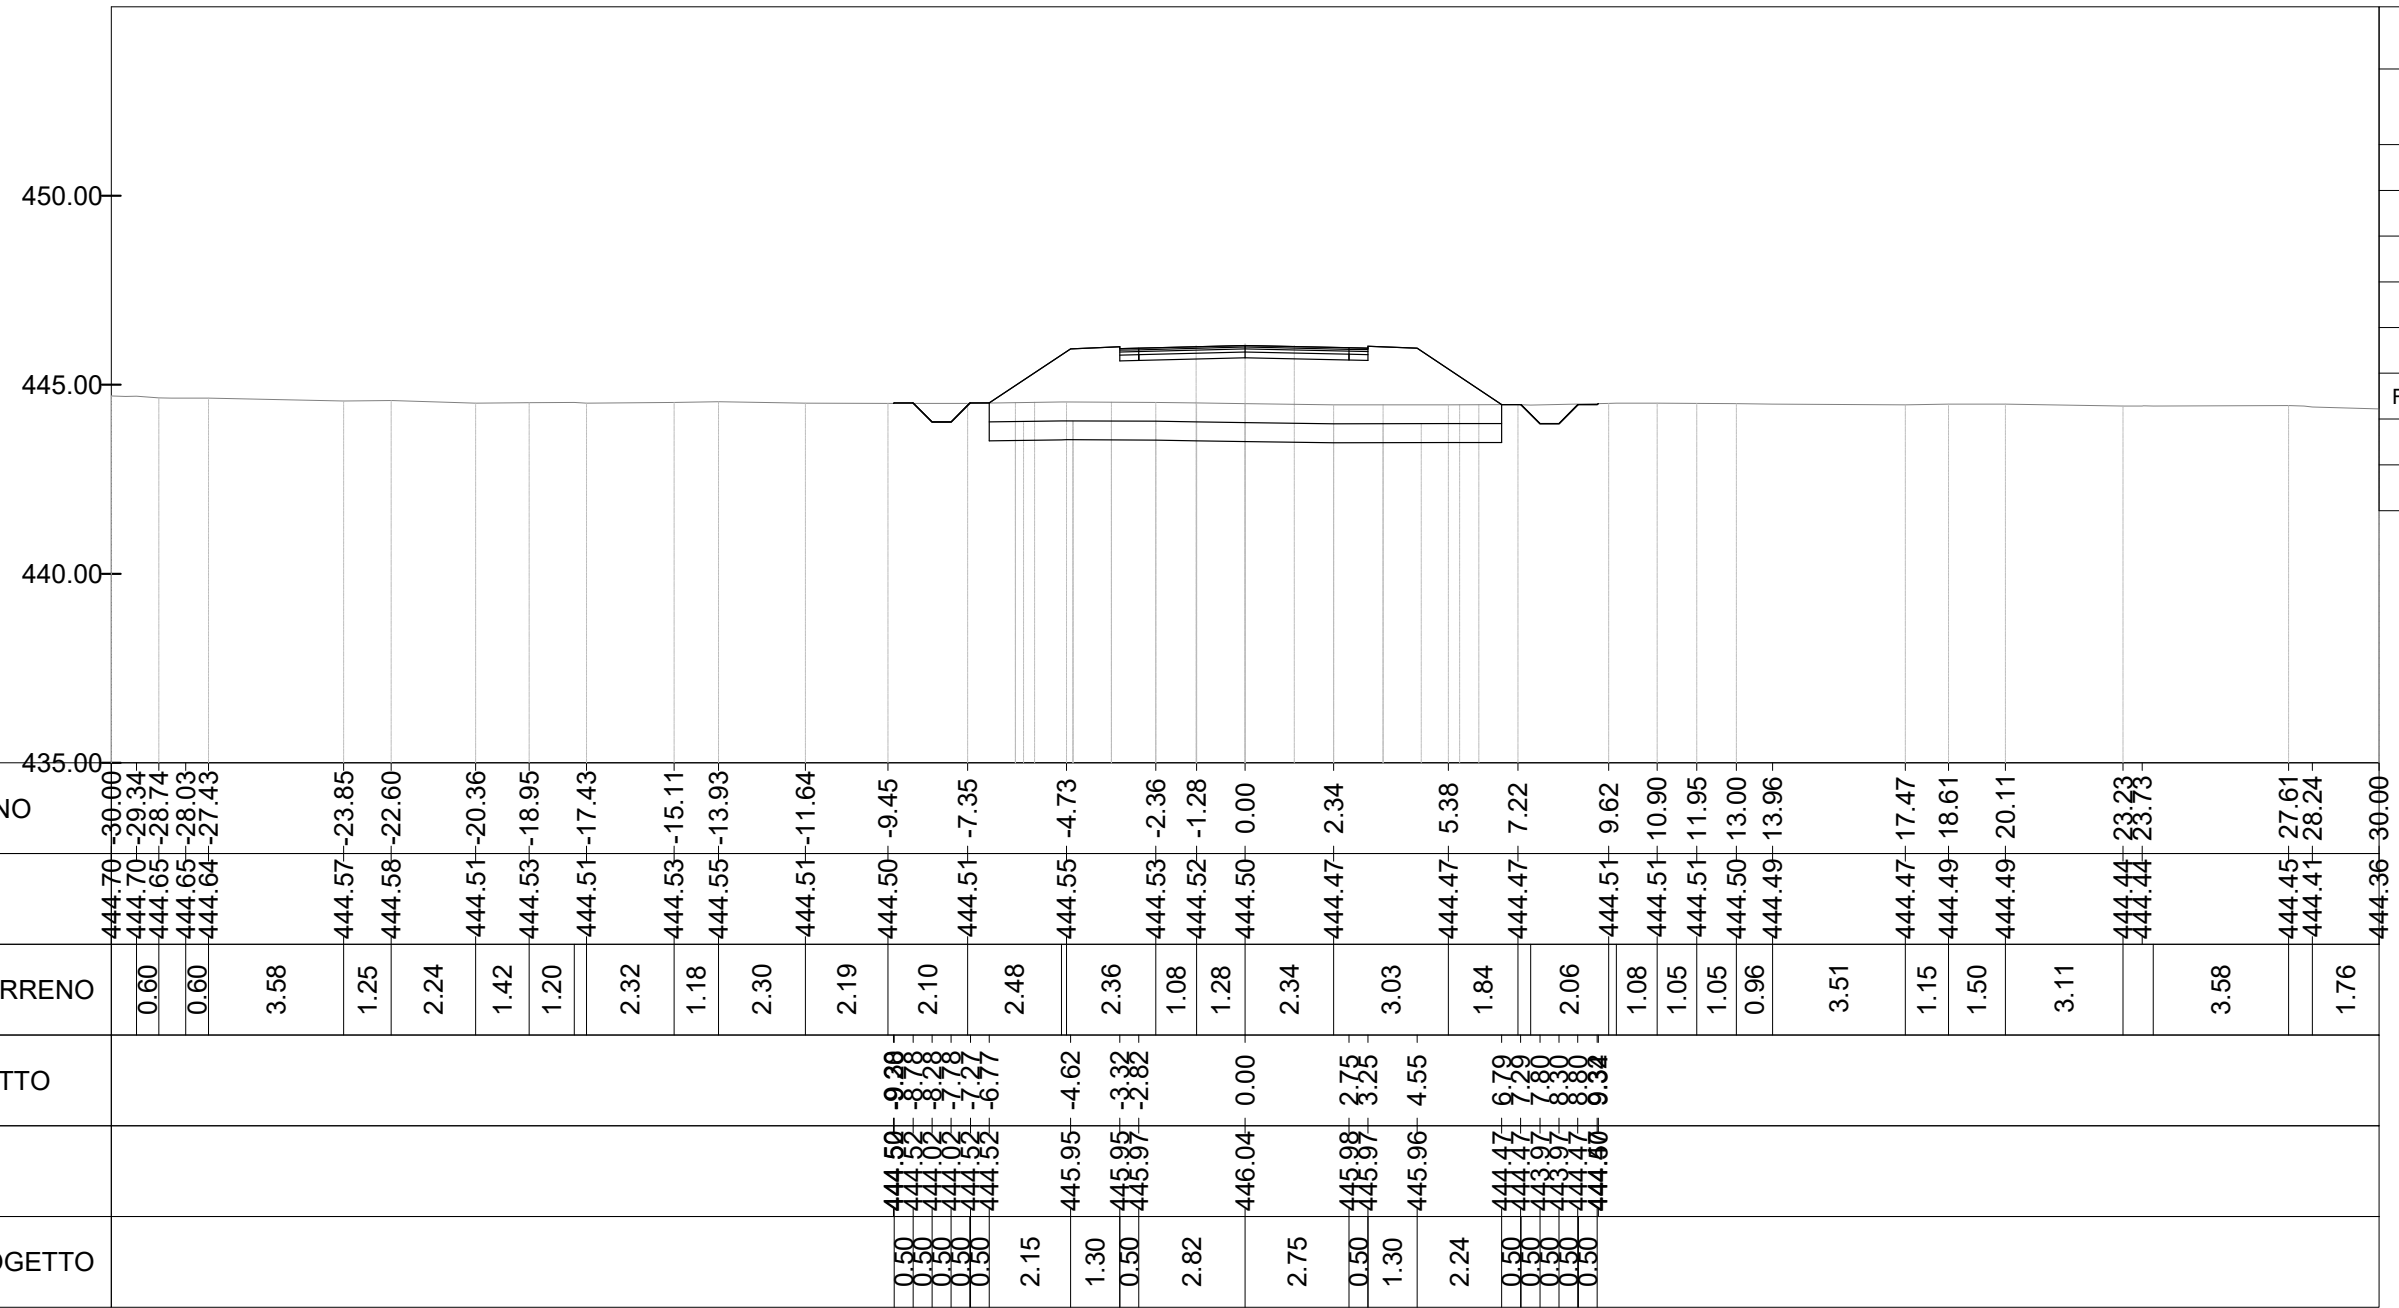


Mat. alla progr. 0+200.00			
Materiale	Area (m²)	Vol. (m³)	Vol. Cum. (m³)
Scavo	1.04	51.13	270.40
Rilevato	14.77	715.63	1375.49
Usura	0.26	13.83	55.73
Binder	0.33	17.29	69.67
Base	0.53	27.66	111.47
Fondazione	0.98	51.87	209.00
Scotico	7.99	411.74	1389.92
Bonifica	7.99	411.74	1389.92

ASSE NV38
SEZIONE N. 6
PROG. 250.00

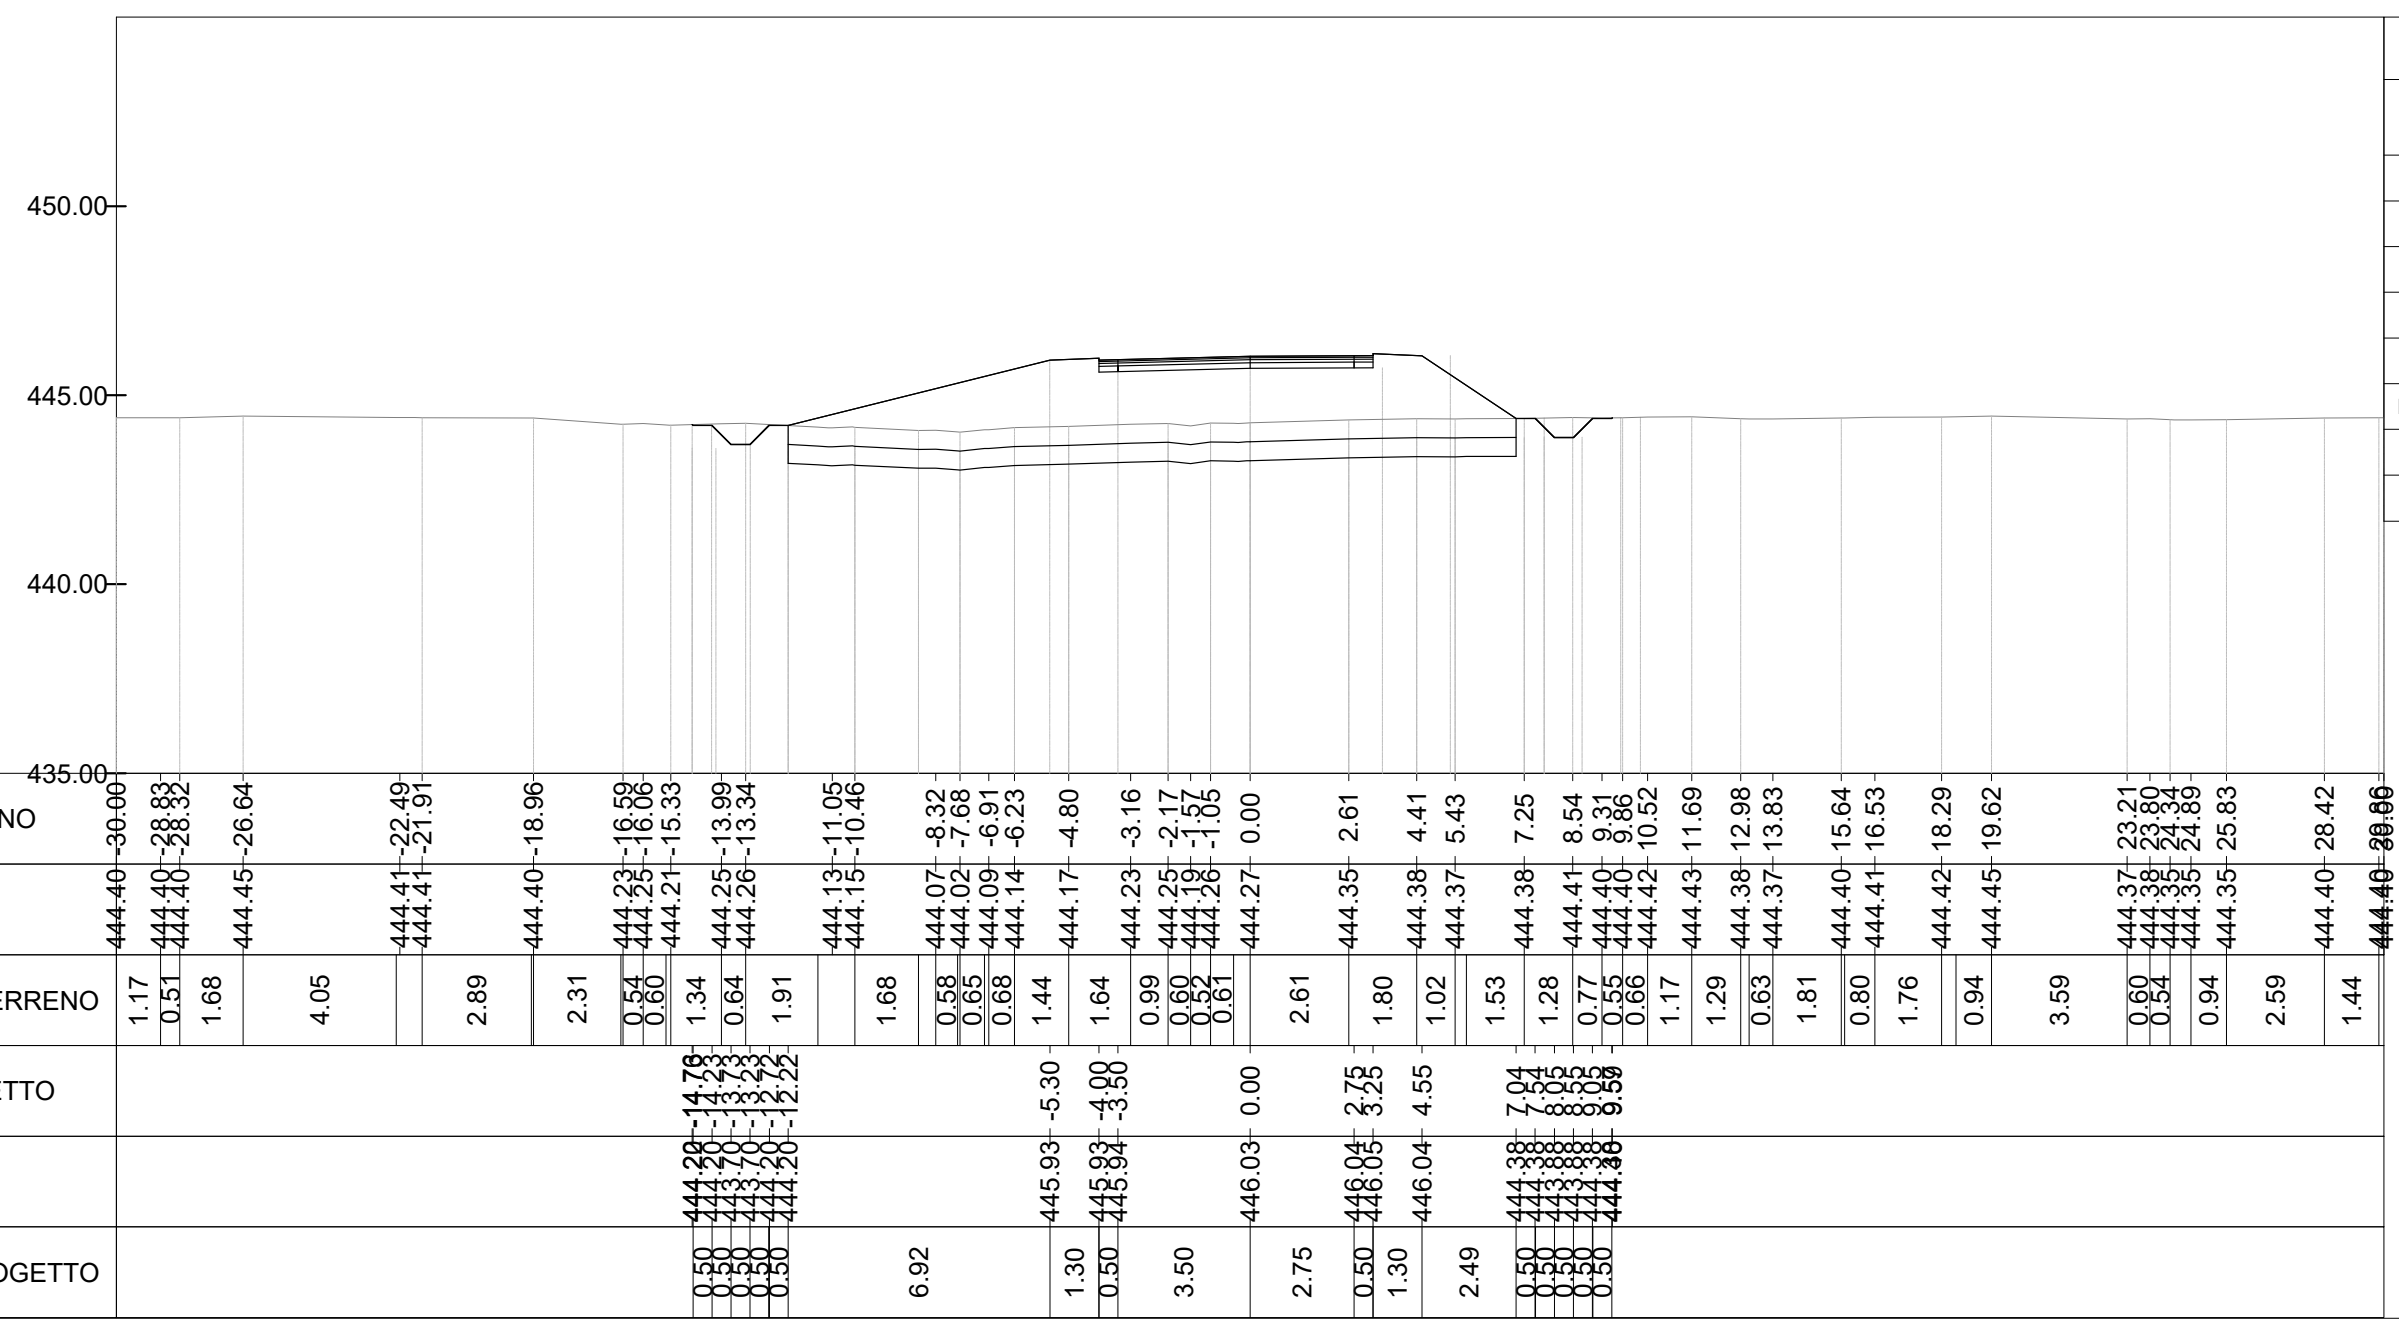

Mat. alla progr. 0+250.00			
Materiale	Area (m²)	Vol. (m³)	Vol. Cum. (m³)
Scavo	1.17	55.15	325.55
Rilevato	23.42	946.29	2321.78
Usura	0.29	13.81	69.54
Binder	0.36	17.26	86.93
Base	0.58	27.62	139.08
Fondazione	1.09	51.78	260.78
Scotico	22.35	728.33	2118.25
Bonifica	22.35	728.33	2118.25


ASSE NV38
SEZIONE N. 7
PROG. 300.00

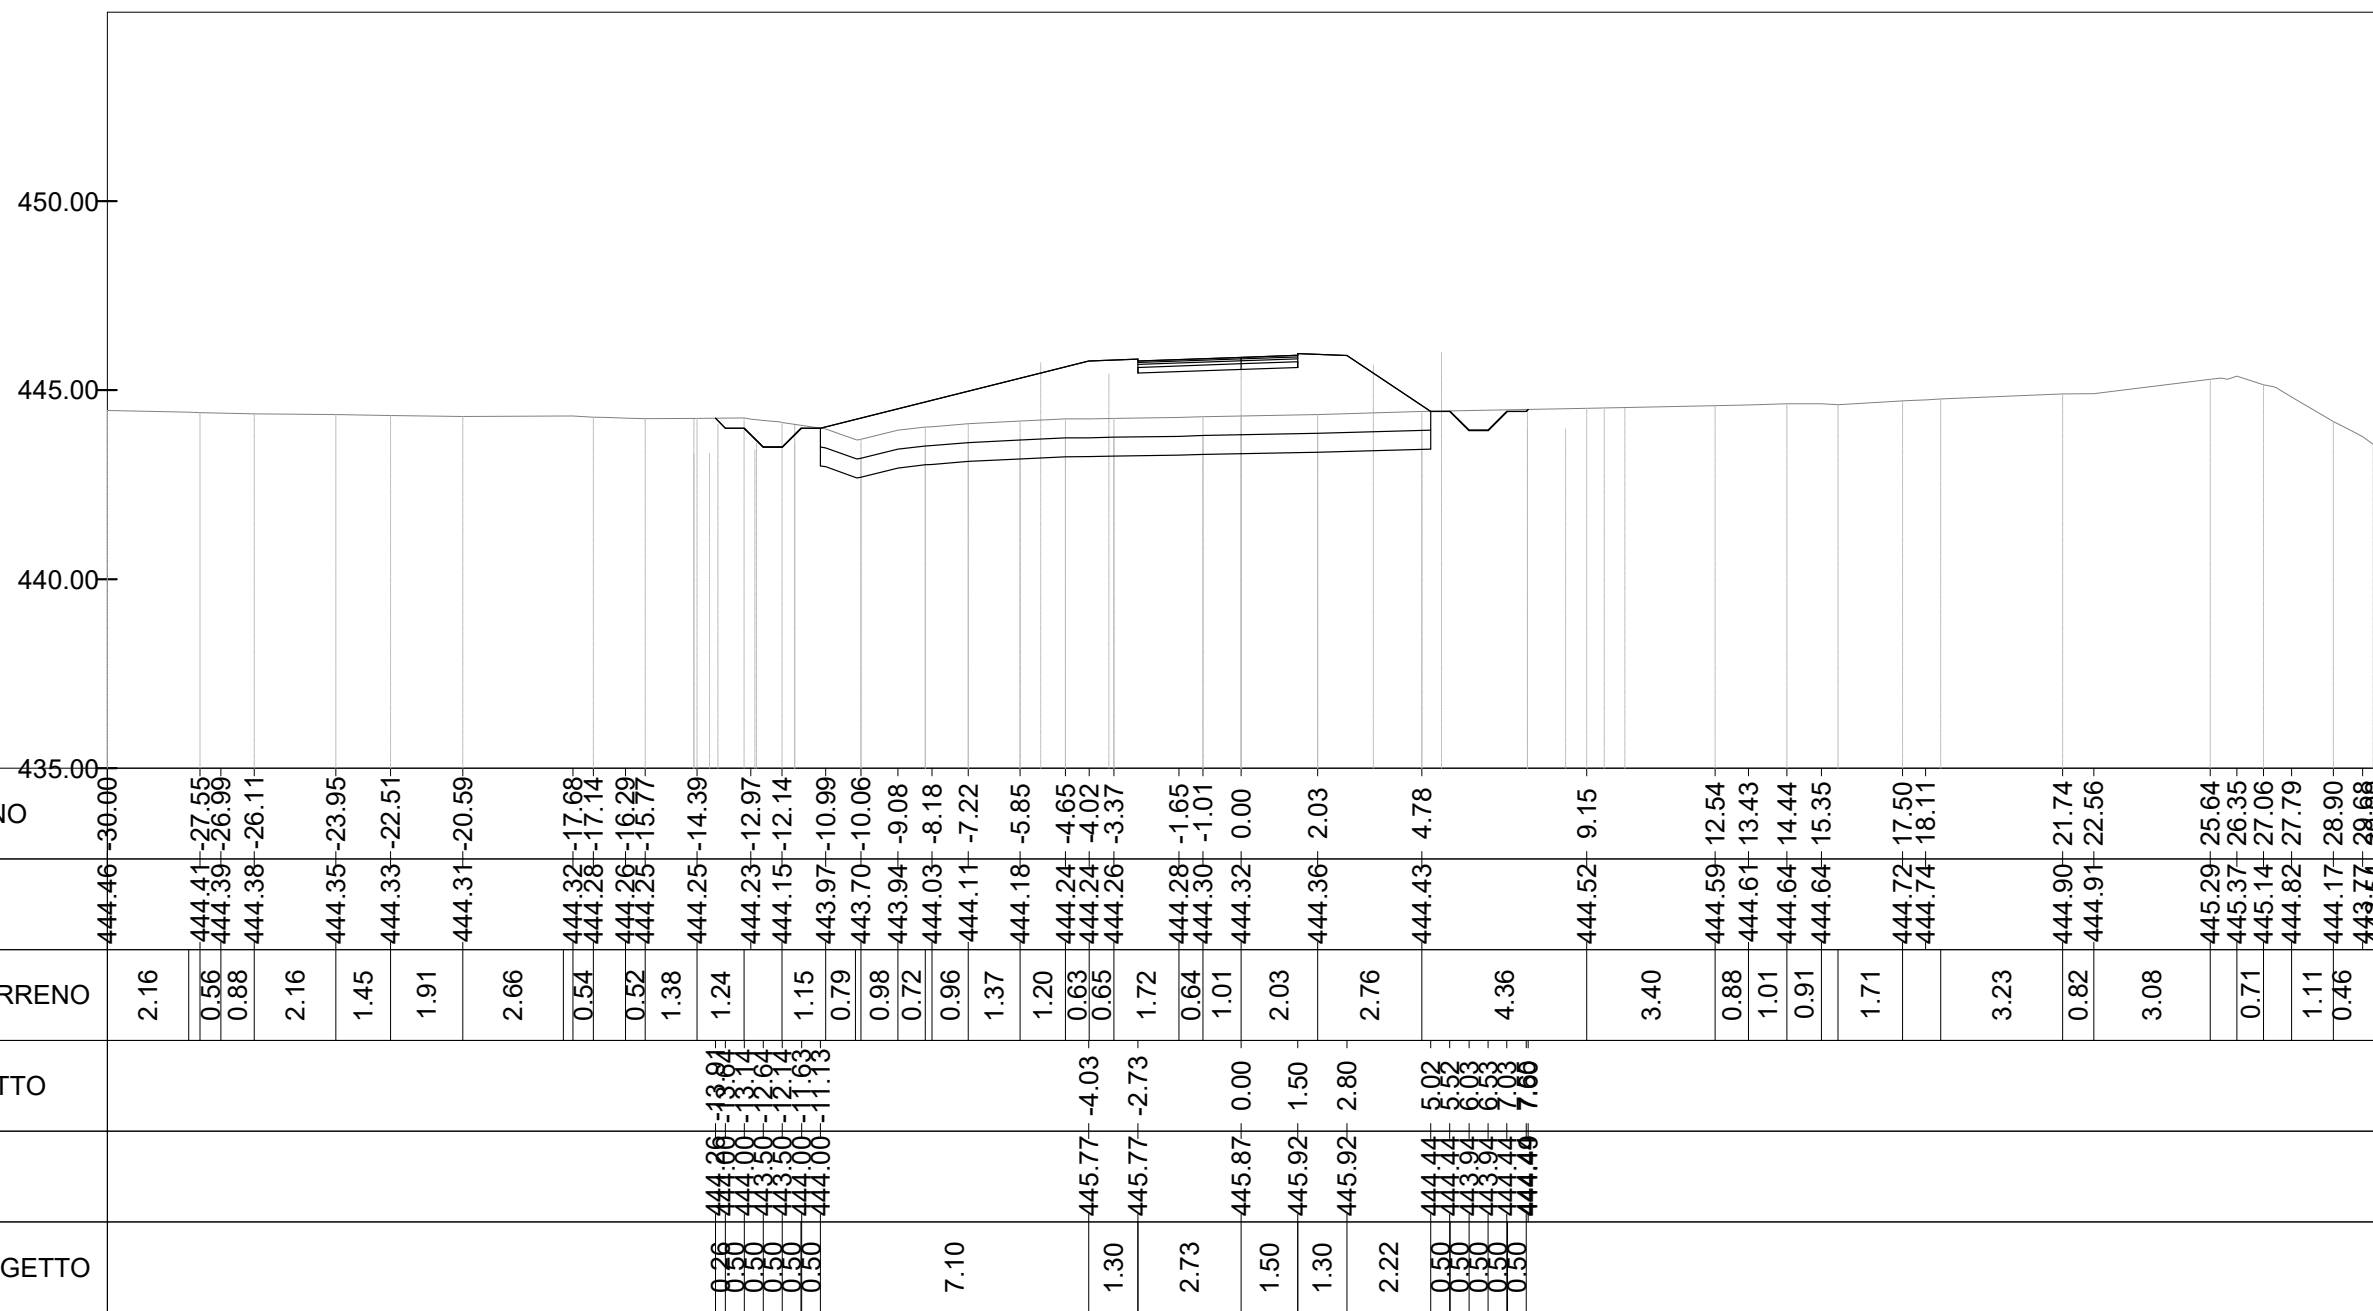

Mat. alla progr. 0+300.00


Materiale	Area (m²)	Vol. (m³)	Vol. Cum. (m³)
Scavo	1.55	67.83	393.37
Rilevato	16.89	1003.37	3325.15
Usura	0.17	11.34	80.88
Binder	0.21	14.18	101.10
Base	0.34	22.68	161.77
Fondazione	0.63	42.53	303.31
Scotico	19.71	1050.91	3169.16
Bonifica	19.71	1050.91	3169.16

ASSE NV38
SEZIONE N. 8
PROG. 350.00

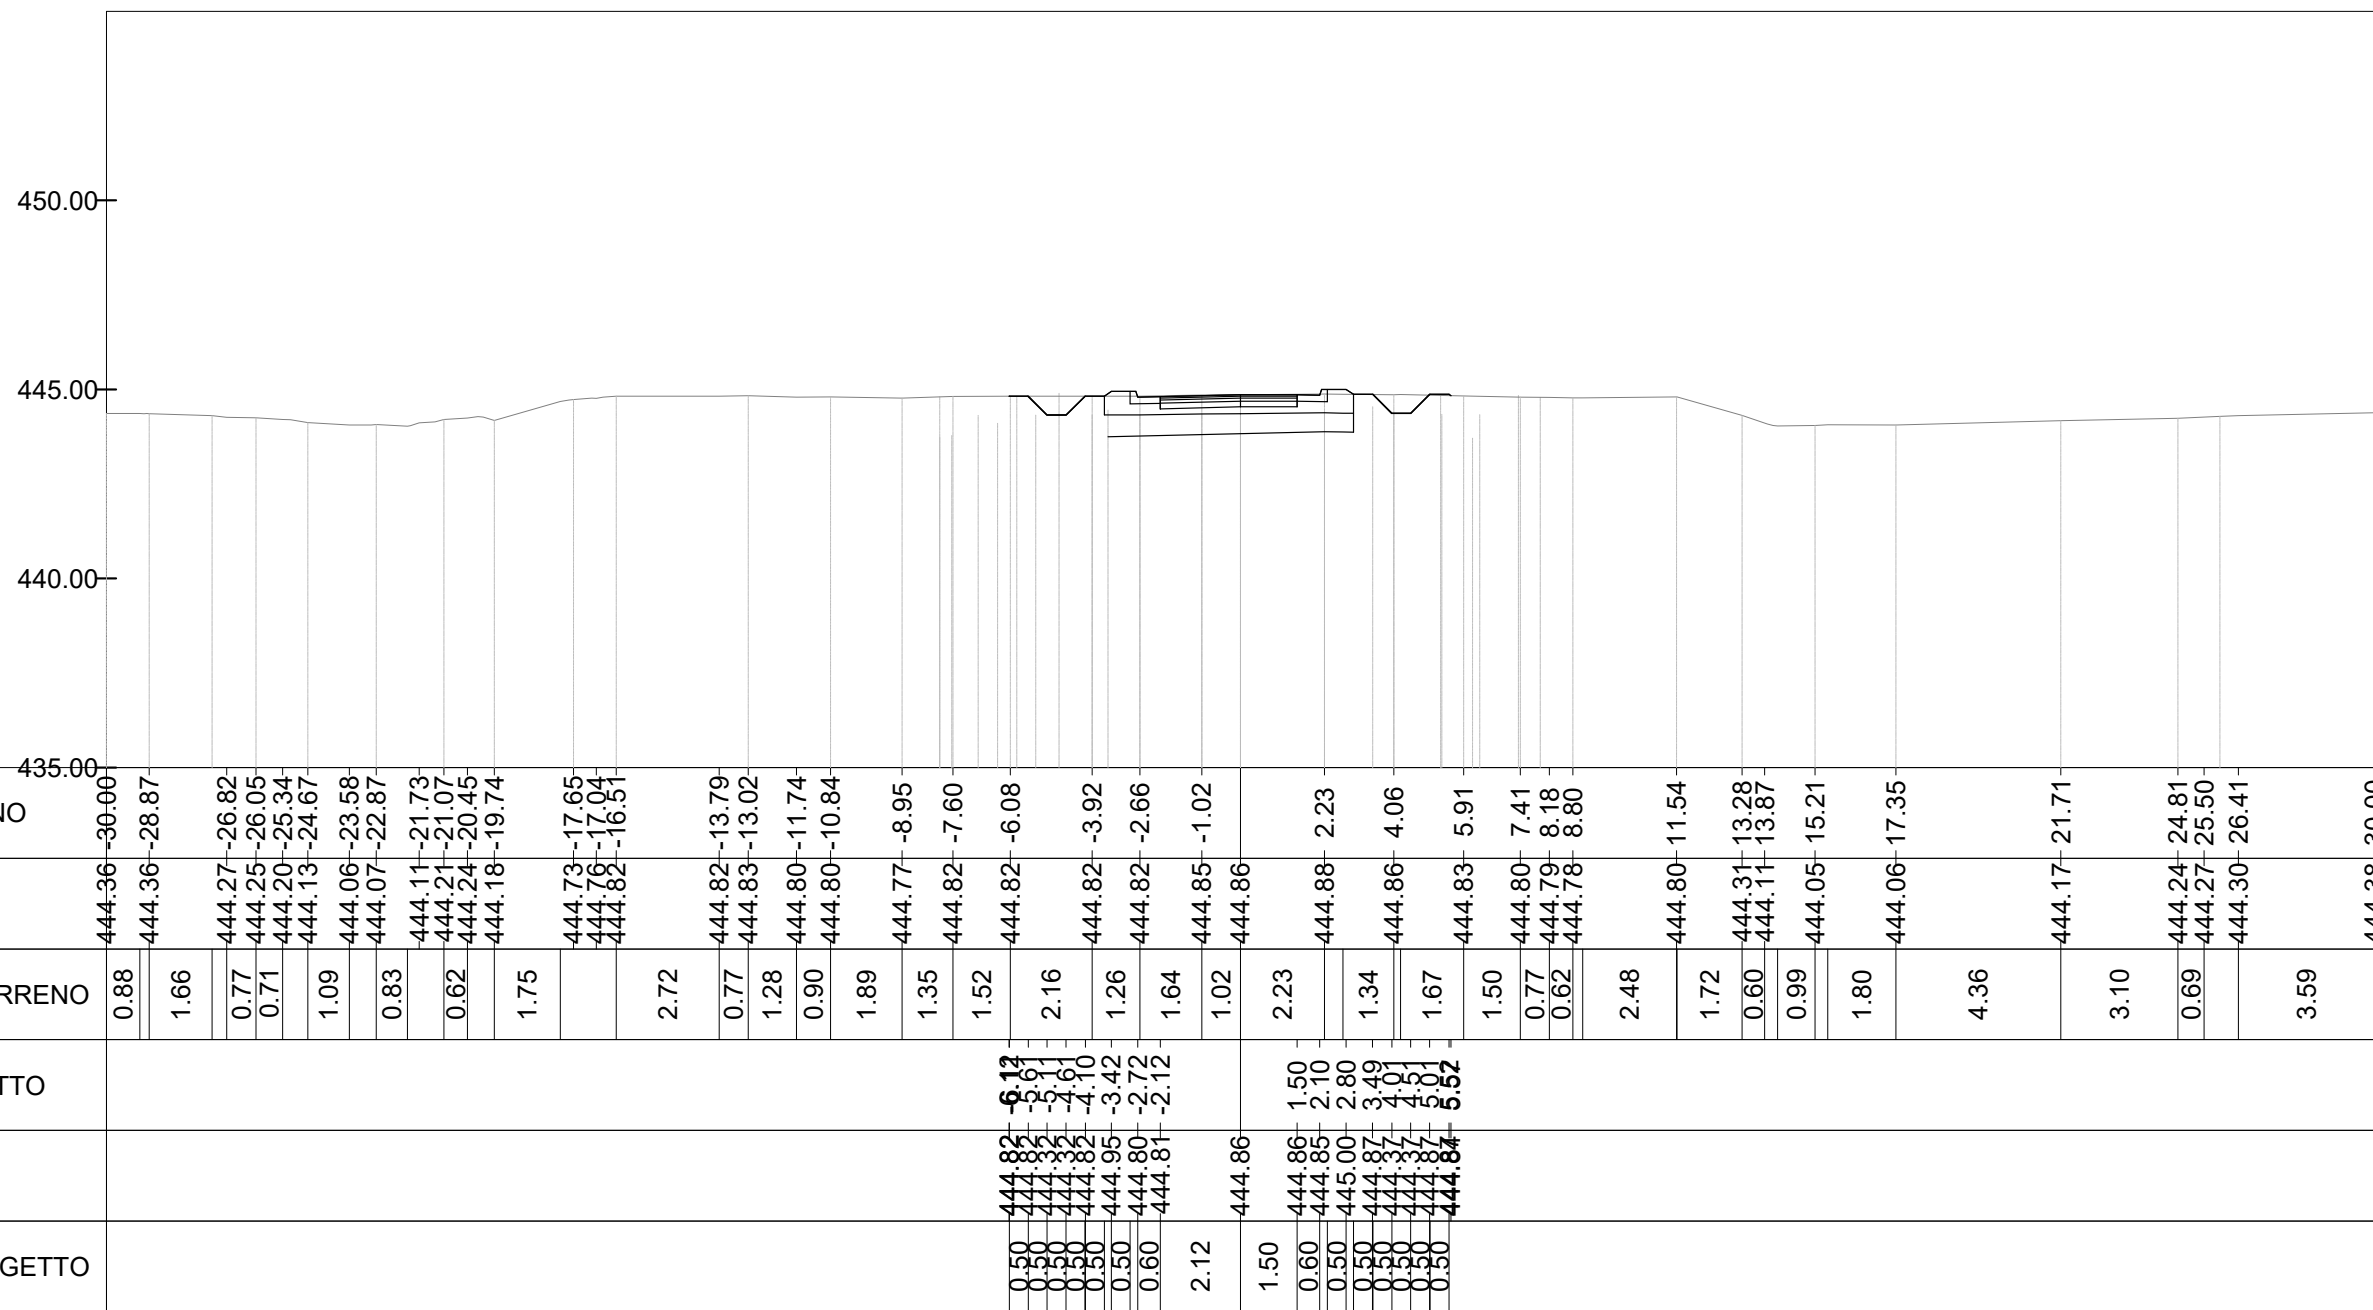

Mat. alla progr. 0+350.00			
Materiale	Area (m²)	Vol. (m³)	Vol. Cum. (m³)
Scavo	2.41	98.28	491.65
Rilevato	0.19	314.52	3639.67
Usura	0.14	7.84	88.72
Binder	0.18	9.80	110.90
Base	0.29	15.67	177.44
Fondazione	0.54	29.39	332.70
Scotico	6.14	614.32	3783.48
Bonifica	6.14	614.32	3783.48

ASSE NV38_A
 SEZIONE N. 2
 PROG. 26.61

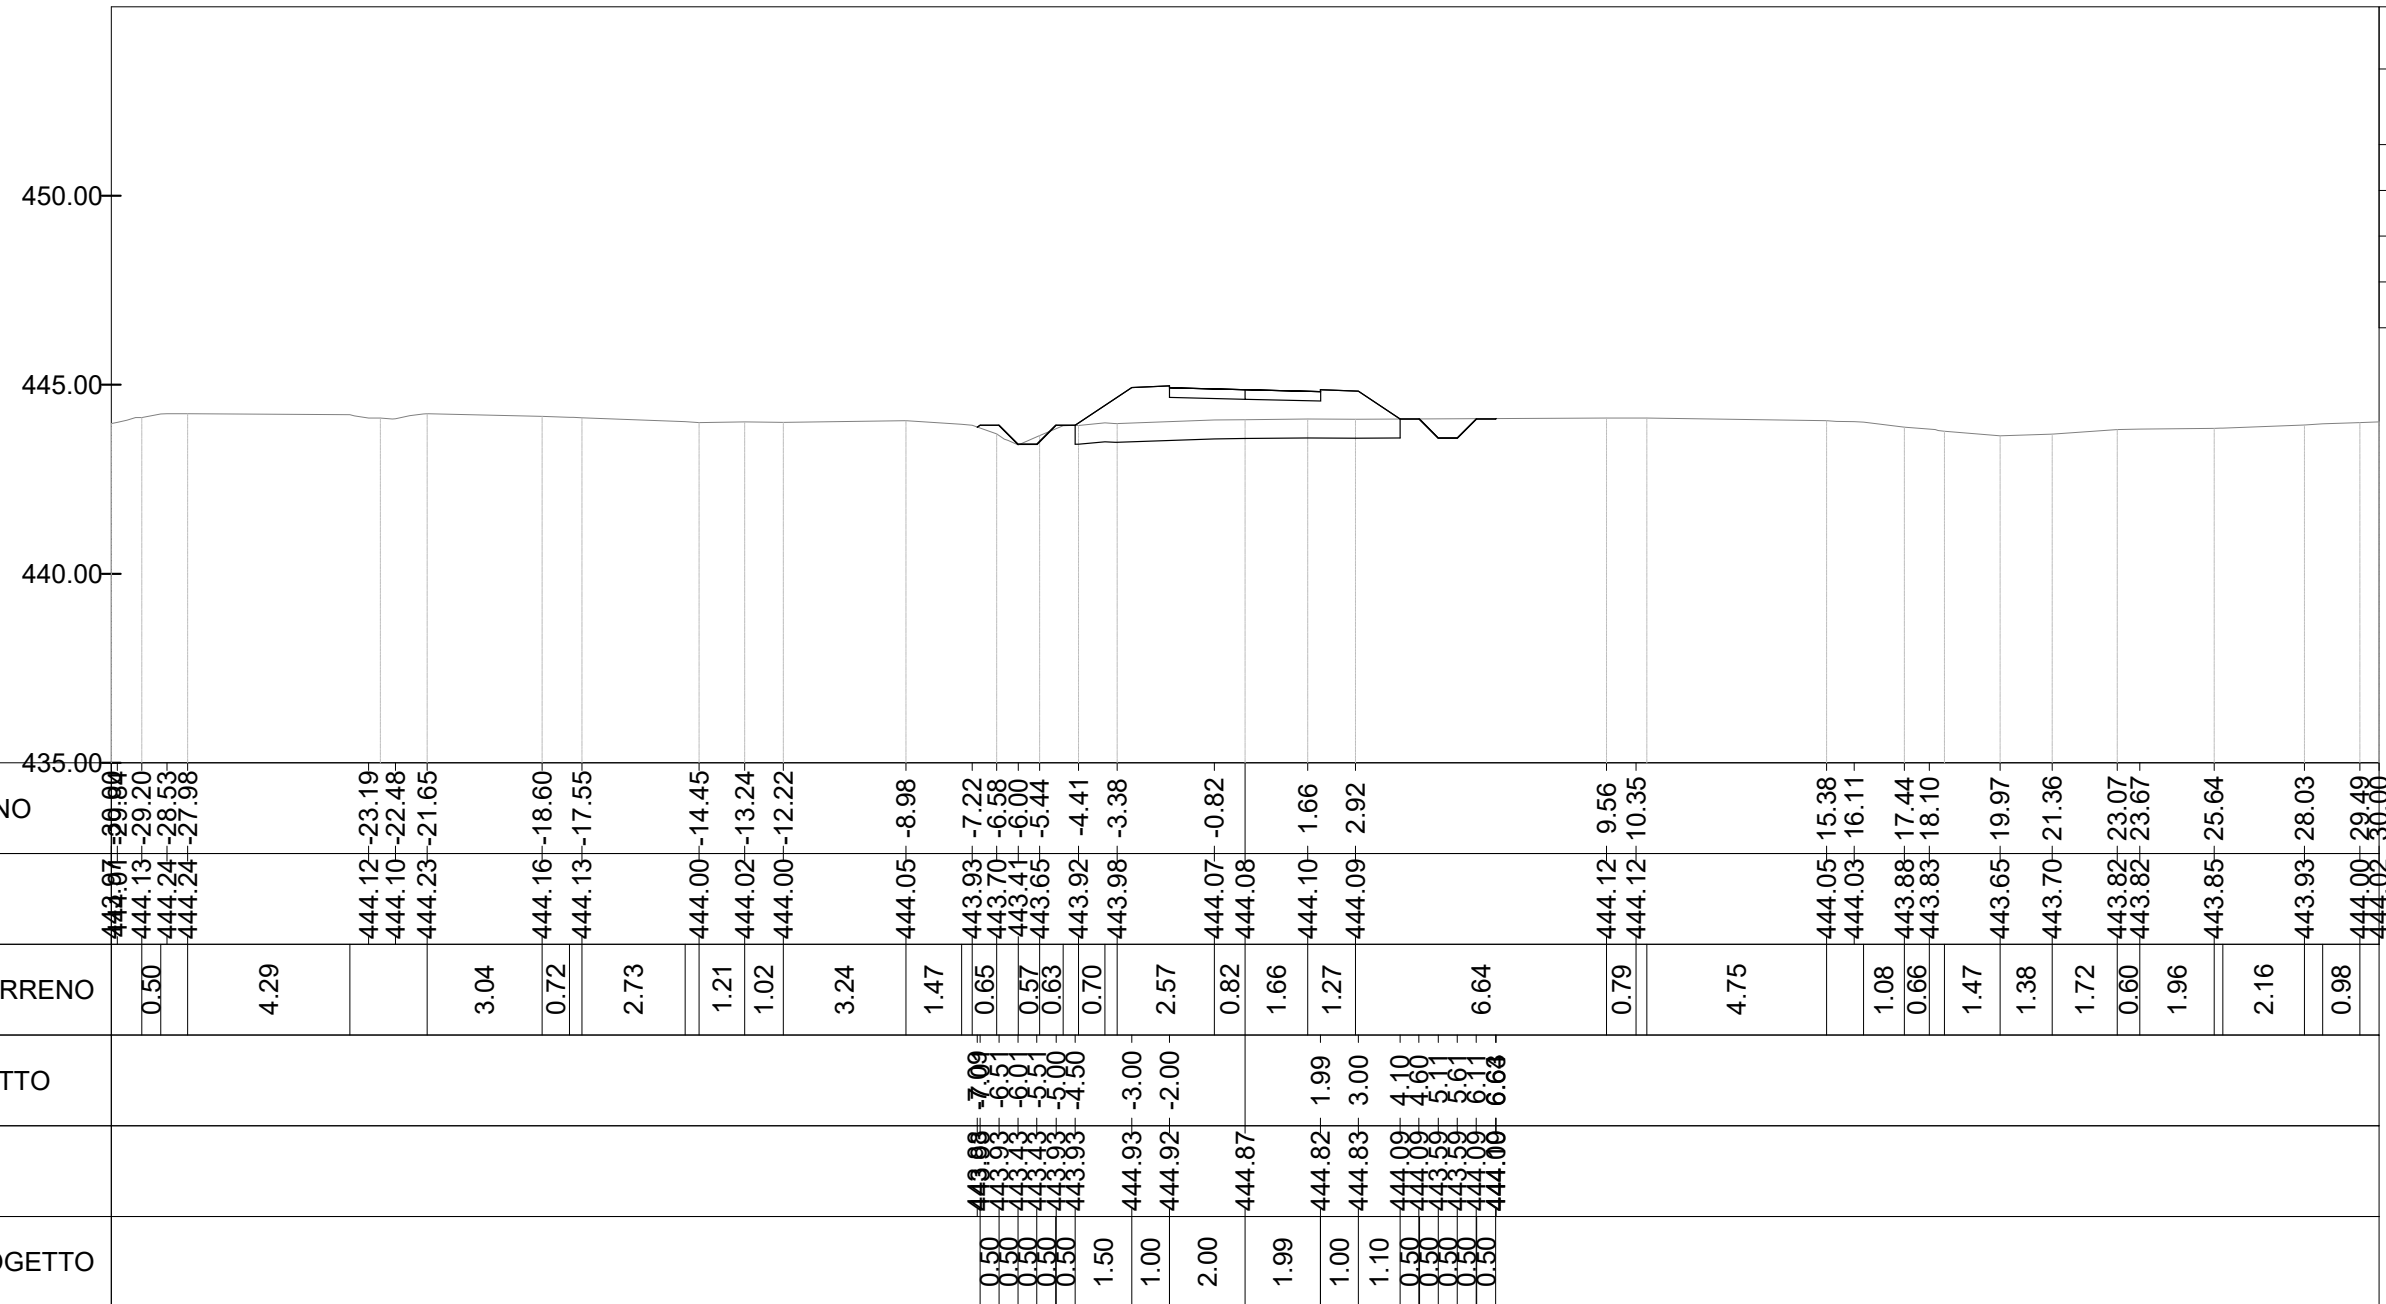

Mat. alla progr. 0+026.61			
Materiale	Area (m²)	Vol. (m³)	Vol. Cum. (m³)
Scavo	0.62	34.98	34.98
Rilevato	5.15	49.53	49.53
Usura	1.00	26.61	26.61
Scotico	4.30	94.01	94.01