

**IMPIANTO FOTOVOLTAICO
DA 25,72 MWp DC
(21,15 MW AC in immissione)
IN LOCALITÀ BERLINGHERI
REGIONE AUTONOMA DELLA SARDEGNA
COMUNI DI SILIQUA E MUSEI**

STUDIO DI IMPATTO AMBIENTALE

Elaborato:
134PRG653D_00

Marzo 2023

Datasheet Sistema di accumulo

PROPONENTE:



GREENERGY RINNOVABILI 6 S.R.L.
Via Borgonuovo, 9 - 20121 Milano
P.IVA 11892550960

REDATTORE SIA - CAPOGRUPPO:



EGERIA
ingegneria per l'ambiente

Corso V.Emanuele II, 90 Cagliari
P.Iva 03528400926
Tel. +39 328 82 88 328
info.egeria@gmail.com - www.egeriagroup.net

GRUPPO DI LAVORO: Dott. Ing. Barbara Dessì (EGERIA)
Dott.ssa Arch. Elisabetta Erika Zucca (EGERIA)
Dott. Ing. Marco A. L. Murru (Ingegnere elettrico)
Dott. Archeol. Marco Cabras (Archeologo)
Dott. Geol. Nicola Demurtas (Geologo)
Dott. Nat. Francesco Mascia (Botanico e Agrotecnico)
Dott. Nat. Maurizio Medda (Naturalista)
Dott. Agr. Vincenzo Sechi (Agronomo)



Utility Energy Storage System

ST2236UX

ST2752UX

ST3440KWH(L)-3150UD-MV

ST3727KWH(L)-3450UD-MV

ST6710KWH(L)-3150UD-MV


ST7454KWH(L)-3450UD-MV

ST3727KWH(L)-D1250HV+SG3125HV-MV

ST2236UX

Liquid Cooling Energy Storage System

Preliminary

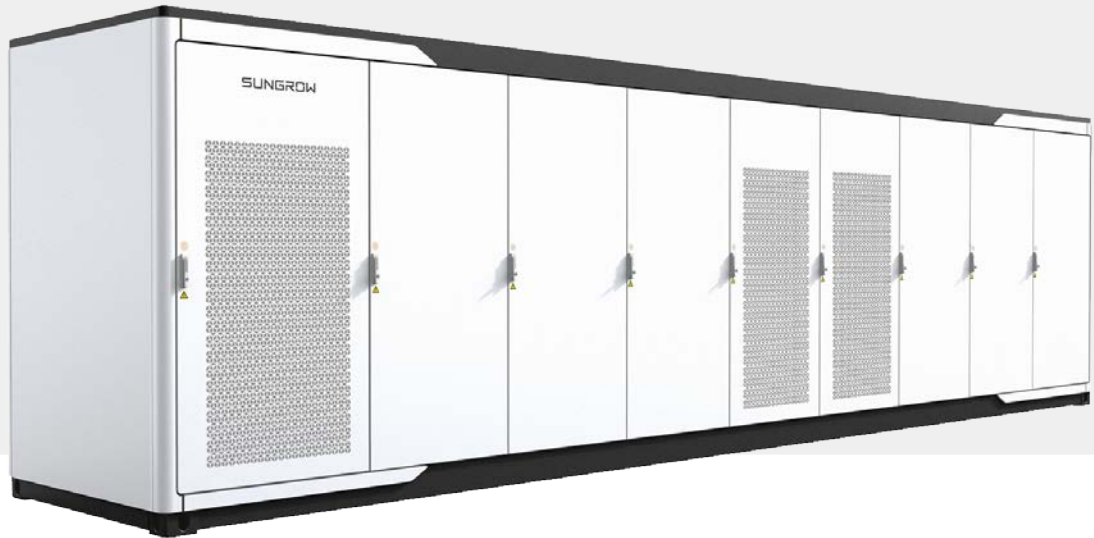

LOW COSTS

- Highly integrated ESS for easy transportation and O&M
- All pre-assembled, no battery module handling on site
- 8 hour installation to commission, drop on a pad and make electrical connections



SAFE AND RELIABLE

- DC electric circuit safety management includes fast breaking and anti-arc protection
- Multi level battery protection layers formed by discreet standalone systems offer impeccable safety



EFFICIENT AND FLEXIBLE

- Intelligent liquid cooling ensures higher efficiency and longer battery cycle life
- Modular design supports parallel connection and easy system expansion
- IP55 outdoor cabinet and optional C5 anti-corrosion



SMART AND ROBUST

- Fast state monitoring and faults record enables pre-alarm and faults location
- Integrated battery performance monitoring and logging

Type designation	ST2236UX
Battery Data	
Cell type	LFP
Battery capacity (BOL)	2236 kWh
System output voltage range	1150 – 1497 V
General Data	
Dimensions of battery unit (W * H * D)	9340*2520*1730 mm
Weight of battery unit	26,000 kg
Degree of protection	IP 55
Operating temperature range	-30 to 50 °C (> 45 °C derating)
Relative humidity	0 ~ 95 % (non-condensing)
Max. working altitude	3000m
Cooling concept of battery chamber	Liquid cooling
Fire safety standard/Optional	Deluge sprinkler heads (standard), Fused sprinkler heads (optional), NFPA69 explosion prevention and ventilation IDLH gases (optional)
Communication interfaces	RS485, Ethernet
Communication protocols	Modbus RTU, Modbus TCP
Compliance	CE, IEC 62477-1, IEC 61000-6-2, IEC61000-6-4, IEC62619
1 HOURS APPLICATION-ST2236UX*2-4000UD-MV	
BOL kWh (DC/AC LV Side)	4,472 kWh DC / 4,229 kWh AC
ST2236UX Quantity	2
PCS Model	SC4000UD-MV
Grid Connection Data	
Max.THD of current	< 3 % (at nominal power)
DC component	< 0.5 % (at nominal power)
Power factor	> 0.99 (at nominal power)
Adjustable power factor	1.0 leading – 1.0 lagging
Nominal grid frequency	50 / 60 Hz
Grid frequency range	45 – 55 Hz / 55 – 65 Hz
Transformer	
Transformer rated power	4,000 kVA
LV/MV voltage	0.8 kV / 33 kV
Transformer cooling type	ONAN (Oil Natural Air Natural)
Oil type	Mineral oil (PCB free) or degradable oil on request

SC2000UD

Power Conversion System



HIGH YIELD

- Advanced three-level technology, max. efficiency 99%
- Effective forced air cooling, no derating up to 45°C
- Wide DC voltage operation window, full power operation at 1500 V

SMART O&M

- Modular design, easy for maintenance
- IP65 protection degree, easy for outdoor installation
- C5 anti-corrosion degree, adjust to applications close to the sea


FLEXIBLE APPLICATION

- Bidirectional power conversion system with full four-quadrant operation
- Compatible with high voltage battery system, low system cost
- Battery charge & dis-charge management and black start function integrated

GRID SUPPORT

- Compliant with CE, IEC 62477, IEC 61000 and grid regulations
- Fast active/reactive power response
- L/HVRT, L/HFRT, soft start/stop, specified power factor control and reactive power support

CIRCUIT DIAGRAM

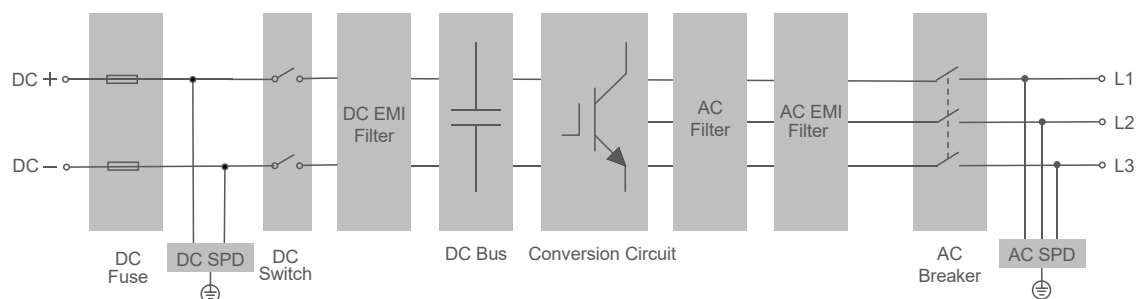

System Type	SC2000UD
DC side	
Max. DC voltage	1500 V
Min. DC voltage	1150 V
DC voltage range	1150 – 1500 V
Max. DC current	1935 A
No. of DC inputs	1
AC side (Grid)	
AC output power	2000 kVA @ 45 °C/ 2200 kVA @ 30 °C
Max. AC output current	1443 A @ 45 °C / 1587 A @ 30 °C
Nominal AC voltage	800 V
AC voltage range	704 – 880 V
Nominal grid frequency / Grid frequency range	50 Hz / 45 – 55 Hz, 60 Hz / 55 – 65 Hz
Harmonic (THD)	< 3 % (at nominal power)
Power factor at nominal power / Adjustable power factor	>0.99 / 1 leading – 1 lagging
Adjustable reactive power range	-100 % – 100 %
Feed-in phases / AC connection	3 / 3-PE
AC side (Off-Grid)	
Nominal AC voltage	800 V
AC voltage range	704 – 880 V
AC voltage Distortion	< 3 % (Linear load)
DC voltage component	< 0.5 % Un (Linear balance load)
Unbalance load Capacity	100 %
Nominal Voltage frequency / Voltage frequency range	50 Hz / 45 – 55 Hz, 60 Hz / 55 – 65 Hz
Efficiency	
Max. efficiency / European efficiency	99 % / 98.5 %
Protection	
DC input protection	Load break switch + fuse
AC output protection	Circuit breaker
Surge protection	DC Type II / AC Type II
Grid monitoring / Ground fault monitoring	Yes / Yes
Insulation monitoring	Yes
Overheat protection	Yes
General Data	
Dimensions (W*H*D)	1080*2400*1400 mm
Weight	1500 kg
Topology	Transformerless
Degree of protection	IP65
Operating ambient temperature range	-35 to 60 °C (> 45 °C derating)
Allowable relative humidity range	0 – 100 %
Cooling method	Temperature controlled forced air cooling
Max. operating altitude	4000 m (> 2000 m derating)
Display	LED, WEB HMI
Communication	RS485, CAN, Ethernet
Compliance	CE, IEC 62477-1, IEC 61000-6-2, IEC61000-6-4
Grid support	L/HVRT, L/HFRT, active & reactive power control and power ramp rate control, Volt-var, Volt-watt, Frequency-watt

SC2750UD-MV/SC3150UD-MV/ SC3450UD-MV

Power Conversion System



HIGH YIELD

- Advanced three-level technology, max. efficiency 99%
- Effective forced air cooling, no derating up to 45°C
- Wide DC voltage operation window, full power operation at 1500V



SMART O&M

- Modular design, easy for maintenance
- IP65 protection degree, easy for outdoor installation
- Optional C5 anti-corrosion degree, adjust to applications close to the sea



FLEXIBLE APPLICATION


- Bidirectional power conversion system with full four-quadrant operation
- Compatible with high voltage battery system, low system cost
- Battery charge & dis-charge management and black start function integrated



GRID SUPPORT

- Compliant with CE, IEC 62477, IEC 61000 and grid regulations
- Fast active/reactive power response
- L/HVRT, L/HFRT, soft start/stop, specified power factor control and reactive power support

CIRCUIT DIAGRAM

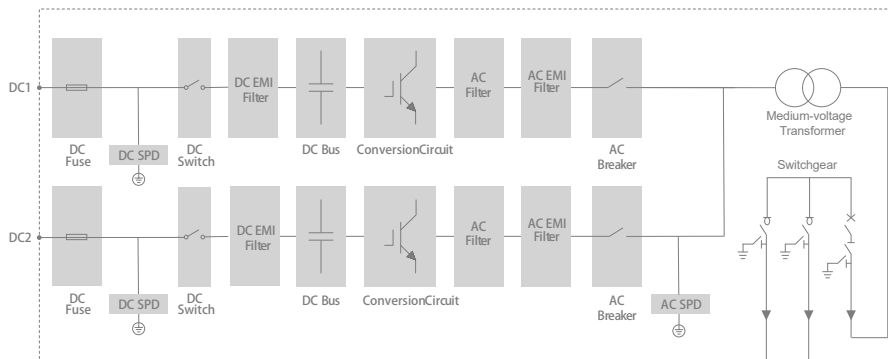

System Type	SC2750UD-MV	SC3150UD-MV	SC3450UD-MV
DC side			
Max. DC voltage		1500 V	
Min. DC voltage	800 V	915 V	1000 V
DC voltage range	800 – 1500 V	915 – 1500 V	1000 – 1500 V
Max. DC current		1935 A * 2	
No. of DC inputs		2	
AC side (Grid)			
AC output power	2750 kVA @ 45 °C 3025 kVA @ 30 °C	3150 kVA @ 45 °C 3465 kVA @ 30 °C	3450 kVA @ 45 °C 3795 kVA @ 30 °C
Max. AC output current		3174 A	
Nominal AC voltage	550 V	630 V	690 V
AC voltage range	484 – 605 V	554 – 693 V	607 – 759 V
Nominal grid frequency / Grid frequency range		50 Hz / 45 – 55 Hz, 60 Hz / 55 – 65 Hz	
Harmonic (THD)		< 3 % (at nominal power)	
Power factor at nominal power / Adjustable power factor		>0.99 / 1 leading – 1 lagging	
Adjustable reactive power range		-100 % – 100 %	
Feed-in phases / AC connection		3 / 3-PE	
AC side (Off-Grid)			
Inverter port nominal AC voltage	550 V	630 V	690 V
Inverter port AC voltage range	484 – 605 V	554 – 693 V	607 – 759 V
AC voltage distortion		< 3 % (Linear load)	
DC voltage component		< 0.5 % Un (Linear balance load)	
Unbalance load capacity		100%	
Nominal Voltage frequency / Voltage frequency range		50 Hz / 45 – 55 Hz, 60 Hz / 55 – 65 Hz	
Efficiency			
Inverter Max. efficiency		99.0 %	
Transformer			
Transformer rated power	2750 kVA	3150 kVA	3450 kVA
Transformer max. power	3025 kVA	3465 kVA	3795 kVA
LV / MV voltage	0.55 kV / (20 – 35) kV	0.63 kV / (20 – 35) kV	0.69 kV / (20 – 35) kV
Transformer vector		Dy11	
Transformer cooling type		ONAN	
Oil type		Mineral oil (PCB free) or degradable oil on request	
Protection			
DC input protection		Load break switch + fuse	
Inverter output protection		Circuit breaker	
AC output protection		Circuit breaker	
Surge protection		DC Type II / AC Type II	
Grid monitoring / Ground fault monitoring		Yes / Yes	
Insulation monitoring		Yes	
Overheat protection		Yes	
General Data			
Dimensions (W*H*D)		6058*2896*2438 mm	
Weight		16000 kg	
Degree of protection		IP54 (Inverter: IP65)	
Operating ambient temperature range		-35 to 60 °C (> 45 °C derating)	
Allowable relative humidity range		0 – 100 %	
Cooling method		Temperature controlled forced air cooling	
Max. operating altitude		1000 m (Standard) / > 1000 m (Optional)	
Display		LED, WEB HMI	
Communication		RS485, CAN, Ethernet	
Compliance		CE, IEC 62477-1, IEC 61000-6-2, IEC61000-6-4	
Grid support		L/HVRT, L/HFRT, active & reactive power control and power ramp rate control, Volt-var, Volt-watt, Frequency-watt	