

Regione
Veneto



Provincia di
Rovigo



Comune di
Guarda Veneta



IMPIANTO AGROVOLTAICO DI 70MW CON STORAGE 30MW/120MWh SITO NEL COMUNE DI GUARDA VENETA (RO) E RELATIVE OPERE CONNESSE

PROGETTISTA INCARICATO:
Ing. Riccardo Clementi
Pec: riccardo.clementi@ingpec.eu



Scala

Titolo elaborato:

Formato

A4

DATASHEET
COMPONENTI

TECNICI COINVOLTI

Ing. Riccardo Clementi
Arch. Emiliano Manzato
Dott. Agr. Stefano Pesavento
Dott. Geol. Loris Tietto

CODICE ELABORATO

PROGETTO	CLASSE	TIPO	PROG.
RVFVVE02	VIA 2	R	29

Rev.	Data	Descrizione	Redige	Verifica	Approva
00	04/23	PRIMA EMISSIONE	GR	GR	RC
01					
02					
03					
04					
05					
06					

GESTORE RETE ELETTRICA



SOCIETA' PROPONENTE:

Guarda Veneta SRL
Via Mike Bongiorno, 13 - 20124 Milano
PEC: guardaveneta@pec-legal.it
REA: MI - 2677345
P.iva 05496450288

SOCIETA' di PROGETTAZIONE:

Renvalue SRL
Via Quattro Novembre, 2 Padova
PEC: cert@pec.renvalue.it




Gamesa Electric Proteus PV Stations

Larger MV solution for LCoE reduction




Compact
and modular
design

TDHI <1%

One-way
efficiency
99.45%

Outdoor
solution

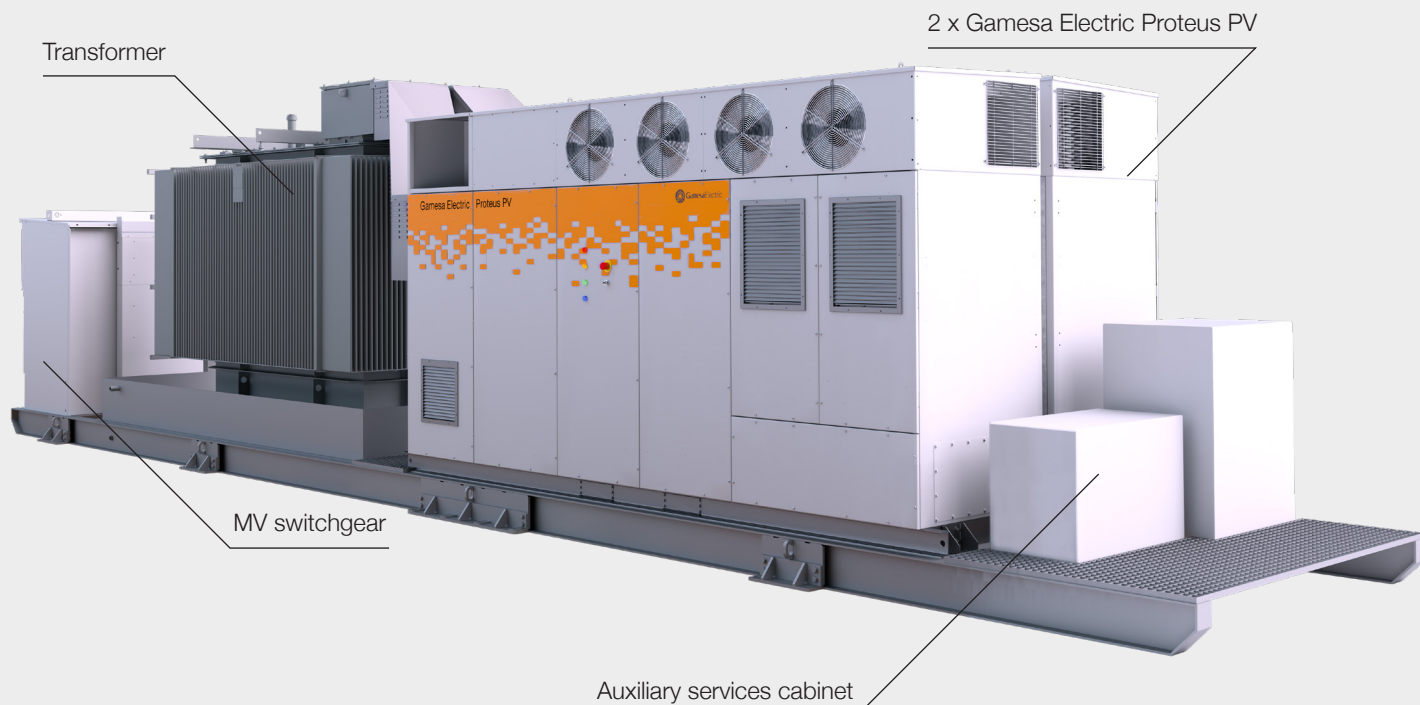

Gamesa Electric Proteus PV Station



Better LCoE

Largest single inverter
power block in the market
with 4,700 KVA

Fewer inverters per project
thus lower Capex and Opex

DC/AC ratio of up to 200%



Higher yield

Market-leading efficiency
with 99.45%

THDi < 1% which reduces
losses

Enhanced temperature
derating: keeping full power
up to 40°C [104°F]



Built to last


Designed and manufactured
for a 30 year life span

CoolBrid: Smart hybrid
cooling system that allows
critical components to work
far below the temperature
limit


Lowest THDi in the market
helps to extend power
transformers lifespan

1 x Gamesa Electric Proteus PV Inverter Configurations

Gamesa Electric Proteus PV Station				
Number of Gamesa Electric Proteus PV Inverters	1 x Proteus PV 4100	1 x Proteus PV 4300	1 x Proteus PV 4500	1 x Proteus PV 4700
DC Connection				
DC Voltage Range ⁽¹⁾	835 - 1500 V	875 - 1500 V	915 - 1500 V	955 - 1500 V
DC Voltage Range MPPT ⁽¹⁾	835 - 1300 V	875 - 1300 V	915 - 1300 V	955 - 1300 V
Number of Power Modules	2, not galvanically isolated, 1 MPPT			
Max. DC Current @40°C [104°F]	2 x 2500 A			
Max. DC Current @50°C [122°F]	2 x 2313 A			
Max. DC Current @55°C [131°F]	2 x 2220 A			
Max. DC Current @60°C [140°F]	2 x 1110 A			
Number of DC Ports ⁽¹⁾	max 24 fuse +/- monitored max 36 fuse + monitored			
AC Connection				
Number of Phases	Three-phase			
Nominal AC Power Total @40°C [104°F]	4095 kVA	4299 kVA	4504 kVA	4709 kVA
Nominal AC Power Total @50°C [122°F]	3790 kVA	3979 kVA	4169 kVA	4358 kVA
Nominal AC Power Total @55°C [131°F]	3637 kVA	3819 kVA	4001 kVA	4183 kVA
Nominal AC Power Total @60°C [140°F]	1819 kVA	1910 kVA	2001 kVA	2091 kVA
Maximum AC Current @40°C [104°F]	3940 Arms			
Nominal AC Voltage, LV side ⁽¹⁾	600 Vrms	630 Vrms	660 Vrms	690 Vrms
Nominal AC Voltage, MV side ⁽¹⁾	< 34.5 kV			
Nominal Voltage Allowance Range ⁽¹⁾	+/-10%			
Frequency Range ⁽¹⁾	47.5 - 53 / 57 - 63 Hz			
THD of AC Current	< 1% @Sn			
Power Factor Range	0 (inductive)-1-0 (capacitive)			
Protection devices				
DC Connection	Motorized disconnectors, Overvoltage protection (Type 1 + 2 SPD), reverse polarity detection, DC ground fault and insulation detection			
AC Connection	Motorized AC circuit breakers, Overvoltage protection (Type 1 + 2 SPD), Anti-islanding, Voltage failure, Frequency failure			
Over-temperature Protection	Included			
Emergency Push Button	Included			
Components Proteus PV Station				
Inverters	1 x Proteus PV 4100	1 x Proteus PV 4300	1 x Proteus PV 4500	1 x Proteus PV 4700
Transformer ⁽¹⁾⁽⁶⁾	Dyn KNAN / ONAN			
Switchgear ⁽¹⁾⁽⁶⁾	0L1V / 1L1V / 2L1V up to 36 kV			
Custom Auxiliary Transformer ⁽¹⁾	Optional			
Others ⁽¹⁾	Auxilliary cabinet			
Communications				
Control ⁽¹⁾	Modbus TCP / IP			
Monitoring ⁽¹⁾	Modbus TCP / IP			
Webserver	Included			

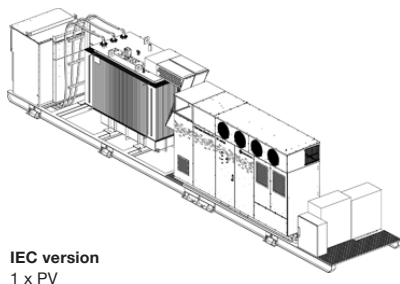

IEC version
1 x PV




UL version
1 x PV

Other Features			
LVRT		Yes	
HVRT		Yes	
Temperature Range - Operation ⁽²⁾		-20°C / +60°C[-4°F/+140°F], Option -30°C[-22°F]	
Relative Humidity		4% - 100% (without condensation)	
Maximum Altitude (without derating) ⁽³⁾		2,000 m[6561 ft]	
Dimensions W x H x D(IEC / UL version) ⁽⁴⁾		11800 x 2600 x 2100 mm / 30 x 8.5 x 8.6 ft	
Protection		IP54	
Cooling System		Liquid & forced air	
Standards/Directives ⁽⁵⁾			
IEC 62109-1	IEC 62920	IEC 60529	NEC 2020
IEC 62109-2	EN 50530	IEC 61727	CEA 2007
IEC 61000-6-2/4	IEC 62116	NTS 631 v1.1 SENP, v2.1 SEPE	Rule 14, Rule 21
IEEE 1547	IEC 61683	UL 1741-SA	PRC 024
EN 55011	IEEE 519	CSA C22.2	UL 62109-1

Optionals
Low Temperature Kit up to -30 °C [-22°F]
Enhanced corrosion protection
Motorized MV Switchgear
UPS
Custom Auxiliary Transformer
Seismic Reinforcement

2 x Gamesa Electric Proteus PV Inverters Configurations

Gamesa Electric Proteus PV Station				
Number of Gamesa Electric Proteus PV Inverters	2 x Proteus PV 4100	2 x Proteus PV 4300	2 x Proteus PV 4500	2 x Proteus PV 4700
DC Connection				
DC Voltage Range ⁽¹⁾	835 - 1500 V	875 - 1500 V	915 - 1500 V	955 - 1500 V
DC Voltage Range MPPT ⁽¹⁾	835 - 1300 V	875 - 1300 V	915 - 1300 V	955 - 1300 V
Number of Power Modules	4, 2 independent MPPT			
Max. DC Current @40°C [104°F]	4 x 2500 A			
Max. DC Current @50°C [122°F]	4 x 2313 A			
Max. DC Current @55°C [131°F]	4 x 2220 A			
Max. DC Current @60°C [140°F]	4 x 1110 A			
Number of DC Ports ⁽¹⁾	max 48 fuse +/- monitored max 72 fuse + monitored			
AC Connection				
Number of Phases	Three-phase			
Nominal AC Power Total @40°C [104°F]	8190 kVA	8598 kVA	9008 kVA	9418 kVA
Nominal AC Power Total @50°C [122°F]	7580 kVA	7958 kVA	8338 kVA	8716 kVA
Nominal AC Power Total @55°C [131°F]	7274 kVA	7638 kVA	8002 kVA	8366 kVA
Nominal AC Power Total @60°C [140°F]	3638 kVA	3820 kVA	4002 kVA	4182 kVA
Maximum AC Current @40°C [104°F]	3940 Arms / 2 x 3940 Arms			
Nominal AC Voltage, LV side ⁽¹⁾	2 x 600 Vrms	2 x 630 Vrms	2 x 660 Vrms	2 x 690 Vrms
Nominal AC Voltage, MV side ⁽¹⁾	< 34.5 kV			
Nominal Voltage Allowance Range ⁽¹⁾	+/-10%			
Frequency Range ⁽¹⁾	47.5 - 53 / 57 - 63 Hz			
THD of AC Current	< 1% @Sn			
Power Factor Range	0 (inductive)-1-0 (capacitive)			
Protection devices				
DC Connection	Motorized disconnectors, Overvoltage protection (Type 1 + 2 SPD), reverse polarity detection, DC ground fault and insulation detection			
AC Connection	Motorized AC circuit breakers, Overvoltage protection (Type 1 + 2 SPD), Anti-islanding, Voltage failure, Frequency failure			
Over-temperature Protection	Included			
Emergency Push Button	Included			
Components Proteus PV Station				
Inverters	2 x Proteus PV 4100	2 x Proteus PV 4300	2 x Proteus PV 4500	2 x Proteus PV 4700
Transformer ⁽¹⁾⁽⁶⁾	Dyn KNAN / ONAN			
Switchgear ⁽¹⁾⁽⁶⁾	0L1V / 1L1V / 2L1V up to 36 kV			
Custom Auxiliary Transformer ⁽¹⁾	Optional			
Others ⁽¹⁾	Auxilliary cabinet			
Communications				
Control ⁽¹⁾	Modbus TCP / IP			
Monitoring ⁽¹⁾	Modbus TCP / IP			
Webserver	Included			

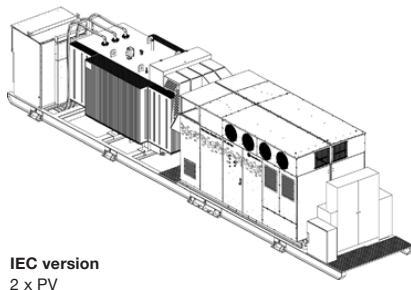

IEC version
2 x PV

Other Features				Optionals
LVRT		Yes		Low Temperature Kit up to -30 °C [-22°F]
HVRT		Yes		Enhanced corrosion protection
Temperature Range - Operation ⁽²⁾		-20°C / +60°C[-4°F/+140°F], Option -30°C[-22°F]		Motorized MV Switchgear
Relative Humidity		4% - 100% (without condensation)		UPS
Maximum Altitude (without derating) ⁽³⁾		2,000 m[6561 ft]		Custom Auxiliary Transformer
Dimensions W x H x D(IEC / UL version) ⁽⁴⁾		11800 x 2600 x 2100 mm / 30 x 8.5 x 8.6 ft		Seismic Reinforcement
Protection		IP54		
Cooling System		Liquid & forced air		
Standards/Directives ⁽⁶⁾				⁽¹⁾ Consult Gamesa Electric for a specific configuration
IEC 62109-1	IEC 62920	IEC 60529	NEC 2020	⁽²⁾ With derating from 40°C [104°F]
IEC 62109-2	EN 50530	IEC 61727	CEA 2007	⁽³⁾ Up to 4,000m [13,123 ft] with derating as optional
IEC 61000-6-2/4	IEC 62116	NTS 631 v1.1 SENP, v2.1 SEPE	Rule 14, Rule 21	⁽⁴⁾ UL variant only available for 1-PV Inverter based configuration
IEEE 1547	IEC 61683	UL 1741-SA	PRC 024	⁽⁵⁾ Consult Gamesa Electric for other Standards/Directives
EN 55011	IEEE 519	CSA C22.2	UL 62109-1	⁽⁶⁾ UL version: Padmounted Dyn (without external switchgear)

⁽¹⁾ Consult Gamesa Electric for a specific configuration

⁽²⁾ With derating from 40°C [104°F]

⁽³⁾ Up to 4,000m [13,123 ft] with derating as optional

⁽⁴⁾ UL variant only available for 1-PV Inverter based configuration

⁽⁵⁾ Consult Gamesa Electric for other Standards/Directives

⁽⁶⁾ UL version: Padmounted Dyn (without external switchgear)



GamesaElectric

Shaping New Energy




+5 GW
SOLAR ENERGY



+127 GW
WIND POWER



+90
COUNTRIES

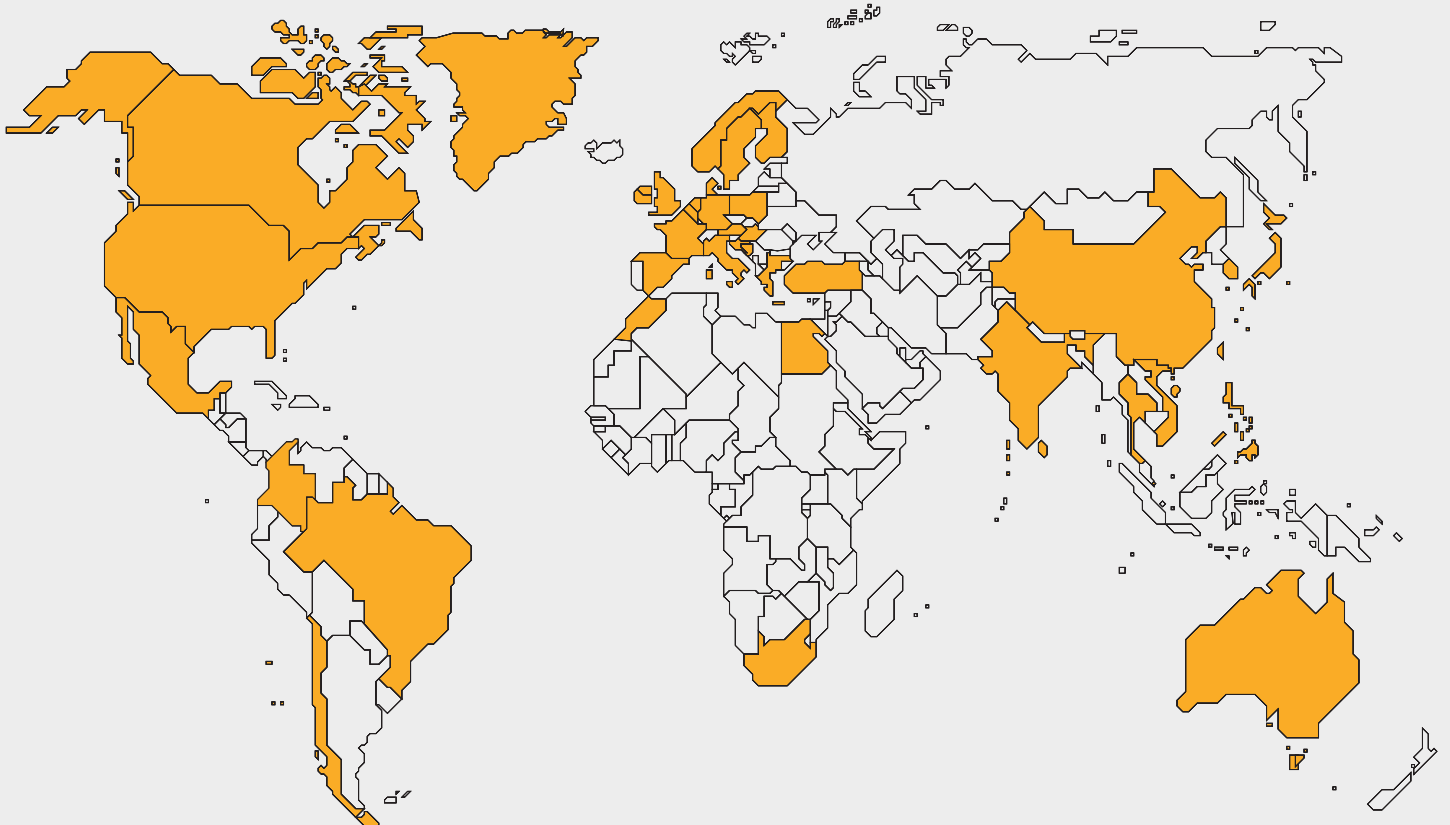

**Worldwide
presence**

Australia
Austria
Belgium
Brazil
Canadá
Thailand

Chile
China
Croatia
Denmark
Egypt
Turkey

France
Germany
Greece
Hong Kong
Hungary
UK

India
Ireland
Italy
Japan
Korea
USA

Mexico
Morocco
Netherlands
Norway
Philippines
Colombia

Poland
Singapore
South Africa
Sri Lanka
Sweden

Bosnia and
herzegovina



gamesaelectric@gamesacorp.com
www.gamesaelectric.com

In order to minimize the environmental impact, this document has been printed on paper made from 50% pure cellulose fiber (ECF), 40% selected pre-consumer recycled fiber, and 10% post-consumer deinked recycled fiber inks based exclusively on vegetable oils with a minimum volatile organic compound (VOC) content. Varnish based predominantly on natural and renewable raw materials.

The present document, its content, its annexes and/or amendments has been drawn up by Siemens Gamesa Renewable Energy for information purposes only and could be modified without prior notice. All the content of the Document is protected by intellectual and industrial property rights owned by Siemens Gamesa Renewable Energy. The addressee shall not reproduce any of the information, neither totally nor partially.

January 2023

210 THIN WAFERS HJT BIFACIAL MODULE

22.5%
Maximum
Efficiency

132 cells
HJT Bifacial
Module

675-700Wp
Power Output
Range

1500VDC
Maximum System
Voltage

ULTRA-LOW CARBON


RSM132-8-675-700BHDG

KEY SALIENT FEATURES:

-  Global, Tier 1 bankable brand, with independently certified state-of-the-art automated manufacturing
-  N-type solar cell without LID caused by B-O
-  No PID
-  Better Temperature Coefficient
-  Bifacial technology enables additional energy harvesting from rear side
-  Positive power tolerance of 0~+3%

-  Dual stage 100% EL Inspection warranting defect-free product
-  Module Imp binning radically reduces string mismatch losses
-  Excellent wind load 2400Pa & snow load 5400Pa under certain installation method
-  Comprehensive product and system certification
 - ♦ IEC61215:2016; IEC61730-1/-2:2016;
 - ♦ ISO 9001:2015 Quality Management System
 - ♦ ISO 14001:2015 Environmental Management System
 - ♦ ISO 45001:2018 Occupational Health and Safety Management System

LINEAR PERFORMANCE WARRANTY

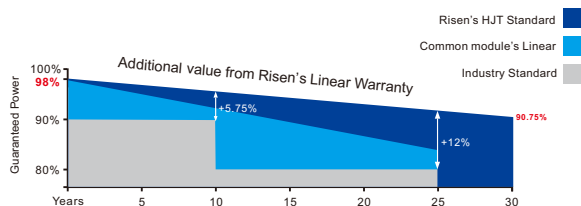


★ Please check the valid version of Limited Product Warranty which is officially released by Risen Energy Co., Ltd

-  Product Warranty
-  Linear Power Warranty
-  Annual Degradation over 30 years


Dimensions of PV Module

Unit: mm

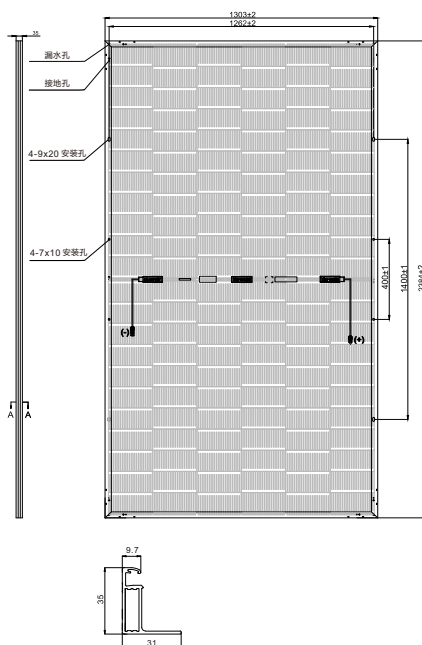


RSM132-8-690BHDG

I-V characteristics at different irradiances

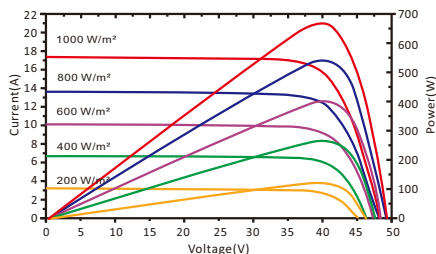

I-V characteristics at different temperatures

(AM1.5, 1000W/m²)

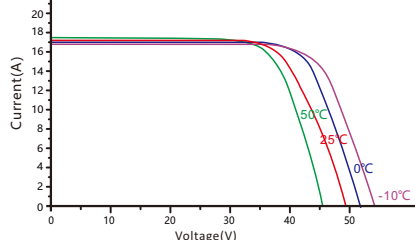

ELECTRICAL DATA (STC)

Model Number	RSM132-8-675BHDG	RSM132-8-680BHDG	RSM132-8-685BHDG	RSM132-8-690BHDG	RSM132-8-695BHDG	RSM132-8-700BHDG
Rated Power in Watts-Pmax(Wp)	675	680	685	690	695	700
Open Circuit Voltage-Voc(V)	49.38	49.47	49.56	49.65	49.74	49.83
Short Circuit Current-Isc(A)	17.40	17.48	17.56	17.66	17.74	17.82
Maximum Power Voltage-Vmpp(V)	41.41	41.48	41.56	41.63	41.71	41.78
Maximum Power Current-Impp(A)	16.32	16.41	16.50	16.60	16.68	16.77
Module Efficiency (%) ★	21.7	21.9	22.1	22.2	22.4	22.5

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.
Bifacial factor:(%) 85±5 ★ Module Efficiency (%): Round-off to the nearest number

Electrical characteristics with 10% rear side power gain

Total Equivalent power -Pmax (Wp)	743	748	754	759	765	770
Open Circuit Voltage-Voc(V)	49.38	49.47	49.56	49.65	49.74	49.83
Short Circuit Current-Isc(A)	19.14	19.23	19.32	19.43	19.51	19.60
Maximum Power Voltage-Vmpp(V)	41.41	41.48	41.56	41.63	41.71	41.78
Maximum Power Current-Impp(A)	17.95	18.05	18.15	18.26	18.35	18.44

Rear side power gain: The additional gain from the rear side compared to the power of the front side at the standard test condition. It depends on mounting (structure, height, tilt angle etc.) and albedo of the ground.

ELECTRICAL DATA (NMOT)

Model Number	RSM132-8-675BHDG	RSM132-8-680BHDG	RSM132-8-685BHDG	RSM132-8-690BHDG	RSM132-8-695BHDG	RSM132-8-700BHDG
Maximum Power-Pmax (Wp)	515.6	519.3	523.0	527.2	530.9	534.5
Open Circuit Voltage-Voc (V)	46.27	46.35	46.44	46.52	46.61	46.69
Short Circuit Current-Isc (A)	14.27	14.34	14.40	14.48	14.55	14.61
Maximum Power Voltage-Vmpp (V)	38.71	38.78	38.85	38.93	39.00	39.07
Maximum Power Current-Impp (A)	13.32	13.39	13.46	13.54	13.61	13.68

NMOT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s.

MECHANICAL DATA

Solar cells	HJT cell
Cell configuration	132 cells (6×11+6×11)
Module dimensions	2384×1303×35mm
Weight	38.5kg
Superstrate	High Transmission, Low Iron, Tempered ARC Glass
Substrate	Tempered Glass
Frame	Anodized Aluminium Alloy type 6005-2T6, Silver Color
J-Box	Potted, IP68, 1500VDC, TÜV&UL Certified
Cables	4.0mm² (12AWG), Positive(+)350mm, Negative(-)230mm (Connector Included)
Connector	Risen Twinsel PV-SY02, IP68

TEMPERATURE & MAXIMUM RATINGS

Nominal Module Operating Temperature (NMOT)	43°C±2°C
Temperature Coefficient of Voc	-0.22%/°C
Temperature Coefficient of Isc	0.047%/°C
Temperature Coefficient of Pmax	-0.24%/°C
Operational Temperature	-40°C~+85°C
Maximum System Voltage	1500VDC
Max Series Fuse Rating	35A
Limiting Reverse Current	35A

PACKAGING CONFIGURATION

	40ft(HQ)
Number of modules per container	558
Number of modules per pallet	31
Number of pallets per container	18
Packaging box dimensions (LxWxH) in mm	1320×1120×2515
Box gross weight[kg]	1245

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.

©2022 Risen Energy. All rights reserved. Contents included in this datasheet are subject to change without notice.


No special undertaking or warranty for the suitability of special purpose or being installed in extraordinary surroundings is granted unless as otherwise specifically committed by manufacturer in contract document.

THE POWER OF RISING VALUE

Our Partners:

Mittelspannungskabel mit VPE-Isolierung

Medium voltage cables with XLPE Insulation

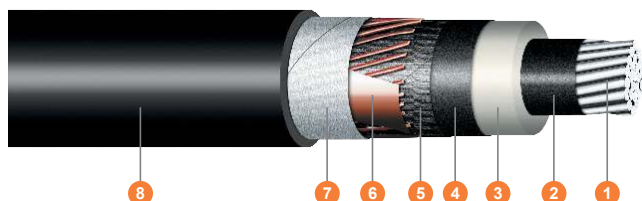

Standard: in Anlehnung an DIN VDE 0276-620
following DIN VDE 0276-620

Aufbau:

Design:

- | | | | |
|---|---|---|-------------------------------------|
| 1 Aluminiumleiter
Aluminium conductor | 3 VPE-Isolierung
XLPE insulation | 5 Bandierung
Tape | 7 Quellvlies
Water-blocking tape |
| 2 Innere Leitschicht
Inner semi-conducting layer | 4 Äußere Leitschicht
Outer semi-conducting layer | 6 Kupferdrahtschirm aus
Kupferdrähten und
Kupferband
Copper wire screen and
copper tape | 8 PE-Mantel
PE outer sheath |

Anwendung:

Application:

Die Kabel sind geeignet für die feste Verlegung in Innenräumen, im Freien und in Erde. Sie können direkt in den Boden oder in Kabelkanäle gelegt werden.

The cables are suitable for installation indoors, outdoors and in the ground. Installation to be carried out in the ground or in a cable channel.

Eigenschaften:

Properties:

Nennspannung Rated voltage	20.8/36 kV	Mindesttemperatur für die Verlegung Minimal temperature for laying	-20°C
Prüfspannung Test voltage	73 kV	Farbe der Isolierung Colour of insulation	ungefärbt uncoloured
Maximale Betriebstemperatur des Leiters Maximal operating conductor temperature	+90°C	Farbe des Mantels Colour of sheath	schwarz black
Maximale Betriebstemperatur beim Kurzschluss Maximal short-circuit temperature	+250°C	Flammwidrigkeit Flame retardant	nein no
Betriebstemperatur Operating temperature range	-35°C - +90°C	Verpackung Packaging	Holz- oder Metalltrommeln wooden or metal drums
Mindesttemperatur für die Lagerung Minimal storage temperature	-35°C	CE-Konformität CE-Conformity	ja yes

Technische Daten:

Technical details:

Aderzahl und Nennquerschnitt	Leiterform	Durchmesser des Leiters (ca.)	Nennwanddicke der Isolierung	Durchmesser über Isolation (ca.)	Nennwanddicke des Mantels	Außendurch- messer (ca.)	Biegeradius (min.)	Gewicht (ca.)
Number of cores and cross-section	Shape of conductor	Conductor diameter (approx.)	Nominal insulation thickness	Diameter over insulation (approx.)	Nominal sheath thickness	Outer diameter (approx.)	Bending radius (min.)	Weight (approx.)
mm ²		mm	mm	mm	mm	mm	mm	kg/km
1x50/16	RM	8.3	8.8	27.1	2.5	35	525	1074
1x70/16	RM	9.8	8.8	28.6	2.5	37	555	1181
1x95/16	RM	11.3	8.8	30.1	2.5	38	570	1307
1x120/16	RM	12.8	8.8	31.6	2.5	40	600	1430
1x150/25	RM	14.2	8.8	33.0	2.5	41	615	1634
1x185/25	RM	15.8	8.8	34.6	2.5	43	645	1802
1x240/25	RM	18.1	8.8	36.9	2.5	45	675	2038
1x300/25	RM	20.2	8.8	39.0	2.6	48	720	2294
1x400/35	RM	23.3	8.8	42.1	2.6	51	765	2808
1x500/35	RM	26.5	8.8	45.3	2.7	54	810	3235
1x630/35	RM	29.9	8.8	48.7	2.8	58	870	3763
1x800/35	RM	34.2	8.8	53.0	2.9	62	930	4439

Die Angaben dienen lediglich der Information und stellen keine Zusicherung oder rechtsverbindliche Erklärung dar. Vertragliche Verpflichtungen entstehen erst mit Abschluss eines schriftlichen Vertrages unter ausdrücklicher Benennung der geltenden Vertragsinhalte. Eine Haftung für die Richtigkeit der übermittelten Informationen ist ausgeschlossen. Die Weitergabe an Dritte oder Veröffentlichung ist untersagt. Urheber- und gewerbliche Schutzrechte bleiben bei nkt cables und sind geschützt.

This data was prepared for informational purposes only and does not contain any representations, legally binding declarations or guarantees. Contractual obligations shall only come into effect after a written contract, detailing the terms and conditions, has been signed. A liability of nkt cables for the correctness of the information contained herein is excluded. The data shall not be handed out to third parties or disclosed in public documents. Any intellectual property rights remain with nkt cables and are reserved.

Elektrische Eigenschaften:

Electrical properties:

Aderzahl und Nennquerschnitt <i>Number of cores and cross-section</i>	Gleichstrom- widerstand bei 20°C <i>DC resistance at 20°C</i>	Kapazität (ca.) <i>Capacitance (approx.)</i>	Induktivität, Dreieck (ca.) <i>Inductance, trefoil (approx.)</i>	Induktivität in Erde, flach (ca.) ¹ <i>Inductance in ground, flat (approx.) ¹</i>
mm ²	Ω/km	µF/km	mH/km	mH/km
1x50/16	0.6410	0.13	0.48	0.73
1x70/16	0.4430	0.14	0.45	0.70
1x95/16	0.3200	0.15	0.44	0.67
1x120/16	0.2530	0.16	0.42	0.65
1x150/25	0.2060	0.17	0.40	0.62
1x185/25	0.1640	0.19	0.39	0.60
1x240/25	0.1250	0.20	0.37	0.58
1x300/25	0.1000	0.22	0.36	0.56
1x400/35	0.0778	0.25	0.35	0.53
1x500/35	0.0605	0.27	0.33	0.51
1x630/35	0.0469	0.30	0.31	0.49
1x800/35	0.0367	0.33	0.30	0.47

Anmerkung: ¹) Lichter Abstand zwischen den Kabeln: 7 cm
 Remarks: ¹) clearance between cables: 7 cm

Die Angaben dienen lediglich der Information und stellen keine Zusicherung oder rechtsverbindliche Erklärung dar. Vertragliche Verpflichtungen entstehen erst mit Abschluss eines schriftlichen Vertrages unter ausdrücklicher Benennung der geltenden Vertragsinhalte. Eine Haftung für die Richtigkeit der übermittelten Informationen ist ausgeschlossen. Die Weitergabe an Dritte oder Veröffentlichung ist untersagt. Urheber- und gewerbliche Schutzrechte bleiben bei nkt cables und sind geschützt.

This data was prepared for informational purposes only and does not contain any representations, legally binding declarations or guarantees. Contractual obligations shall only come into effect after a written contract, detailing the terms and conditions, has been signed. A liability of nkt cables for the correctness of the information contained herein is excluded. The data shall not be handed out to third parties or disclosed in public documents. Any intellectual property rights remain with nkt cables and are reserved.

Aderzahl und Nennquerschnitt <i>Number of cores and cross-section</i>	Zulässiger Kurzschluss- strom, Leiter <i>Conductor short- circuit current</i>	Zulässiger Kurzschluss- strom, Schirm <i>Screen short- circuit current</i>	Erwärmungszeit- konstante, Dreieck* <i>Heating time constant, trefoil*</i>	Erwärmungszeit- konstante, flach* <i>Heating time constant, flat*</i>	Belastbarkeit an Luft, Dreieck* <i>Current ratings in air, trefoil*</i>	Belastbarkeit an Luft, flach* <i>Current ratings in air, flat*</i>	Belastbarkeit in Erde, Dreieck* <i>Current ratings in ground, trefoil*</i>	Belastbarkeit in Erde, flach* <i>Current ratings in ground, flat*</i>
mm ²	kA	kA	s	s	A	A	A	A
1x50/16	4.7	3.2	264	204	194	221	179	193
1x70/16	6.6	3.2	336	260	241	274	219	235
1x95/16	9.0	3.2	425	330	291	330	261	282
1x120/16	11.3	3.2	511	400	335	378	298	320
1x150/25	14.2	5.0	632	509	376	419	331	350
1x185/25	17.5	5.0	737	599	430	477	373	393
1x240/25	22.7	5.0	901	748	504	553	432	449
1x300/25	28.4	5.0	1086	913	574	626	485	500
1x400/35	37.8	7.0	1464	1305	659	698	547	542
1x500/35	47.3	7.0	1740	1608	756	786	617	592
1x630/35	59.6	7.0	2105	2000	866	889	690	653
1x800/35	75.6	7.0	2631	2588	984	992	770	723

Anmerkungen: *)

Die Strombelastbarkeitswerte basieren auf folgenden Bedingungen:

- Legung berührend im Dreieck oder flach mit 70 mm lichtem Abstand
- ein System mit Legetiefe 0,7 m
- beidseitige Erdung der Schirme
- Bodentemperatur 20°C
- spezifischer Bodenwärmewiderstand:
 - 1,0 K·m/W für feuchten Boden
 - 2,5 K·m/W für trockenen Boden
- keine zusätzlichen beeinflussenden Wärmequellen
- Lufttemperatur 30°C
- keine direkte Sonnenbestrahlung

Remarks: *)

The values of current-carrying capacity are based on following conditions:

- touching trefoil or flat formation with 70 mm clearance
- one circuit at 0.7 m laying depth
- solid bonding of cable screens
- ground temperature 20°C
- soil thermal resistivity:
 - 1.0 K·m/W for wet soil
 - 2.5 K·m/W for dry soil
- no additional heat sources
- air temperature 30°C
- no exposure to direct solar radiation

Die Angaben dienen lediglich der Information und stellen keine Zusicherung oder rechtsverbindliche Erklärung dar. Vertragliche Verpflichtungen entstehen erst mit Abschluss eines schriftlichen Vertrages unter ausdrücklicher Benennung der geltenden Vertragsinhalte. Eine Haftung für die Richtigkeit der übermittelten Informationen ist ausgeschlossen. Die Weitergabe an Dritte oder Veröffentlichung ist untersagt. Urheber- und gewerbliche Schutzrechte bleiben bei nkt cables und sind geschützt.

This data was prepared for informational purposes only and does not contain any representations, legally binding declarations or guarantees. Contractual obligations shall only come into effect after a written contract, detailing the terms and conditions, has been signed. A liability of nkt cables for the correctness of the information contained herein is excluded. The data shall not be handed out to third parties or disclosed in public documents. Any intellectual property rights remain with nkt cables and are reserved.

PHYSICAL AND ELECTRICAL CHARACTERISTICS


Alcobre code	Cross Section nc x mm²	Nominal overall diameter mm	Nominal weight kg/km	Minimum bending radius mm	Max. current rating		Voltage drop Cos φ= 0,8 V/A.km
					Air 30 °C A	Buried 20 °C A	
16203001	1x25	10,7	148	40	135	96	2,235
16204001	1x35	11,8	186	45	169	115	1,639
16205001	1x50	12,8	229	50	207	135	1,234
16206001	1x70	15,0	316	60	268	167	0,876
16207001	1x95	16,7	402	65	328	197	0,654
16208001	1x120	18,3	484	75	383	223	0,534
16209001	1x150	20,2	593	80	444	251	0,449
16210001	1x185	22,5	747	90	510	281	0,373
16211001	1x240	25,2	941	130	607	324	0,303
16212001	1x300	27,7	1.217	140	703	365	0,257
16212501	1x400	31,6	1.567	160	823	----	0,217

- on the Air the current rating is in according to IEC 60364-5-52 table B.52.12, installation method E.
- Buried the current rating is in according to IEC 60364-5-52, table B.52.5, installation method D1.


Combine the Freemaq PCSK & Multi PCSK with our MV solutions.

MV Skid Compact & Twin Skid Compact

From low to medium voltage

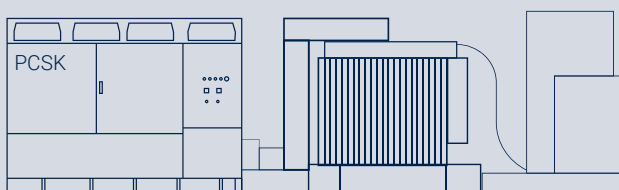

MV SKID COMPACT

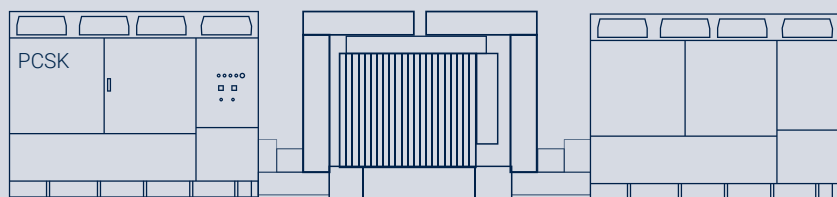

TWIN SKID COMPACT

MV Skid Compact

RATINGS	Power range @ 40 °C	1910 kVA - 4390 kVA
	Power range @ 50 °C	1775 kVA - 4075 kVA
MEDIUM VOLTAGE EQUIPMENT	MV voltage range	6.6 kV / 11 kV / 13.2 kV / 13.8 kV / 15 kV / 20 kV / 22 kV / 23 kV / 25 kV / 30 kV / 33 kV / 34.5 kV
	LV voltage range	480 V / 500 V / 530 V / 600 V / 615 V / 630 V / 645 V / 660 V / 690 V
	Transformer cooling	ONAN
	Transformer vector group	Dy11
	Transformer protection	Protection relay for pressure, temperature (two levels) and gassing
		Monitoring of dielectric level decrease
		PT100 optional.
	Transformer index of protection	IP54
	Transformer losses	IEC standard or IEC Tier-2
	Oil retention tank	Galvanized steel. Integrated with hydrocarbon filter. Optional
	Switchgear configuration	Double feeder (2L)
	Switchgear protection	Circuit breaker (V)
	Switchgear short circuit rating ^[1]	16 kA 1 s (optionally 20 kA or 25 kA)
	Switchgear IAC ^[1]	A FLR 16 kA 1 s
CONNECTIONS	LV-MV connections	Close coupled solution (plug & play)
	LV protection	Motorized circuit breaker included in the inverter
	HV AC wiring	MV bridge between transformer and protection switchgear prewired
ENVIRONMENT	Ambient temperature range ^[2]	-25 °C... +50 °C (T > 50 °C power derating)
	Maximum altitude (above sea level) ^[1]	Up to 1000 m
	Relative humidity	4% to 95% non condensing
AUXILIARY SERVICES	User cabinet	Integrated in the inverter (by default). Optionally, LV cabinet in the skid.
	UPS system ^[1]	1 kVA/1 kW (12 minutes). Optional
OTHER EQUIPMENT	Safety mechanism	Interlocking system
	Fire suppression system	Transformer oil tank retention accessory. Optional.
STANDARDS	Compliance	IEC 62271-212, IEC 62271-200, IEC 60076, IEC 61439-1

NOTES

[1] Consult with Power Electronics for other options.

[2] For lower temperatures, consult with Power Electronics.

Twin Skid Compact

RATINGS	Power range @ 40 °C	3820 kVA - 8780 kVA
	Power range @ 50 °C	3550 kVA - 8150 KVA
MEDIUM VOLTAGE EQUIPMENT	MV voltage range	11 kV / 13.2 kV/ 13.8 kV/ 15 kV / 20 kV / 22 kV / 23 kV / 25 kV / 30 kV / 33 kV / 34.5 kV
	LV voltage range	480 V / 500 V / 530 V/ 600 V /615 V / 630 V / 645 V / 660 V / 690 V
	Transformer cooling	ONAN
	Transformer vector group	Dy11y11
	Transformer protection	Protection relay for pressure, temperature (two levels) and gassing.
		Monitoring of dielectric level decrease.
		PT100 optional.
	Transformer index of protection	IP54
	Transformer losses	IEC standard or IEC Tier-2.
	Oil retention tank	Galvanized steel. Integrated with hydrocarbon filter. Optional
	Switchgear configuration	Double feeder (2L)
	Switchgear protection	Circuit breaker (V)
	Switchgear short circuit rating ^[1]	16 kA 1 s (optionally 20 kA or 25 kA)
	Switchgear IAC ^[1]	A FLR 16 kA 1 s
CONNECTIONS	LV-MV connections	Close coupled solution (plug & play)
	LV protection	Motorized circuit breaker included in the inverter
	HV AC wiring	MV bridge between transformer and protection switchgear prewired
ENVIRONMENT	Ambient temperature range ^[2]	-25 °C... +50 °C (T > 50 °C power derating)
	Maximum altitude (above sea level) ^[1]	Up to 1000 m
	Relative humidity	4% to 95% non condensing
AUXILIARY SERVICES	User cabinet	Integrated in the inverter (by default). Optionally, LV cabinet in the skid.
	UPS system ^[1]	1 kVA/1 kW (12 minutes). Optional
OTHER EQUIPMENT	Safety mechanism	Interlocking system
	Fire suppression system	Transformer oil tank retention accessory. Optional.
STANDARDS	Compliance	IEC 62271-212, IEC 62271-200, IEC 60076, IEC 61439-1


NOTES

[1] Consult with Power Electronics for other options.

[2] For lower temperatures, consult with Power Electronics.

Golden Sigma

Outdoor Air-Cooling Cabinet BESS

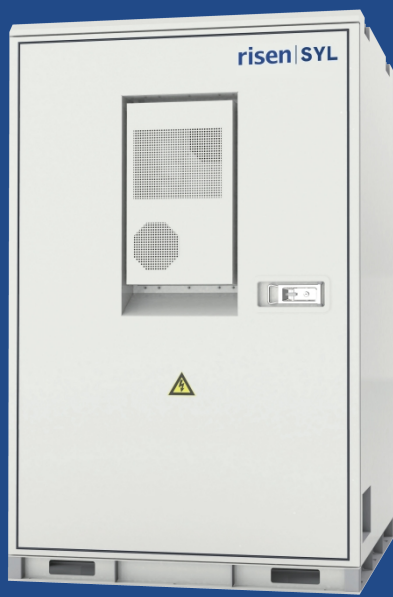

SU340U85K/SU340U170K

System Controller



Short Circuit Protection



Rack Level Lockable Disconnect



Water-based suppression System



Intrusion Detect System




Fire Detection and Suppression



HIGHLIGHT

- Low Capex
- Plug and Play
- Low Field Labor Cost
- Pre-Populated with Batteries
- Flexible Deployment According to The Site Layout

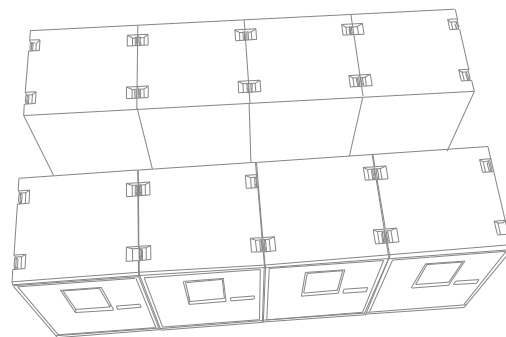

Technical Specification

Item	Specification	
System Model	SU340U85K	SU340U170K

System Information

Nominal AC Power	85kW	170kW
Nameplate Capacity	340.48kWh	

Battery Information

Battery Chemistry	LFP
Capacity	280Ah
Configuration	380S1P
Nominal Voltage	1,216V
Voltage Range	1,064~1,368V

Working Conditions

Degree of Protection	NEMA 3R / IP54
Noise Emission	≤65dB@1m
Operating Temperature Range	-22°F~ 113°F / -30°C~45°C
Relative Humidity	0~95% (Non-condensing)
Max. Working Altitude	6,500ft / 2,000m

System Information

Dimensions (W×H×D)	1,473×2,328×1,390mm
Weight	3,800kg
Cooling	HVAC
Fire Suppression System	Aerosol
Certificate	IEC62619, UL1973, UL9540A

Outdoor Air-Cooling Cabinet BESS