

SC 4000 UP / SC 4200 UP / SC 4400 UP / SC 4600 UP



Efficient

- Up to 4 inverters can be transported in one standard shipping container
- Overdimensioning up to 150% is possible
- Full power at ambient temperatures of up to 35 °C

Robust

- Intelligent air cooling system OptiCool for efficient cooling
- Suitable for outdoor use in all climatic ambient conditions worldwide

Flexible

- One device for all applications
- PV application, optionally available with DC-coupled storage system

Easy to Use

- Improved DC connection area
- Connection area for customer equipment
- Integrated voltage support for internal and external loads

SUNNY CENTRAL UP

The new Sunny Central: more power per cubic meter

With an output of up to 4600 kVA and system voltages of 1500 V DC, the SMA central inverter allows for more efficient system design and a reduction in specific costs for PV and battery power plants. A separate voltage supply and additional space are available for the installation of customer equipment. True 1500 V technology and the intelligent cooling system OptiCool ensure smooth operation even in extreme ambient temperature as well as a long service life of 25 years.

SUNNY CENTRAL UP


Technical Data	SC 4000 UP	SC 4200 UP
DC side		
MPP voltage range V_{DC} (at 25 °C / at 50 °C)	880 to 1325 V / 1100 V	921 to 1325 V / 1050 V
Min. DC voltage $V_{DC, min}$ / Start voltage $V_{DC, Start}$	849 V / 1030 V	891 V / 1071 V
Max. DC voltage $V_{DC, max}$	1500 V	1500 V
Max. DC current $I_{DC, max}$	4750 A	4750 A
Max. short-circuit current $I_{DC, SC}$	8400 A	8400 A
Number of DC inputs	Busbar with 26 connections per terminal, 24 double pole fused (32 single pole fused)	
Number of DC inputs with optional DC coupled storage	18 double pole fused (36 single pole fused) for PV and 6 double pole fused for batteries	
Max. number of DC cables per DC input (for each polarity)	2 x 800 kcmil, 2 x 400 mm ²	
Integrated zone monitoring	○	
Available PV fuse sizes (per input)	200 A, 250 A, 315 A, 350 A, 400 A, 450 A, 500 A	
Available battery fuse size (per input)	750 A	
AC side		
Nominal AC power at $\cos \varphi = 1$ (at 35 °C / at 50 °C)	4000 kVA ¹²⁾ / 3600 kVA	4200 kVA ¹³⁾ / 3780 kVA
Nominal AC active power at $\cos \varphi = 0.8$ (at 35 °C / at 50 °C)	3200 kW ¹²⁾ / 2880 kW	3360 kW ¹³⁾ / 3024 kW
Nominal AC current $I_{AC, nom}$ (at 35 °C / at 50 °C)	3850 A / 3465 A	3850 A / 3465 A
Max. total harmonic distortion	< 3% at nominal power	< 3% at nominal power
Nominal AC voltage / nominal AC voltage range ^{11) 8)}	600 V / 480 V to 720 V	630 V / 504 V to 756 V
AC power frequency / range	50 Hz / 47 Hz to 53 Hz 60 Hz / 57 Hz to 63 Hz > 2	
Min. short-circuit ratio at the AC terminals ⁹⁾	1 / 0.8 overexcited to 0.8 underexcited	
Power factor at rated power / displacement power factor adjustable ^{8) 10)}	1 / 0.8 overexcited to 0.8 underexcited	
Efficiency		
Max. efficiency ²⁾ / European efficiency ²⁾ / CEC efficiency ³⁾	98.8% / 98.6% / 98.5%	98.8% / 98.7% / 98.5%
Protective Devices		
Input-side disconnection point	DC load break switch	
Output-side disconnection point	AC circuit breaker	
DC overvoltage protection	Surge arrester, type I & II	
AC overvoltage protection (optional)	Surge arrester, class I & II	
Lightning protection (according to IEC 62305-1)	Lightning Protection Level III	
Ground-fault monitoring / remote ground-fault monitoring	○ / ○	
Insulation monitoring	○	
Degree of protection: electronics / air duct / connection area (as per IEC 60529)	IP54 / IP34 / IP34	
General Data		
Dimensions (W / H / D)	2815 / 2318 / 1588 mm (110.8 / 91.3 / 62.5 inch)	
Weight	< 3700 kg / < 8158 lb	
Self-consumption (max. ⁴⁾ / partial load ⁵⁾ / average ⁶⁾	< 8100 W / < 1800 W / < 2000 W	
Self-consumption (standby)	< 370 W	
Internal auxiliary power supply	○ Integrated 8.4 kVA transformer	
Operating temperature range ⁸⁾	-25 °C to 60 °C / -13 °F to 140 °F	
Noise emission ⁷⁾	63.0 dB(A)*	
Temperature range (standby)	-40 °C to 60 °C / -40 °F to 140 °F	
Temperature range (storage)	-40 °C to 70 °C / -40 °F to 158 °F	
Max. permissible value for relative humidity (condensing / non-condensing)	95% to 100% (2 month/year) / 0% to 95%	
Maximum operating altitude above MSL ⁸⁾ 1000 m / 2000 m ¹¹⁾ / 3000 m ¹¹⁾	● / ○ / ○ ● / ○ / -	
Fresh air consumption	6500 m ³ /h	
Features		
DC connection	Terminal lug on each input (without fuse)	
AC connection	With busbar system (three busbars, one per line conductor)	
Communication	Ethernet, Modbus Master, Modbus Slave	
Enclosure / roof color	RAL 9016 / RAL 7004	
Supply for external loads	○ (2.5 kVA)	
Standards and directives complied with	CE, IEC / EN 62109-1, IEC / EN 62109-2, AR-N 4110, IEEE1547, UL 840 Cat. IV, Arrêté du 23/04/08	
EMC standards	IEC 55011, IEC 61000-6-2, FCC Part 15 Class A	
Quality standards and directives complied with	VDI/VDE 2862 page 2, DIN EN ISO 9001	
● Standard features ○ Optional - not available * preliminary		
Type designation	SC 4000 UP	SC 4200 UP

- 1) At nominal AC voltage, nominal AC power decreases in the same proportion
- 2) Efficiency measured without internal power supply
- 3) Efficiency measured with internal power supply
- 4) Self-consumption at rated operation
- 5) Self-consumption at < 75% Pn at 25 °C
- 6) Self-consumption averaged out from 5% to 100% Pn at 25 °C
- 7) Sound pressure level at a distance of 10 m


- 8) Values apply only to inverters. Permissible values for SMA MV solutions from SMA can be found in the corresponding data sheets.
- 9) A short-circuit ratio of < 2 requires a special approval from SMA
- 10) Depending on the DC voltage
- 11) Earlier temperature-dependent de-rating and reduction of DC open-circuit voltage
- 12) Nominal AC power at 35 °C achievable up to a maximum of 1050 V_{DC}
- 13) Nominal AC power at 35 °C achievable up to a maximum of 1000 V_{DC}
- 14) Nominal AC power at 35 °C achievable up to a maximum of 1025 V_{DC}

Technical Data	SC 4400 UP	SC 4600 UP
DC side		
MPP voltage range V _{DC} (at 25 °C / at 50 °C)	962 to 1325 V / 1000 V	1003 to 1325 V / 1040 V
Min. DC voltage V _{DC, min} / Start voltage V _{DC, Start}	934 V / 1112 V	976 V / 1153 V
Max. DC voltage V _{DC, max}	1500 V	1500 V
Max. DC current I _{DC, max}	4750 A	4750 A
Max. short-circuit current I _{DC, SC}	8400 A	8400 A
Number of DC inputs	Busbar with 26 connections per terminal, 24 double pole fused (32 single pole fused)	
Number of DC inputs with optional DC coupled storage	18 double pole fused (36 single pole fused) for PV and 6 double pole fused for batteries	
Max. number of DC cables per DC input (for each polarity)	2 x 800 kcmil, 2 x 400 mm ²	
Integrated zone monitoring	○	
Available PV fuse sizes (per input)	200 A, 250 A, 315 A, 350 A, 400 A, 450 A, 500 A	
Available battery fuse size (per input)	750 A	
AC side		
Nominal AC power at cos φ = 1 (at 35 °C / at 50 °C)	4400 kVA ¹³⁾ / 3960 kVA	4600 kVA ¹⁴⁾ / 4140 kVA
Nominal AC active power at cos φ = 0.8 (at 35 °C / at 50 °C)	3520 kW ¹³⁾ / 3168 kW	3680 kW ¹⁴⁾ / 3312 kW
Nominal AC current I _{AC, nom} (at 35 °C / at 50 °C)	3850 A / 3465 A	3850 A / 3465 A
Max. total harmonic distortion	< 3% at nominal power	
Nominal AC voltage / nominal AC voltage range ^{11) 8)}	660 V / 528 V to 759 V	690 V / 552 V to 759 V
AC power frequency / range	50 Hz / 47 Hz to 53 Hz 60 Hz / 57 Hz to 63 Hz > 2	
Min. short-circuit ratio at the AC terminals ⁹⁾	● 1 / 0.8 overexcited to 0.8 underexcited	
Power factor at rated power / displacement power factor adjustable ^{8) 10)}	● 1 / 0.8 overexcited to 0.8 underexcited	
Efficiency		
Max. efficiency ²⁾ / European efficiency ²⁾ / CEC efficiency ³⁾	98.8% / 98.7% / 98.5%	98.9% / 98.7% / 98.5%
Protective Devices		
Input-side disconnection point	DC load break switch	
Output-side disconnection point	AC circuit breaker	
DC overvoltage protection	Surge arrester, type I & II	
AC overvoltage protection (optional)	Surge arrester, class I & II	
Lightning protection (according to IEC 62305-1)	Lightning Protection Level III	
Ground-fault monitoring / remote ground-fault monitoring	○ / ○	
Insulation monitoring	○	
Degree of protection: electronics / air duct / connection area (as per IEC 60529)	IP54 / IP34 / IP34	
General Data		
Dimensions (W / H / D)	2815 / 2318 / 1588 mm (110.8 / 91.3 / 62.5 inch)	
Weight	< 3700 kg / < 8158 lb	
Self-consumption (max. ⁴⁾ / partial load ⁵⁾ / average ⁶⁾	< 8100 W / < 1800 W / < 2000 W	
Self-consumption (standby)	< 370 W	
Internal auxiliary power supply	○ Integrated 8.4 kVA transformer	
Operating temperature range ⁸⁾	-25 °C to 60 °C / -13 °F to 140 °F	
Noise emission ⁷⁾	63.0 dB(A)*	
Temperature range (standby)	-40 °C to 60 °C / -40 °F to 140 °F	
Temperature range (storage)	-40 °C to 70 °C / -40 °F to 158 °F	
Max. permissible value for relative humidity (condensing / non-condensing)	95% to 100% (2 month/year) / 0% to 95%	
Maximum operating altitude above MSL ⁸⁾ 1000 m / 2000 m ¹¹⁾ / 3000 m ¹¹⁾	● / ○ / -	
Fresh air consumption	6500 m ³ /h	
Features		
DC connection	Terminal lug on each input (without fuse)	
AC connection	With busbar system (three busbars, one per line conductor)	
Communication	Ethernet, Modbus Master, Modbus Slave	
Enclosure / roof color	RAL 9016 / RAL 7004	
Supply for external loads	○ (2.5 kVA)	
Standards and directives complied with	CE, IEC / EN 62109-1, IEC / EN 62109-2, AR-N 4110, IEEE1547, UL 840 Cat. IV, Arrêté du 23/04/08	
EMC standards	IEC 55011, IEC 61000-6-2, FCC Part 15 Class A	
Quality standards and directives complied with	VDI/VDE 2862 page 2, DIN EN ISO 9001	
● Standard features ○ Optional – not available * preliminary		
Type designation	SC 4400 UP	SC 4600 UP

SYSTEM DIAGRAM

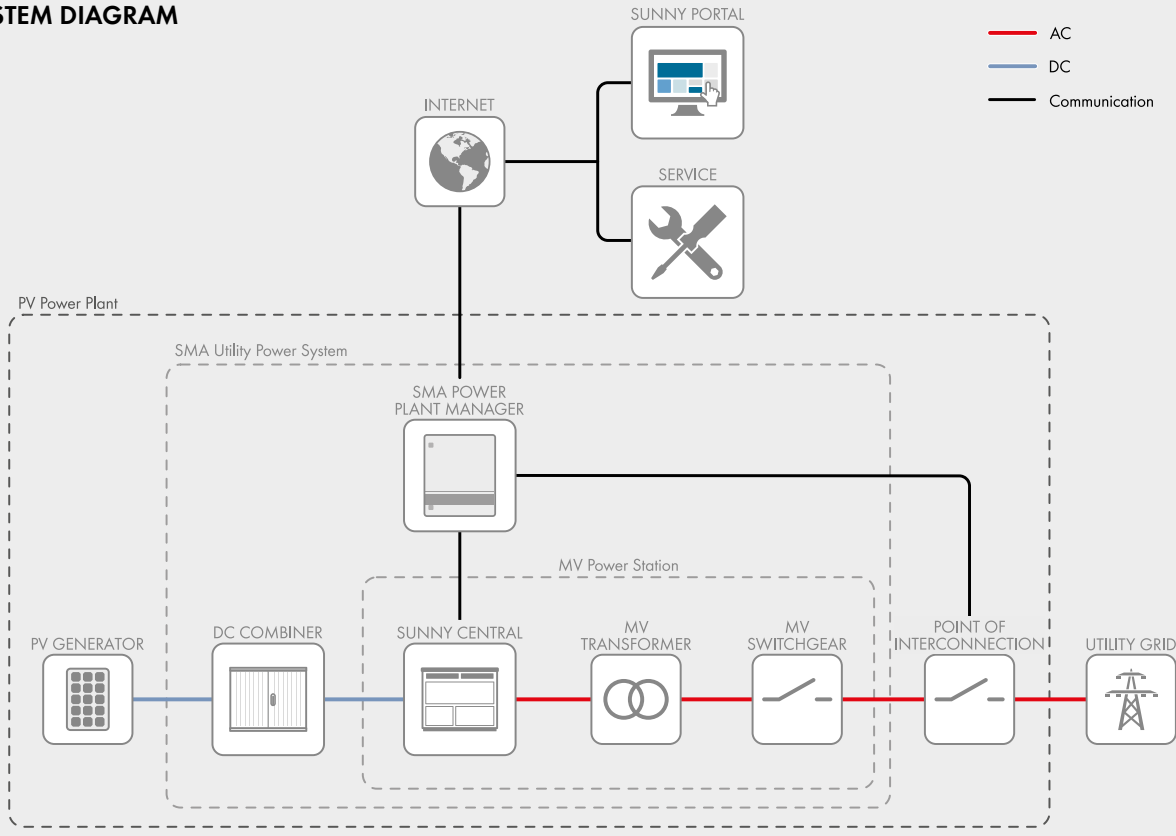

TEMPERATURE BEHAVIOR (at 1000 m)

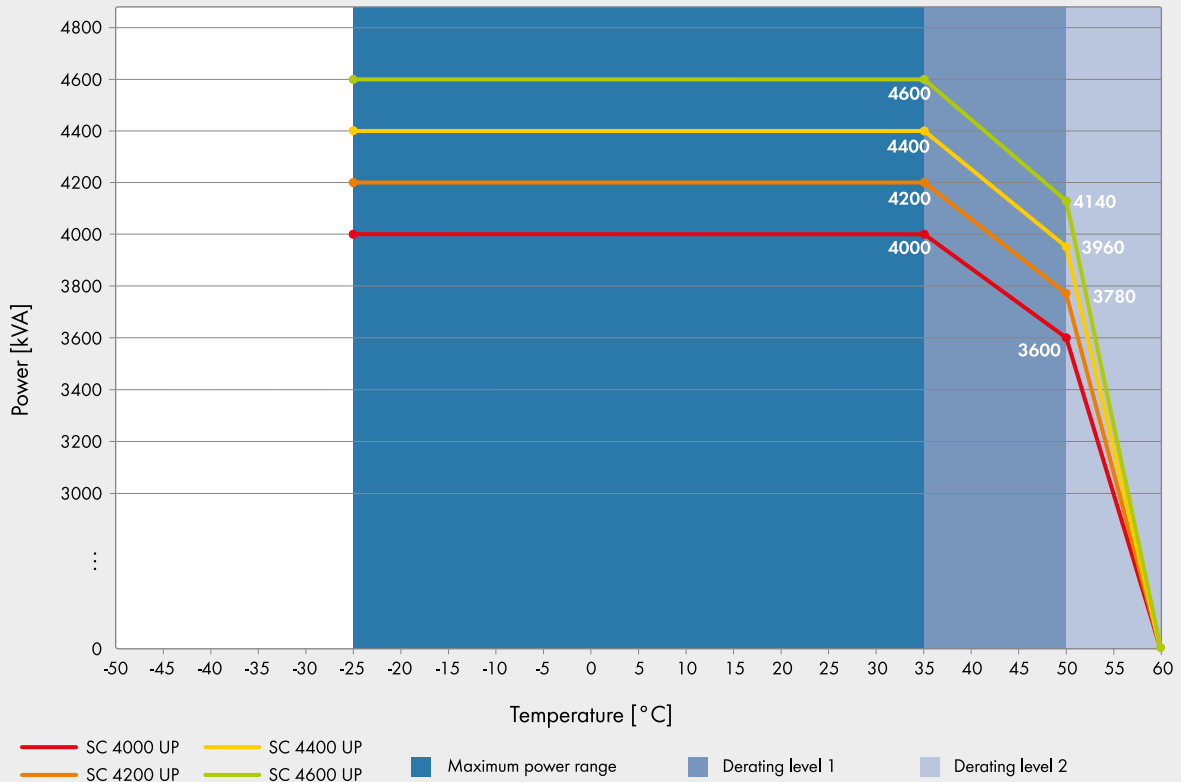

SUNNY CENTRAL STORAGE 1900 / 2200 / 2475 / 2900



SCS-1900-10 / SCS-2200-10 / SCS-2475-10 / SCS-2900-10



Efficient

- High power density
- Max. efficiency is 98.6%
- Lower transportation costs (up to 4 inverters in a standard shipping container)

Robust

- Proven OptiCool™ technology for intelligent, effective cooling
- Can be installed worldwide outdoors in any ambient condition

Flexible

- Conforms to all relevant grid requirements worldwide
- Four quadrant operation for full reactive power support
- Stand-alone device or turnkey solution with medium-voltage block

Versatile

- Integrated battery communication
- Customized monitoring and control of inverters
- Grid management functions for dynamic grid support
- Integrated voltage supply for internal consumption and external loads

SUNNY CENTRAL STORAGE 1900 / 2200 / 2475 / 2900

Battery inverter for large-scale storage systems

Grid-connected storage systems enable the integration of large amounts of intermittent renewable energy into the utility grid while ensuring maximum grid stability. The Sunny Central Storage is the central component of the SMA system solution for integration of large-scale storage systems. It is designed to compensate fluctuations in solar energy generation and offers comprehensive grid management services, e.g., automatic frequency control. The battery inverter is optimized for continuous operation at nominal load and temperature of -25°C to $+50^{\circ}\text{C}$. Thanks to its wide DC voltage range, it is compatible with various types of battery technologies. The Sunny Central Storage is designed to work with the SMA Power Plant Manager and is also available as turnkey solution with the SMA medium-voltage systems.

SUNNY CENTRAL STORAGE 1900 / 2200

Technical Data	SCS 1900	SCS 2200
Battery side (DC)		
DC Voltage range for max. AC power (at 25 °C / at 50 °C) ¹⁾	500 V to 950 V / 950 V	570 V to 950 V / 950 V
Minimal / Maximal DC voltage ²⁾	477 V / 1100 V	545 V / 1100 V
Max. DC current (at 25 °C / at 50 °C)	4060 A / 3690 A	4120 A / 3745 A
Fuse characteristic for battery connection - fuse arcing time limit / energy limit ^{3) 15)}	<1 ms / 40 cal/cm ²	
Number of DC cables per polarity	26	
Grid side (AC)		
Max. AC power (at 25 °C / at 40 °C / at 50 °C) ¹²⁾	1900 kVA / 1796 kVA / 1727 kVA	2200 kVA / 2080 kVA / 2000 kVA
Max. AC current (at 25 °C / at 40 °C / at 50 °C)	3255 A / 3078 A / 2960 A	3300 A / 3120 A / 3000 A
Nominal AC voltage / nominal AC voltage range	337 V / 270 V to 404 V	385 V / 308 V to 462 V
AC power frequency / range	50 Hz / 47 Hz to 53 Hz 60 Hz / 57 Hz to 63 Hz	
Cos Phi at rated power / displacement Cos Phi adjustable ^{10) 14)}	1 / 0.0 overexcited to 0.0 underexcited	
Max. total harmonic distortion	< 3% at nominal power	
Min. short-circuit ratio at the AC terminals	2	
Efficiency		
Max. efficiency ⁴⁾ / European efficiency ⁴⁾	98.6% / 98.3%	98.6% / 98.4%
Protective Devices		
Input-side disconnection point	DC load-break switch	
Output-side disconnection point	AC circuit breaker	
DC overvoltage protection	Surge arrester, type I	
AC overvoltage protection	○ Surge arrester, class I	
Lightning protection (according to IEC 62305-1)	Lightning Protection Level III	
Ground-fault monitoring / remote ground-fault monitoring	○ / ○	
Insulation monitoring	●	
Degree of protection: electronics / air duct / connection area (as per IEC 60529)	IP65 / IP34 / IP34	
General Data		
Dimensions (W / H / D)	2780 mm / 2318 mm / 1588 mm	
Weight	< 3400 kg	
Self-consumption (max. ⁵⁾ / partial load ⁶⁾ / average ⁷⁾	< 8100 W / < 1800 W / < 2000 W	
Self-consumption (standby)	< 300 W	
Auxiliary power supply: integrated 8.4 kVA transformer / external	● / ○	
Operating temperature range	-25 °C to 60 °C	
Noise emission ⁸⁾	< 64.7 dB(A)	
Temperature range (standby)	-40 °C to 60 °C	
Temperature range (storage)	-40 °C to 70 °C	
Max. permissible value for relative humidity (condensing / non-condensing)	95% to 100% (2 month/year) / 0% to 95%	
Maximum operating altitude above MSL ⁹⁾ 1000 m / 2000 m ¹¹⁾ / 3000 m ¹¹⁾	● / ○ / ○	
Fresh air consumption	6500 m ³ /h	
Features		
DC connection	Terminal lugs on each input (without fuse)	
AC connection	With busbar system (three busbars, one per line conductor)	
Communication	Ethernet, Modbus Master, Modbus Slave	
Enclosure / roof color	RAL 9016 / RAL 7004	
Display	● Indicator lights / ○ HMI touchscreen (10.1")	
Supply transformer for external loads	○ (2.5 kVA)	
Standards and directives complied with	CE, IEC / EN 62109-1, IEC / EN 62109-2	
EMC standards	IEC / EN 61000-6-4, IEC / EN 61000-6-2, EN 55022	
● Standard features ○ Optional		
Type designation	SCS-1900-10	SCS-2200-10

1) Another voltage range can be offered on request

2) With power derating

3) Battery short circuit disconnection has to be done on the battery side

4) Efficiency measured without internal power supply

5) Self-consumption at rated operation

6) Self-consumption at < 75% P_n at 25 °C

7) Self-consumption averaged out from 5% to 100% P_n at 25 °C

8) Sound pressure level at a distance of 10 m

9) Values apply only to inverters. Permissible values for SMA MV solutions from SMA can be found in the corresponding data sheets.

10) Depending on the DC voltage

11) Earlier temperature-dependent derating

12) Measured at cos φ 0.8 underexcited to 0.8 overexcited

13) Additional apparent power derating might apply for a combination of the following conditions: > 45 °C, > 1080 V DC, power factor < 0.9 underexcited and > 900 m MSL

14) Max reactive power is limited to 60% of the max apparent power

15) Released energy limit in an event of error

SUNNY CENTRAL STORAGE 2475 / 2900

Technical Data	SCS 2475	SCS 2900 ¹³⁾
Battery side (DC)		
DC Voltage range for max. AC power (at 25 °C / at 50 °C) ¹⁾	634 V to 1000 V / 1000 V	760 V to 1100 V / 1100 V
Minimal / Maximal DC voltage ²⁾	614 V / 1100 V	740 V / 1100 V
Max. DC current (at 25 °C / at 50 °C)	4110 A / 3735 A	4055 A / 3686 A
Fuse characteristic for battery connection - fuse arcing time limit / energy limit ^{3) 15)}	1 ms / 40 cal/cm ²	
Number of DC cables per polarity	26	
Grid side (AC)		
Max. AC power at 1000 VDC (at 25 °C / at 40 °C / at 50 °C) ¹²⁾	2475 kVA / 2340 kVA / 2250 kVA	2940 kVA / 2780 kVA / 2670 kVA
Max. AC power at 1100 VDC (at 25 °C / at 40 °C / at 50 °C) ¹²⁾	–	2940 kVA / 2670 kVA / 2250 kVA
Max. AC current (at 25 °C / at 40 °C / at 50 °C)	3292 A / 3113 A / 2993 A	3265 A / 3087 A / 2968 A
Nominal AC voltage / nominal AC voltage range	434 V / 347 V to 520 V	520 V / 416 V to 624 V
AC power frequency / range	50 Hz / 47 Hz to 53 Hz 60 Hz / 57 Hz to 63 Hz	
Cos Phi at rated power / displacement Cos Phi adjustable ^{10) 14)}	1 / 0.0 overexcited to 0.0 underexcited	
Max. total harmonic distortion	< 3% at nominal power	
Min. short-circuit ratio at the AC terminals	2	
Efficiency		
Max. efficiency ⁴⁾ / European efficiency ⁴⁾	98.6% / 98.4%	max. eta 98.6%
Protective Devices		
Input-side disconnection point	DC load-break switch	
Output-side disconnection point	AC circuit breaker	
DC overvoltage protection	Surge arrester, type I	
AC overvoltage protection	○ Surge arrester, class I	
Lightning protection (according to IEC 62305-1)	Lightning Protection Level III	
Ground-fault monitoring / remote ground-fault monitoring	○ / ○	
Insulation monitoring	●	
Degree of protection: electronics / air duct / connection area (as per IEC 60529)	IP65 / IP34 / IP34	
General Data		
Dimensions (W / H / D)	2780 mm / 2318 mm / 1588 mm	
Weight	< 3400 kg	
Self-consumption (max. ⁵⁾ / partial load ⁶⁾ / average ⁷⁾)	< 8100 W / < 1800 W / < 2000 W	
Self-consumption (standby)	< 300 W	
Auxiliary power supply: integrated 8.4 kVA transformer / external	● / ○	
Operating temperature range	-25 °C to 60 °C	
Noise emission ⁸⁾	< 64.7 dB(A)	
Temperature range (standby)	-40 °C to 60 °C	
Temperature range (storage)	-40 °C to 70 °C	
Max. permissible value for relative humidity (condensing / non-condensing)	95% to 100% (2 month/year) / 0% to 95%	
Maximum operating altitude above MSL ⁹⁾ 1000 m / 2000 m ¹¹⁾ / 3000 m ¹¹⁾	● / ○ / ○	
Fresh air consumption	6500 m ³ /h	
Features		
DC connection	Terminal lugs on each input (without fuse)	
AC connection	With busbar system (three busbars, one per line conductor)	
Communication	Ethernet, Modbus Master, Modbus Slave	
Enclosure / roof color	RAL 9016 / RAL 7004	
Display	● Identicator lights / ○ HMI touchscreen (10.1")	
Supply transformer for external loads	○ (2.5 kVA)	
Standards and directives complied with	CE, IEC / EN 62109-1, IEC / EN 62109-2	
EMC standards	IEC / EN 61000-6-4, IEC / EN 61000-6-2, EN 55022	
● Standard features ○ Optional		
Type designation	SCS-2475-10	SCS-2900-10

1) Another voltage range can be offered on request

2) With power derating

3) Battery short circuit disconnection has to be done on the battery side

4) Efficiency measured without internal power supply

5) Self-consumption at rated operation

6) Self-consumption at < 75% Pn at 25 °C

7) Self-consumption averaged out from 5% to 100% Pn at 25 °C

8) Sound pressure level at a distance of 10 m

9) Values apply only to inverters. Permissible values for SMA MV solutions from SMA can be found in the corresponding data sheets.

10) Depending on the DC voltage

11) Earlier temperature-dependent derating

12) Measured at cos φ 0.8 underexcited to 0.8 overexcited

13) Additional apparent power derating might apply for a combination of the following conditions: > 45 °C, > 1080 V DC, power factor < 0.9 underexcited and > 900 m MSL


14) Max reactive power is limited to 60% of the max apparent power

15) Released energy limit in an event of error

SUNNY CENTRAL STORAGE APPLICATIONS

- Provides ancillary grid services
- Supports the growth of renewable energy in public grids
- Increases fuel saving potential in PV hybrid diesel systems

- DC
- AC
- Modbus TCP
- SMA scope
- Customer scope
- *with own BMS

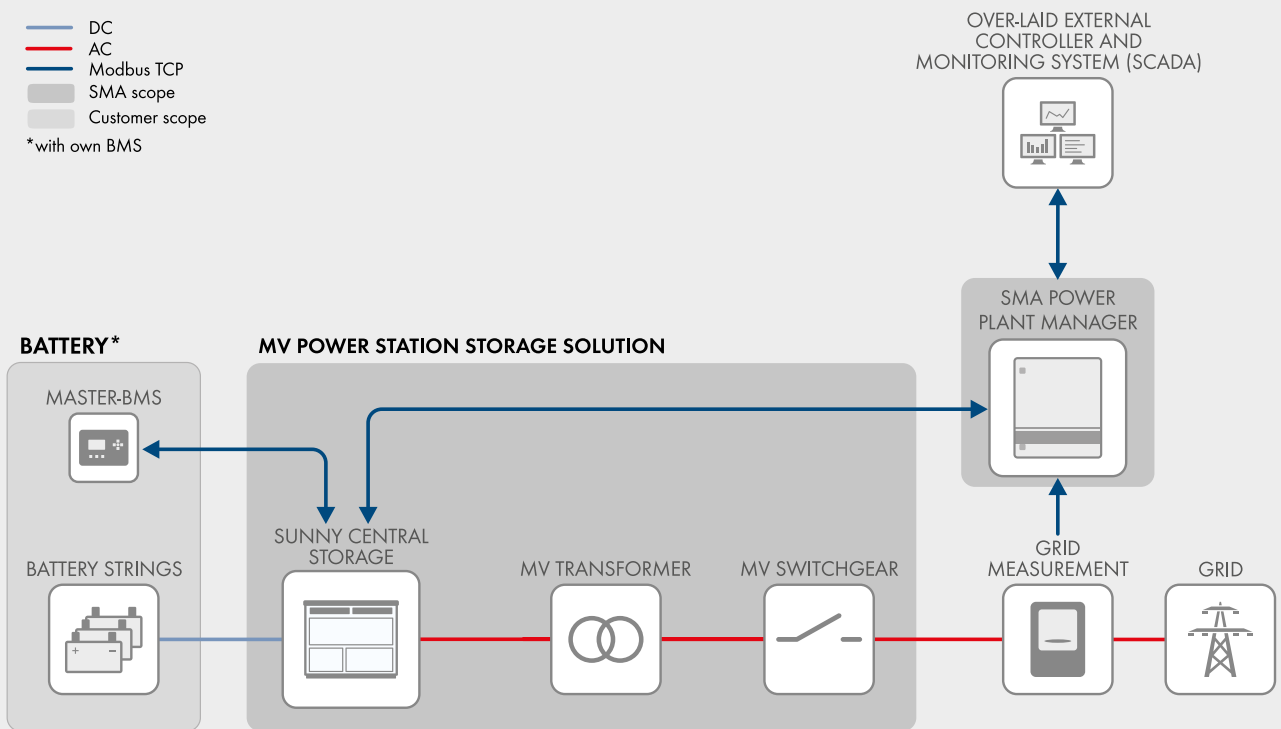

By combining several of these schemes, higher power systems can be realized

Grid-connected functions

- Setpoints for active and reactive power
- Static grid support $Q(U)$, $P(f)$
- Dynamic grid support (FRT)
- Active islanding detection (AID)
- High compatibility with different battery types

Compatible with energy management system functionalities

- External static grid supporting functions
- Ramp-rate control of PV power
- Peak shaving
- Energy shifting
- Genset optimization control
- Reducing necessary spinning reserve of gensets
- Battery start-up and stop sequence
- Operates the battery within optimal operation window
- Grid Forming
- Black Start