

NMOT* (Nominal Module Operating Temperature):
Irradiance 800W/sqm, Ambient Temperature 20°C, AM 1.5, Wind Speed 1m/s

*Power measurement tolerance: $\pm 3\%$ Cells temp. $\pm 25^{\circ}\text{C}$ Unit: mW/m²/mm


Packaging Info

[Two pellets = One stock]

31pcs/roll, 550pcs/40HQ Container



Mysolar reserves the right to make necessary adjustment to the information described herein at any time without further notice due to continuous innovation and product improvement. Please be kindly noted installation of Mysolar solar modules shall be done by professional skilled people. Please read the installation manual carefully before using Mysolar solar panels.

Modulo Mysolar-GOLD-HJT-bifacial 710W

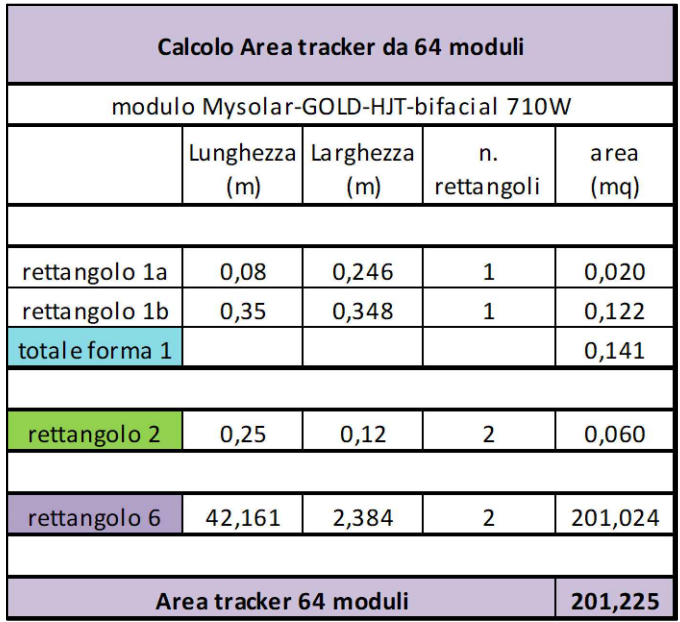

Calcolo superficie coperta scala 1:100

Tracker 32 moduli scala 1:100

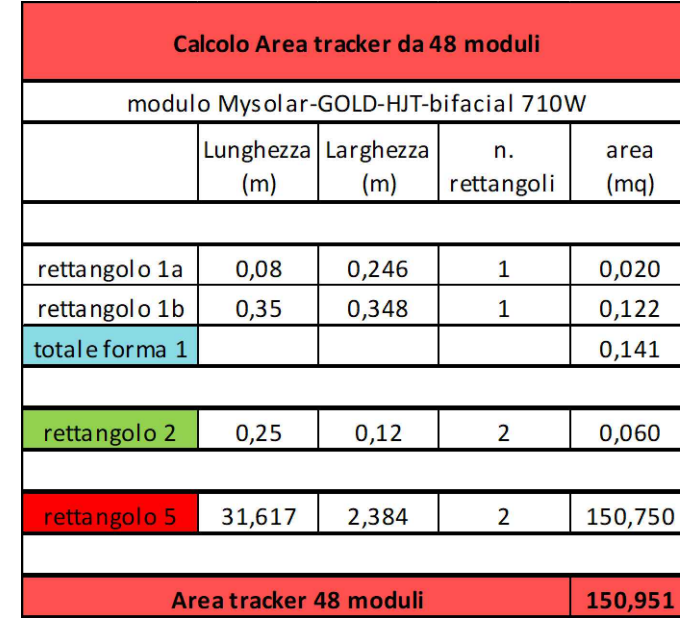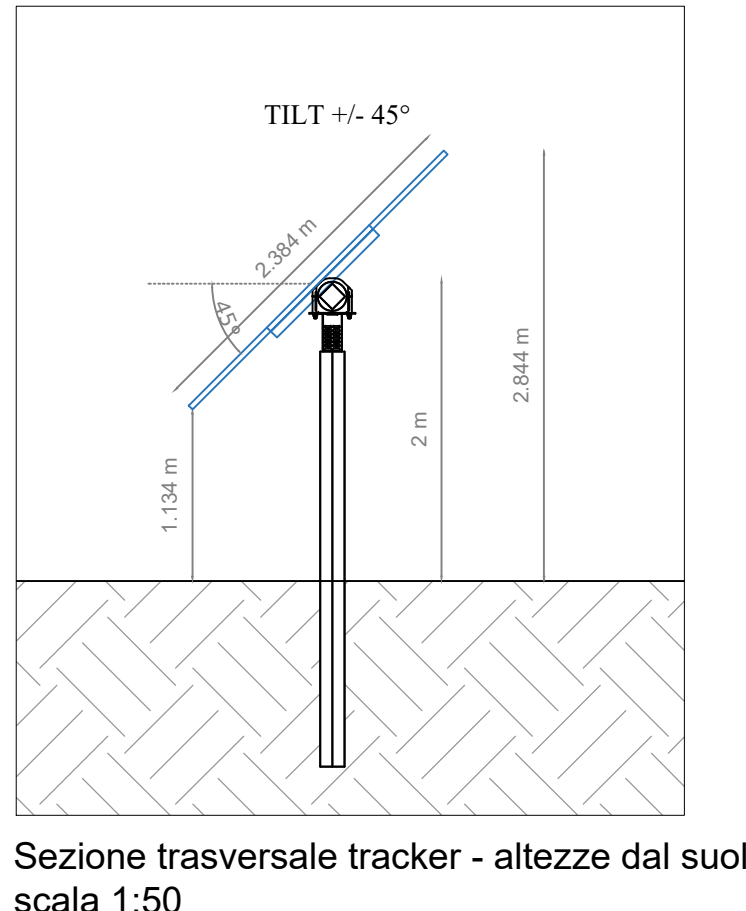

Calcolo superficie coperta scala 1:100

Tracker 48 moduli scala 1:100