

## **ANNESSO TECNICO 6.**

### **Elaborati di calcolo Scenari incidentali ragionevolmente credibili**

### ***Ipotesi N. 20***

TRR S.r.l.

Il Direttore Generale


Ing. *Alfredo Romano*






Study Folder: 70977-Fase  
1-lp20  
Audit No: 65784  
Model: 10mm  
Weather: Category 5/D  
Material: METHANE  
Concentration

— 2.2e+004 ppm  
— 4.4e+004 ppm

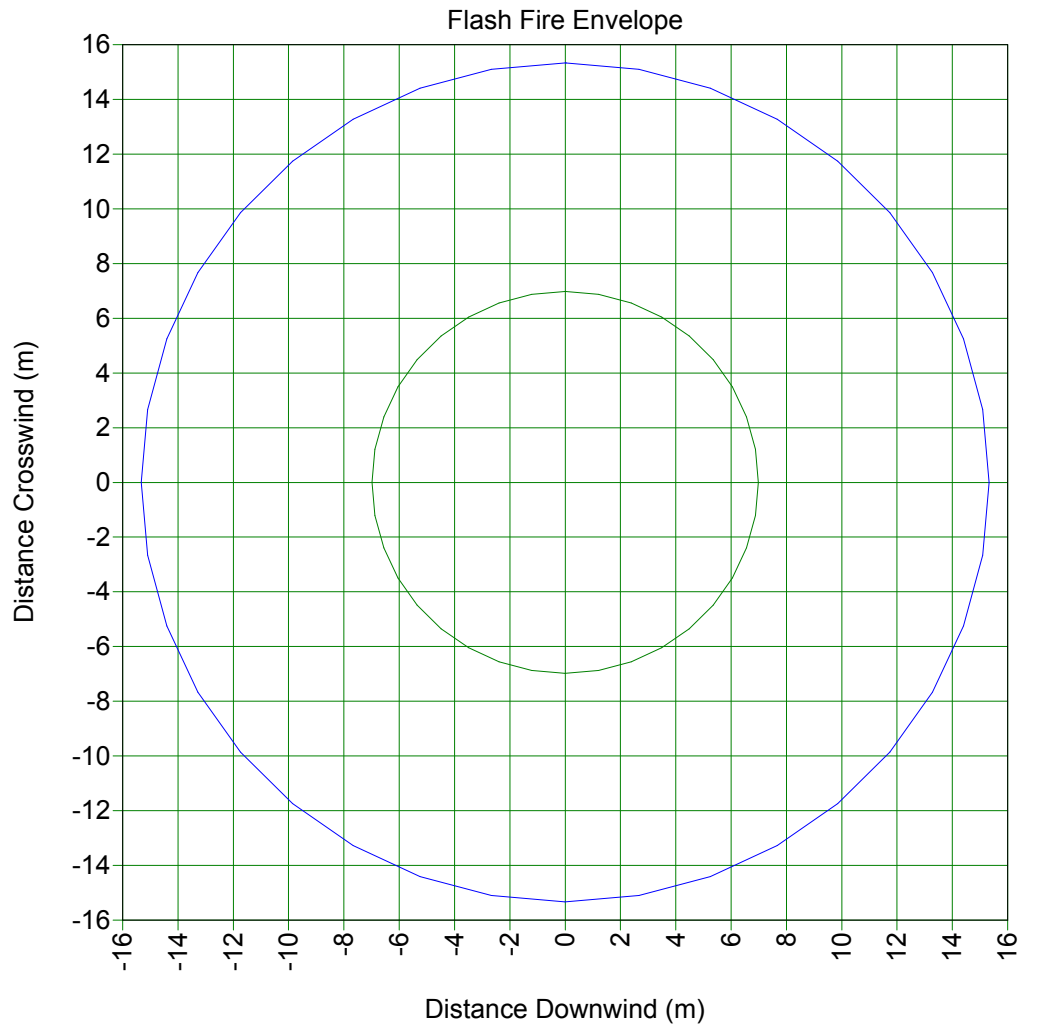

Study Folder: 70977-Fase  
1-lp20  
Audit No: 65784  
Model: 10mm  
Weather: Category 2/F  
Material: METHANE  
Concentration

— 2.2e+004 ppm  
— 4.4e+004 ppm

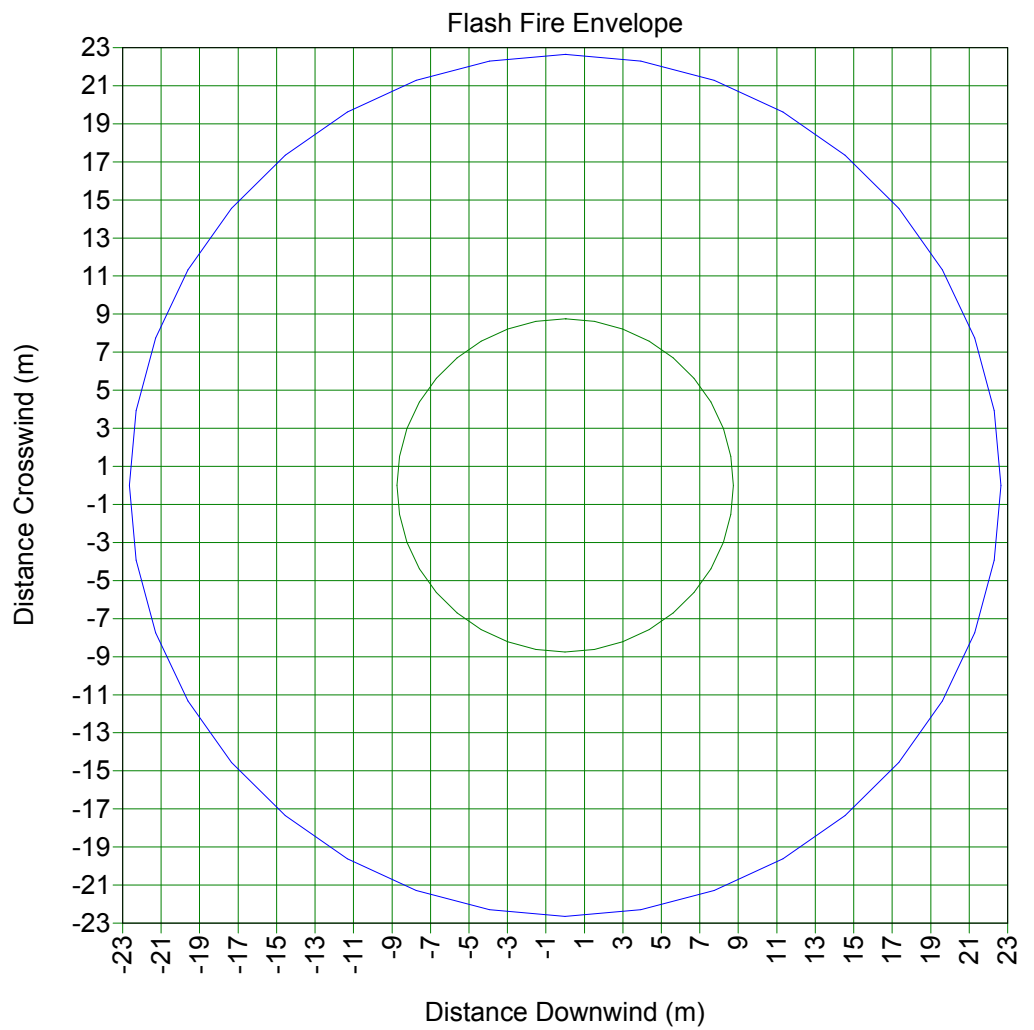

# JET FIRE REPORT

Study Folder: 70977-Fase 1-Ip20

Unique Audit Number: 65.784



Phast 6.6

70977-Fase 1-Ip20

Air-Cooler

10mm

Base Case

Data



Weather: Global Weathers/Category 2/F

Speed: 2,00 m/s

Stability: F

\\70977-Fase 1-Ip20\Air-Cooler\10mm

## Flame Data

### User-Defined Quantities

	API	
Model Correlation Type	METHANE	
Material		
Ambient Temperature	25,00	degC
Ambient Relative Humidity	0,75	fraction
Ambient Wind Speed	2,00	m/s
Maximum Exposure Duration	20,00	s
Elevation	1,00	m
Expanded Temperature	-53,30	degC
Release Rate	1,23	kg/s

	Input	Output
Flame Emissive Power		111,96 kW/m2
Fraction of Emissivity		0,15 fraction
Expanded Radius		0,03 m
Jet Velocity	500,00	500,00 m/s
Flame Length		17,32 m
Maximum Flame Radius		1,08 m

### Flame Co-ordinates

X	Z	R	Phi
m	m	m	deg
0,00	1,00	0,03	90,00
1,92	1,00	0,41	90,00
3,85	1,00	0,68	90,00
5,77	1,00	0,88	90,00
7,70	1,00	1,00	90,00
9,62	1,00	1,07	90,00
11,54	1,00	1,07	90,00
13,47	1,00	0,98	90,00
15,39	1,00	0,77	90,00
17,32	1,00	0,00	90,00



**Radiation Intensity Ellipse**

**User-Defined Quantities**

Observer Inclination	Variable	deg
Observer Orientation	Variable	deg
Exposure Duration	20,00	s
Effect Height	0,00	m

**Calculated Quantities**

<b>Incident Radiation Level:</b>	<b>3,00</b>	<b>kW/m2</b>
Lethality Level	0,00	%
View Factor	0,03	
Dose Level	865.118,83	(W/m2)^Probit N.s

Downwind semi-axis (A)	10,73	m
Crosswind semi-axis (B)	14,91	m
Offset Ratio (D)	0,86	
Effect Distance	19,93	m
Area	502,66	m2

<b>Incident Radiation Level:</b>	<b>5,00</b>	<b>kW/m2</b>
Lethality Level	0,00	%
View Factor	0,04	
Dose Level	1.709.490,54	(W/m2)^Probit N.s

Downwind semi-axis (A)	9,84	m
Crosswind semi-axis (B)	11,22	m
Offset Ratio (D)	0,92	
Effect Distance	18,87	m
Area	346,70	m2

<b>Incident Radiation Level:</b>	<b>7,00</b>	<b>kW/m2</b>
Lethality Level	0,02	%
View Factor	0,06	
Dose Level	2.677.313,40	(W/m2)^Probit N.s

Downwind semi-axis (A)	9,32	m
Crosswind semi-axis (B)	9,18	m
Offset Ratio (D)	0,97	
Effect Distance	18,33	m
Area	269,02	m2

# JET FIRE REPORT

Study Folder: 70977-Fase 1-1p20

Unique Audit Number: 65.784



Phast 6.6

---

<b>Incident Radiation Level:</b>	<b>12,50</b>	kW/m2
Lethality Level	6,53	%
View Factor	0,11	
Dose Level	5.800.161,90	(W/m2)^Probit N.s
Downwind semi-axis (A)	8,70	m
Crosswind semi-axis (B)	6,28	m
Offset Ratio (D)	1,02	
Effect Distance	17,58	m
Area	171,55	m2

# JET FIRE REPORT

Study Folder: 70977-Fase 1-1p20

Unique Audit Number: 65.784



Phast 6.6

## Radiation Distance

### User-Defined Quantities

Maximum Distance	500,00	m
Angle from Wind Direction	0,00	deg
Height above Origin	0,00	m
Observer Inclination	Variable	deg
Observer Orientation	Variable	deg

### Calculated Quantities

X Coordinates m	Y Coordinates m	Z Coordinates m	Incident Radiation kW/m2	Lethality Level %	View Factor
0,00			9,80		
10,20			111,96		
20,41			2,49		
30,61			0,31		
40,82			0,12		
51,02			0,06		
61,22			0,04		
71,43			0,03		
81,63			0,02		
91,84			0,01		
102,04			0,01		
112,24			0,01		
122,45			0,01		
132,65			0,01		
142,86			0,00		
153,06			0,00		
163,27			0,00		
173,47			0,00		
183,67			0,00		
193,88			0,00		
204,08			0,00		
214,29			0,00		
224,49			0,00		
234,69			0,00		
244,90			0,00		
255,10			0,00		
265,31			0,00		
275,51			0,00		
285,71			0,00		
295,92			0,00		
306,12			0,00		
316,33			0,00		
326,53			0,00		
336,73			0,00		
346,94			0,00		
357,14			0,00		
367,35			0,00		



# JET FIRE REPORT


Unique Audit Number: 65.784



Study Folder: 70977-Fase 1-IP20

Phast 6.6

X Coordinates m	Y Coordinates m	Z Coordinates m	Incident Radiation kW/m2	Lethality Level %	View Factor
377,55			0,00		
387,76			0,00		
397,96			0,00		
408,16			0,00		
418,37			0,00		
428,57			0,00		
438,78			0,00		
448,98			0,00		
459,18			0,00		
469,39			0,00		
479,59			0,00		
489,80			0,00		
500,00			0,00		

 **Weather:** Global Weathers\Category 5/D  
**Speed:** 5.00 **m/s** **Stability:** D

\70977-Fase 1-IP20\Air-Cooler\10mm

## Flame Data

### User-Defined Quantities

	API	
Model Correlation Type	METHANE	
Material		
Ambient Temperature	25,00	degC
Ambient Relative Humidity	0,75	fraction
Ambient Wind Speed	5,00	m/s
Maximum Exposure Duration	20,00	s
Elevation	1,00	m
Expanded Temperature	-53,30	degC
Release Rate	1,23	kg/s

	Input	Output
Flame Emissive Power		111,96 kW/m2
Fraction of Emissivity		0,15 fraction
Expanded Radius		0,03 m
Jet Velocity	500,00	500,00 m/s
Flame Length		17,32 m
Maximum Flame Radius		1,08 m

# JET FIRE REPORT

Study Folder: 70977-Fase 1-Ip20

Unique Audit Number: 65.784



Phast 6.6

---

## Flame Co-ordinates

<b>X</b>	<b>Z</b>	<b>R</b>	<b>Phi</b>
m	m	m	deg
0,00	1,00	0,03	90,00
1,92	1,00	0,41	90,00
3,85	1,00	0,68	90,00
5,77	1,00	0,88	90,00
7,70	1,00	1,00	90,00
9,62	1,00	1,07	90,00
11,54	1,00	1,07	90,00
13,47	1,00	0,98	90,00
15,39	1,00	0,77	90,00
17,32	1,00	0,00	90,00



**Radiation Intensity Ellipse**

**User-Defined Quantities**

Observer Inclination	Variable	deg
Observer Orientation	Variable	deg
Exposure Duration	20,00	s
Effect Height	0,00	m

**Calculated Quantities**

<b>Incident Radiation Level:</b>	<b>3,00</b>	<b>kW/m2</b>
Lethality Level	0,00	%
View Factor	0,03	
Dose Level	865.118,83	(W/m2)^Probit N.s

Downwind semi-axis (A)	10,73	m
Crosswind semi-axis (B)	14,91	m
Offset Ratio (D)	0,86	
Effect Distance	19,93	m
Area	502,66	m2

<b>Incident Radiation Level:</b>	<b>5,00</b>	<b>kW/m2</b>
Lethality Level	0,00	%
View Factor	0,04	
Dose Level	1.709.490,54	(W/m2)^Probit N.s

Downwind semi-axis (A)	9,84	m
Crosswind semi-axis (B)	11,22	m
Offset Ratio (D)	0,92	
Effect Distance	18,87	m
Area	346,70	m2

<b>Incident Radiation Level:</b>	<b>7,00</b>	<b>kW/m2</b>
Lethality Level	0,02	%
View Factor	0,06	
Dose Level	2.677.313,40	(W/m2)^Probit N.s

Downwind semi-axis (A)	9,32	m
Crosswind semi-axis (B)	9,18	m
Offset Ratio (D)	0,97	
Effect Distance	18,33	m
Area	269,02	m2

# JET FIRE REPORT

Study Folder: 70977-Fase 1-Ip20

Unique Audit Number: 65.784



Phast 6.6

---

<b>Incident Radiation Level:</b>	<b>12,50</b>	kW/m2
Lethality Level	6,53	%
View Factor	0,11	
Dose Level	5.800.161,90	(W/m2)^Probit N.s
Downwind semi-axis (A)	8,70	m
Crosswind semi-axis (B)	6,28	m
Offset Ratio (D)	1,02	
Effect Distance	17,58	m
Area	171,55	m2

# JET FIRE REPORT

Study Folder: 70977-Fase 1-1p20

Unique Audit Number: 65.784



Phast 6.6

## Radiation Distance

### User-Defined Quantities

Maximum Distance	500,00	m
Angle from Wind Direction	0,00	deg
Height above Origin	0,00	m
Observer Inclination	Variable	deg
Observer Orientation	Variable	deg

### Calculated Quantities

X Coordinates m	Y Coordinates m	Z Coordinates m	Incident Radiation kW/m2	Lethality Level %	View Factor
0,00			9,80		
10,20			111,96		
20,41			2,49		
30,61			0,31		
40,82			0,12		
51,02			0,06		
61,22			0,04		
71,43			0,03		
81,63			0,02		
91,84			0,01		
102,04			0,01		
112,24			0,01		
122,45			0,01		
132,65			0,01		
142,86			0,00		
153,06			0,00		
163,27			0,00		
173,47			0,00		
183,67			0,00		
193,88			0,00		
204,08			0,00		
214,29			0,00		
224,49			0,00		
234,69			0,00		
244,90			0,00		
255,10			0,00		
265,31			0,00		
275,51			0,00		
285,71			0,00		
295,92			0,00		
306,12			0,00		
316,33			0,00		
326,53			0,00		
336,73			0,00		
346,94			0,00		
357,14			0,00		
367,35			0,00		

# JET FIRE REPORT

Study Folder: 70977-Fase 1-Ip20

Unique Audit Number: 65.784




Phast 6.6

---

X Coordinates m	Y Coordinates m	Z Coordinates m	Incident Radiation kW/m2	Lethality Level %	View Factor
377,55			0,00		
387,76			0,00		
397,96			0,00		
408,16			0,00		
418,37			0,00		
428,57			0,00		
438,78			0,00		
448,98			0,00		
459,18			0,00		
469,39			0,00		
479,59			0,00		
489,80			0,00		
500,00			0,00		


Study Folder: 70977-Fase  
1-lp20  
Audit No: 65784  
Model: 10mm  
Weather: Category 5/D  
Material: METHANE

- Ellipse @12.5 kW/m<sup>2</sup>
- Ellipse @7 kW/m<sup>2</sup>
- Ellipse @5 kW/m<sup>2</sup>
- Ellipse @3 kW/m<sup>2</sup>

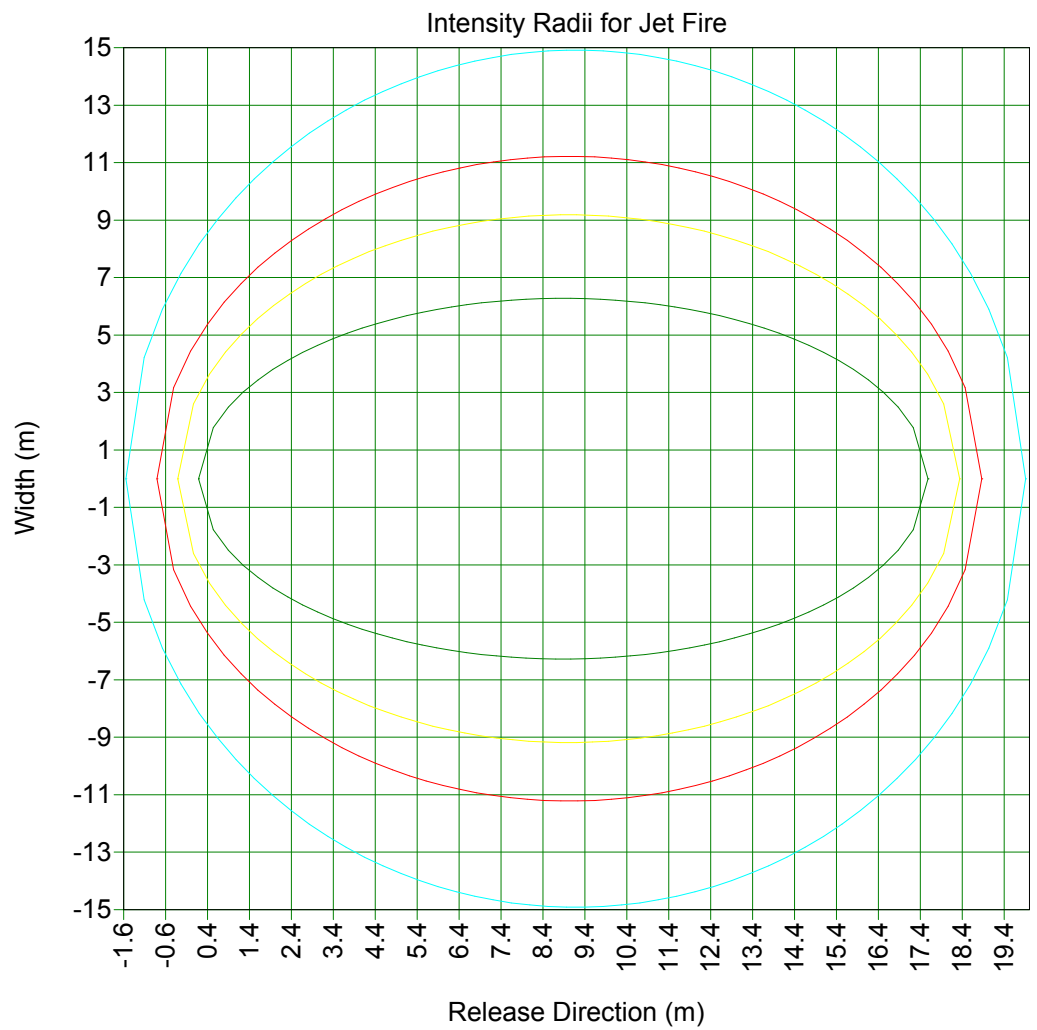

Study Folder: 70977-Fase  
1-lp20  
Audit No: 65784  
Model: 10mm  
Weather: Category 2/F  
Material: METHANE


- Ellipse @12.5 kW/m<sup>2</sup>
- Ellipse @7 kW/m<sup>2</sup>
- Ellipse @5 kW/m<sup>2</sup>
- Ellipse @3 kW/m<sup>2</sup>

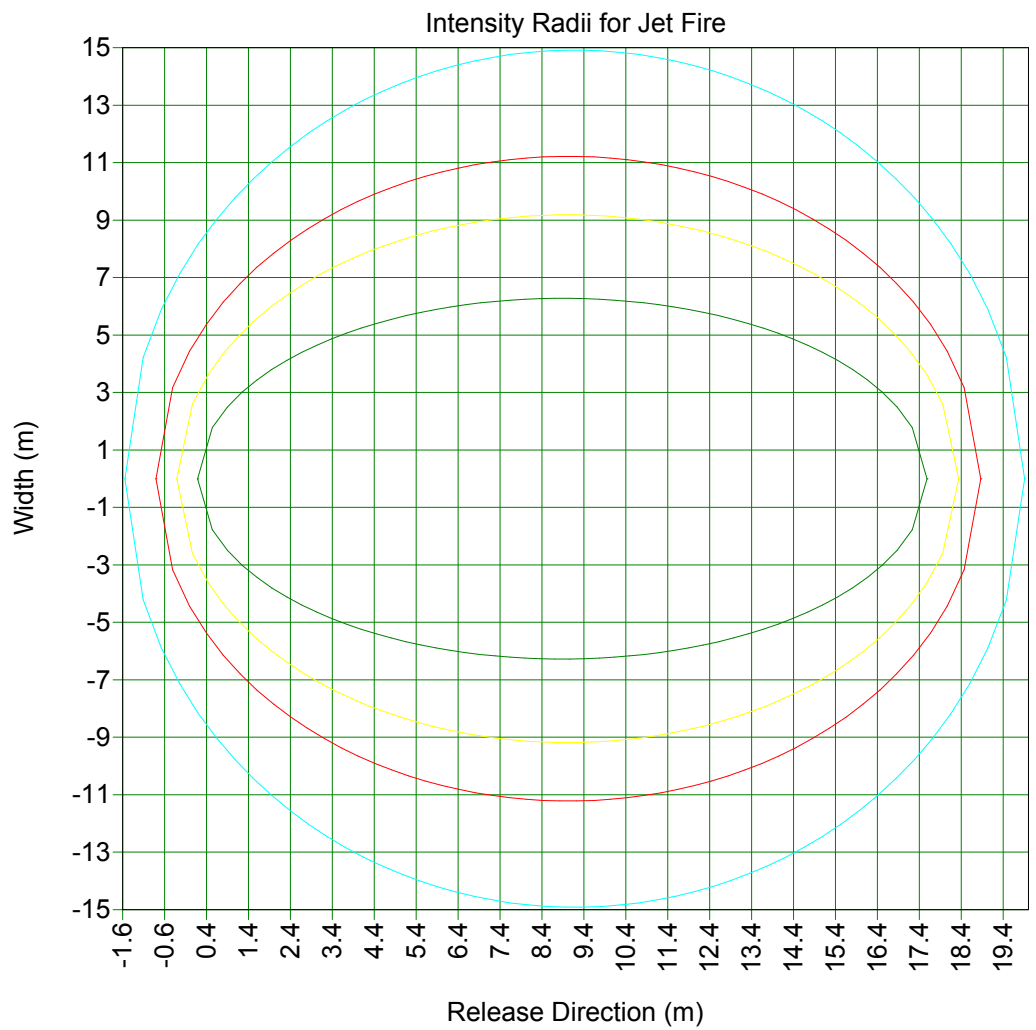




Study Folder: 70977-Fase  
1-lp20  
Audit No: 65784  
Model: 10mm  
Weather: Category 5/D  
Material: METHANE  
Averaging Time:  
Flammable(18.75 s)  
C/L Offset: 0 m  
Concentration  
Time: 0.2161 s

— 2.2e+004 ppm  
— 4.4e+004 ppm  
— 1.65e+005 ppm

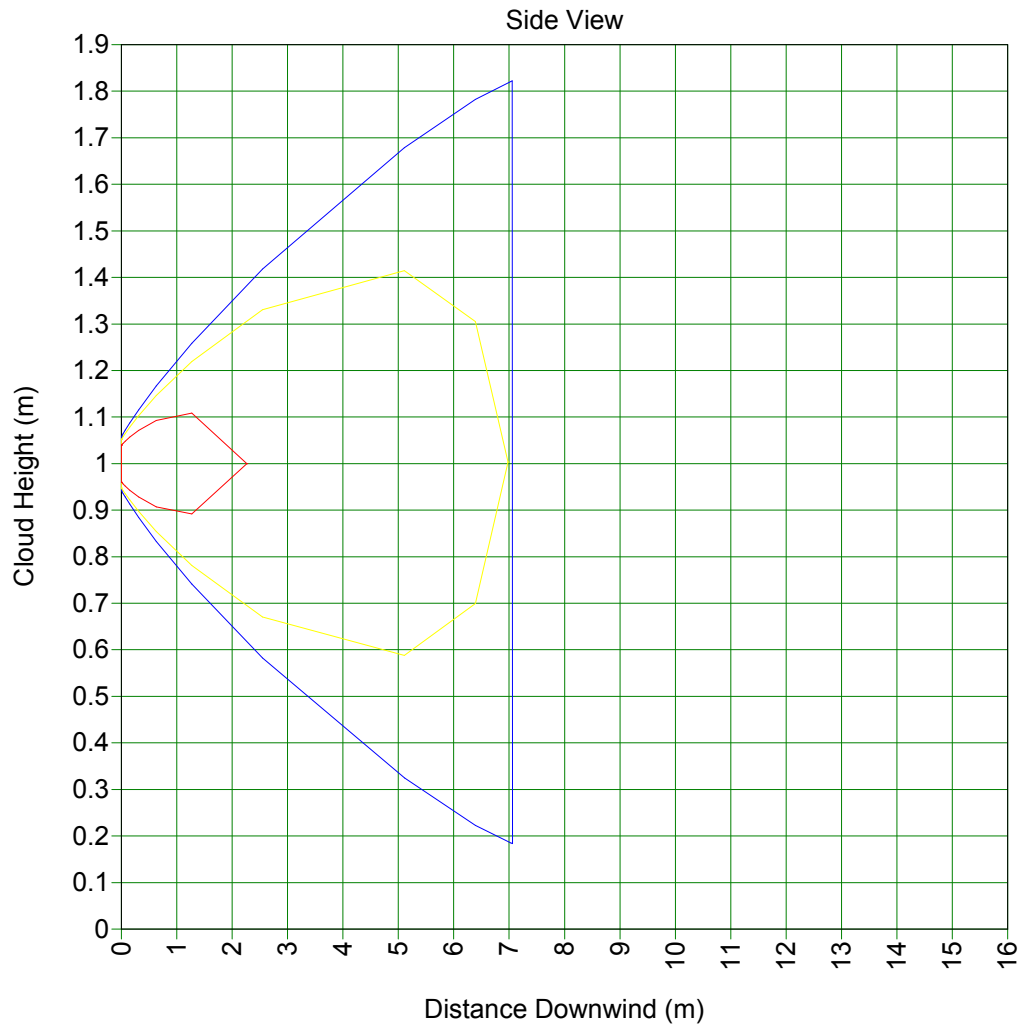

Study Folder: 70977-Fase  
1-lp20  
Audit No: 65784  
Model: 10mm  
Weather: Category 2/F  
Material: METHANE  
Averaging Time:  
Flammable(18.75 s)  
C/L Offset: 0 m  
Concentration  
Time: 0.3663 s

- 2.2e+004 ppm
- 4.4e+004 ppm
- 1.65e+005 ppm

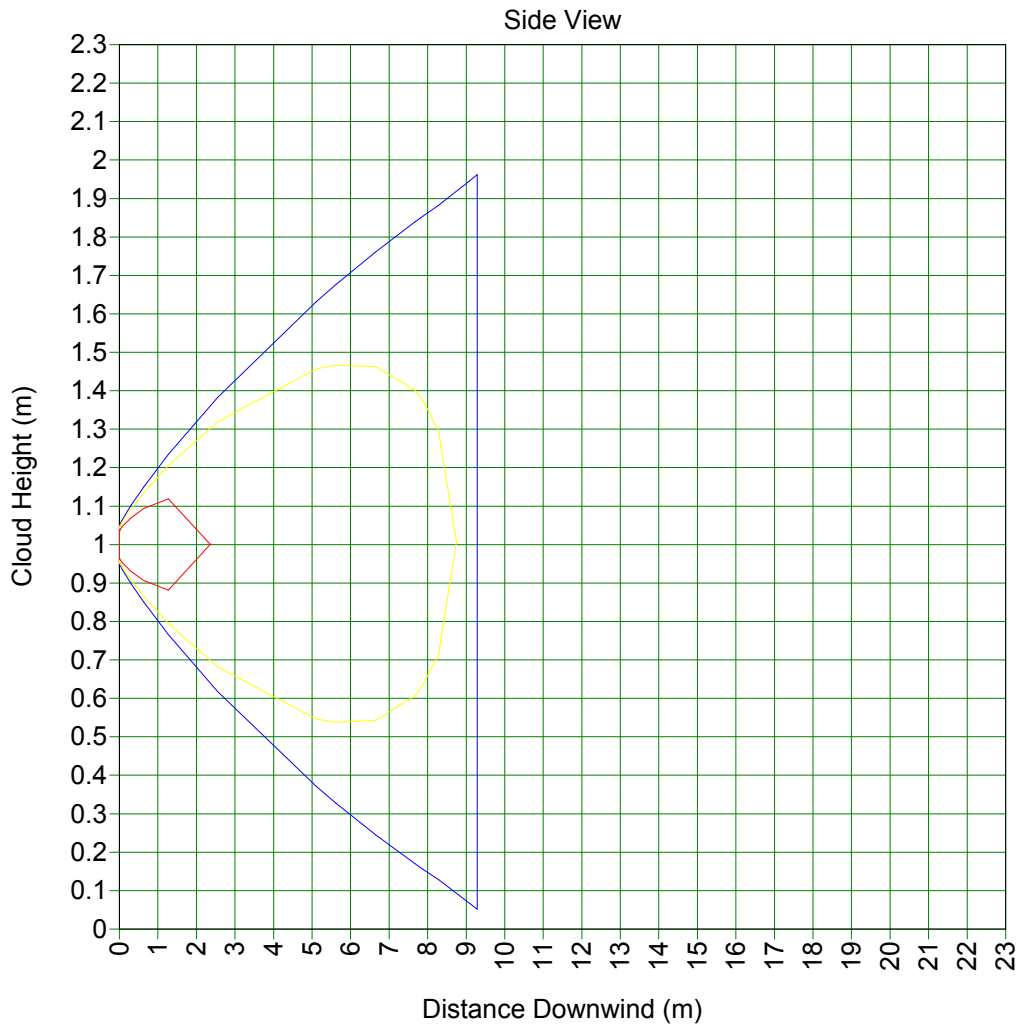

# SUMMARY REPORT

Unique Audit Number: 65.784



Study Folder: 70977-Fase 1-Ip20

Phast 6.6

70977-Fase 1-Ip20

Air-Cooler

10mm

## Base Case

CASE Name: Data

Path: \70977-Fase 1-Ip20\Air-Cooler\10mm

## User-Defined Data

### Material

Material Identifier	METHANE
Type of Vessel	Pressurized Gas
Pressure Specification	Pressure specified
Storage Pressure - gauge	100 bar
Temperature	45 degC
Mass Inventory	1000 kg

### Scenario

Scenario Type	Leak
Phase to be Released	Vapor
Hole Diameter	10 mm
Building Wake Effect	None

### Location

[Elevation	1 m]
Concentration of Interest	2.2E4 ppm
Averaging time associated with Concentration	Flammable
Distances for Radiation Modeling and Dispersion Scope(1)	50 m
Distances for Radiation Modeling and Dispersion Scope(2)	250 m
Distances for Radiation Modeling and Dispersion Scope(3)	500 m
Use ERPG averaging time	ERPG not selected
Use IDLH averaging time	IDLH not selected
Use STEL averaging time	STEL not selected
Supply a user defined averaging time	Not supplied

### Bund

Status of Bund	No bund present
[Type of Bund Surface	Concrete]
[Bund Height	0 m]
[Bund Failure Modeling	Bund cannot fail]

### Indoor/Outdoor

Location of release	Open air release
Outdoor Release Direction	Horizontal

### Flammable

Explosion Method	TNT
Jet Fire Method	API Model

### Dispersion

Late Ignition Location	No ignition location
Mass Inventory of material to Disperse	1000 kg

# SUMMARY REPORT

Unique Audit Number: 65.784



Study Folder: 70977-Fase 1-Ip20

Phast 6.6

## Fireball Parameters

[Mass Modification Factor	3]
[Calculation method for fireball	DNV Recommended]
[TNO model flame temperature	1727 degC]

## Toxic Parameters

[Indoor Calculations	Unselected]
[Wind Dependent Exchange Rate	Case Specified]
[Building Exchange Rate	4 /hr]
[Tail Time	1800 s]
[Set averaging time equal to exposure time	Use a fixed averaging time]
[Cut-off fraction of toxic load for exposure time calculation	0.05 fraction]
[Cut-off concentration for exposure time calculations	0 fraction]

## Geometry

Shape	Point
Dimension	2D
System	Absolute
East(1)	0 m
North(1)	0 m

Path: \70977-Fase 1-Ip20\Air-Cooler\10mm

## Discharge Data

### User-Defined Quantities

Material	METHANE
Temperature	45,00 degC
Pressure	101,01 bar
Inventory	1.000,00 kg
Scenario	Leak
Fixed Duration	n/a s

### Calculated Quantities

Weather: Global Weathers\Category 2/F

Mass Flow of Air (Vent from Vapor Space Only) n/a

#### Average Values for Segment Number 1

Liquid Fraction	0,00 fraction
Final Temperature	-53,30 degC
Final Velocity	500,00 m/s
Droplet Diameter	0,00 um

#### Continuous Release Data:

Mass Flowrate	1.23263E+000 kg/s
Release Duration	811,27 s
Orifice Velocity	414,70 m/s
Exit Pressure	53,38 bar
Exit Temperature	-3,26 degC
Discharge Coefficient	0,87
Expanded Radius	0,03 m

# SUMMARY REPORT

Study Folder: 70977-Fase 1-1p20

Unique Audit Number: 65.784

Phast 6.6



Weather: Global Weathers\Category 5/D

Mass Flow of Air (Vent from Vapor Space Only) n/a

**Average Values for Segment Number 1**

Liquid Fraction 0,00 fraction

Final Temperature -53,30 degC

Final Velocity 500,00 m/s

Droplet Diameter 0,00 um

Continuous Release Data:

Mass Flowrate 1.23263E+000 kg/s

Release Duration 811,27 s

Orifice Velocity 414,70 m/s

Exit Pressure 53,38 bar

Exit Temperature -3,26 degC

Discharge Coefficient 0,87

Expanded Radius 0,03 m

# SUMMARY REPORT

Study Folder: 70977-Fase 1-1p20

Unique Audit Number: 65.784

Phast 6.6



## Consequence Results

### Distance to Concentration Results

Path: \70977-Fase 1-1p20\Air-Cooler\10mm

The height for user defined concentrations is the user defined height 0 m  
All toxic results are reported at the toxic effect height 0 m  
All flammable results are reported at the cloud centreline height

Concentration(ppm)	Averaging Time		Category 2/F	Distance (m)	Category 5/D
User Conc (22000)	18.75	s	18.7912	18.7912	No Hazard
UFL (165000)	18.75	s	2.3603	2.3603	2.2661
LFL (44000)	18.75	s	8.74715	8.74715	6.98254
LFL Frac (22000)	18.75	s	22.6457	22.6457	15.3311

Concentration(ppm)	Averaging Time		Category 2/F	Heights (m) for above distances	Category 5/D
User Conc (22000)	18.75	s	0	0	0
UFL (165000)	18.75	s	1.0002	1.0002	1.00018
LFL (44000)	18.75	s	1.00604	1.00604	1.00303
LFL Frac (22000)	18.75	s	1.14306	1.14306	1.0243

# SUMMARY REPORT

Study Folder: 70977-Fase 1-Ip20

Unique Audit Number: 65.784

Phast 6.6



## Concentration At Distance Results

Path: \70977-Fase 1-Ip20\Air-Cooler\10mm

The height for user defined concentrations is the user defined height 0 m  
All toxic results are reported at the toxic effect height 0 m  
All flammable results are reported at the cloud centreline height

Distance		Conc.(ppm) at Flammable Avg. Time of 18.75 s	
		Category 2/F	Category 5/D
50	m	12295.4	9051.6
250	m	1069.81	601.412
500	m	525.038	170.055

Distance		Heights (m) for above concentrations	
		Category 2/F	Category 5/D
50	m	2.91029	1.50973
250	m	16.4225	4.37881
500	m	26.8268	5.56529

Distance		Conc.(ppm) at Core Avg. Time of 18.75 s	
		Category 2/F	Category 5/D
50	m	12295.4	9051.6
250	m	1069.81	601.412
500	m	525.038	170.055

Distance		Heights (m) for above concentrations	
		Category 2/F	Category 5/D
50	m	2.91029	1.50973
250	m	16.4225	4.37881
500	m	26.8268	5.56529

## Jet Fire Hazard

Path: \70977-Fase 1-Ip20\Air-Cooler\10mm

Jet fire method used: API

	Category 2/F	Category 5/D
Jet Fire Status	Hazard	Hazard
Flame Direction	Horizontal	Horizontal

## Radiation Effects: Jet Fire Ellipse

Path: \70977-Fase 1-Ip20\Air-Cooler\10mm

This table gives the distances to the specified radiation levels for each jet fire listed in the above hazard table

			Distance (m)	
			Category 2/F	Category 5/D
Radiation Level	12.5	kW/m2	17.5807	17.5807
Radiation Level	7	kW/m2	18.335	18.335
Radiation Level	5	kW/m2	18.8662	18.8662
Radiation Level	3	kW/m2	19.926	19.926

# SUMMARY REPORT

Unique Audit Number: 65.784



Study Folder: 70977-Fase 1-Ip20

Phast 6.6

## Radiation Effects: Jet Fire Distance

Path: \70977-Fase 1-Ip20\Air-Cooler\10mm

		Radiation Level (kW/m2)	
		Category 2/F	Category 5/D
Distance Of Interest 50	m	0.0643869	0.0643869
Distance Of Interest 250	m	0.00131573	0.00131573
Distance Of Interest 500	m	0.000277485	0.000277485

## Flash Fire Envelope

Path: \70977-Fase 1-Ip20\Air-Cooler\10mm

All flammable results are reported at the cloud centreline height

		Distance (m)	
		Category 2/F	Category 5/D
Furthest Extent	22000 ppm	22.6457	15.3311
Furthest Extent	44000 ppm	8.74715	6.98254

		Heights (m) for above distances	
		Category 2/F	Category 5/D
Furthest Extent	22000 ppm	1.14306	1.0243
Furthest Extent	44000 ppm	1.00604	1.00303



# SUMMARY REPORT

Unique Audit Number: 65.784



Study Folder: 70977-Fase 1-Ip20

Phast 6.6

## Explosion Effects: Late Ignition

Path: \70977-Fase 1-Ip20\Air-Cooler\10mm

Explosion Model Used : TNT

Explosion Location Criterion: Cloud Front (LFL Fraction)

All distances are measured from the Source

All flammable results are reported at the cloud centreline height

			Maximum Distance (m) at Overpressure Level	
			Category 2/F	Category 5/D
Overpressure	0.02068	bar	37.5585	25.1735
Overpressure	0.1379	bar	24.5463	13.9288
Overpressure	0.2068	bar	23.5178	13.04

			Supplementary Data at 0.02068 bar	
			Category 2/F	Category 5/D
Supplied Flammable Mass		kg	0.138909	0.0896447
Used Flammable Mass		kg	0.138909	0.0896447
Overpressure Radius		m	17.5585	15.1735
Distance to:				
- Ignition Source		m	20	10
- Cloud Front/Centre		m	20	10
- Explosion Centre		m	20	10

			Supplementary Data at 0.1379 bar	
			Category 2/F	Category 5/D
Supplied Flammable Mass		kg	0.138909	0.0896447
Used Flammable Mass		kg	0.138909	0.0896447
Overpressure Radius		m	4.54633	3.92879
Distance to:				
- Ignition Source		m	20	10
- Cloud Front/Centre		m	20	10
- Explosion Centre		m	20	10

			Supplementary Data at 0.2068 bar	
			Category 2/F	Category 5/D
Supplied Flammable Mass		kg	0.138909	0.0896447
Used Flammable Mass		kg	0.138909	0.0896447
Overpressure Radius		m	3.51785	3.04001
Distance to:				
- Ignition Source		m	20	10
- Cloud Front/Centre		m	20	10
- Explosion Centre		m	20	10

			Overpressures (bar gauge) at Distances	
			Category 2/F	Category 5/D
Distance	50	m	0.0108945	0.0067859
Distance	250	m	0.00168391	0.00148329
Distance	500	m	0.00107228	0.001

			Supplementary Data at 50 m	
			Category 2/F	Category 5/D
Supplied Flammable Mass		kg	0.138909	0.0896447

# SUMMARY REPORT

Study Folder: 70977-Fase 1-Ip20

Unique Audit Number: 65.784

Phast 6.6



Used Flammable Mass	kg	0.138909	0.0896447
		Supplementary Data at 250 m	
		Category 2/F	Category 5/D
Supplied Flammable Mass	kg	0.138909	0.0896447
Used Flammable Mass	kg	0.138909	0.0896447
		Supplementary Data at 500 m	
		Category 2/F	Category 5/D
Supplied Flammable Mass	kg	0.138909	0.0896447
Used Flammable Mass	kg	0.138909	0.0896447

## Weather Conditions

Path: \70977-Fase 1-Ip20\Air-Cooler\10mm

		Category 2/F	Category 5/D
Wind Speed	m/s	2	5
Pasquill Stability		F	D
Surface Roughness Length	mm	1000	1000
Surface Roughness Parameter		0.173718	0.173718
Atmospheric Temperature	degC	25	25
Surface Temperature	degC	25	25
Relative Humidity	fraction	0.75	0.75