


	DISTANZA DI BATTUTA - RITEGNI TRASV.	DISTANZA DI BATTUTA - RITEGNI LONG.	ESCURSIONE GIUNTI	VARCO SOLETTA
	[mm]	[mm]	[mm]	[mm]
SpA	5+/-2	296	296	306
SPB	5+/-2	287	287	297
Pile	170	/	/	/

LEGGENDA

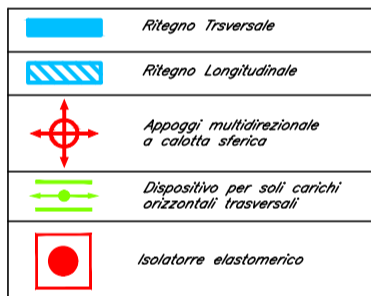

SPALLA A									
trave sx					trave dx				
MULTI					GUIDA				
Vert.[kN]	Long.[kN]	Trasv.[kN]	Vert.[kN]	Long.[kN]	Trasv.[kN]	Vert.[kN]	Long.[kN]	Trasv.[kN]	Vert.[kN]
COMBINAZIONI SLU	5567.1	0.0	0.0	0.0	0.0	4769.6	0.0	0.0	0.0
COMB. SLU Nmax	1109.6	0.0	0.0	0.0	0.0	415.0	0.0	0.0	0.0
COMB. SLU Nmin	1896.2	0.0	0.0	0.0	0.0	1579.0	0.0	0.0	0.0
COMB. SLU Long.max	1896.2	0.0	0.0	0.0	0.0	1439.5	1579.0	0.0	0.0
COMB. SLU Long.min	1896.2	0.0	0.0	0.0	0.0	1341.7	1579.0	0.0	0.0
COMB. SLU Trasv.max	1896.2	0.0	0.0	0.0	0.0	1579.0	0.0	0.0	0.0
COMB. SLU Trasv.min	1896.2	0.0	0.0	0.0	0.0	1579.0	0.0	0.0	0.0
COMBINAZIONI SLV	1291.4	0.0	0.0	0.0	0.0	1402.5	818.5	0.0	0.0
COMB. SLV X max	1126.9	0.0	0.0	0.0	0.0	187.3	635.4	0.0	0.0
COMB. SLV Y max	2556.3	0.0	0.0	0.0	0.0	-1040.2	1953.4	0.0	0.0
COMB. SLV Z max	2497.2	0.0	0.0	0.0	0.0	-1361.5	1964.5	0.0	0.0
COMB. SLV X min	2661.7	0.0	0.0	0.0	0.0	-1832.1	2147.6	0.0	0.0
COMB. SLV Y min	1232.3	0.0	0.0	0.0	0.0	1081.1	829.7	0.0	0.0
COMB. SLV Z min	1232.3	0.0	0.0	0.0	0.0	1081.1	829.7	0.0	0.0

SPALLA B									
trave sx					trave dx				
MULTI					GUIDA				
Vert.[kN]	Long.[kN]	Trasv.[kN]	Vert.[kN]	Long.[kN]	Trasv.[kN]	Vert.[kN]	Long.[kN]	Trasv.[kN]	Vert.[kN]
COMBINAZIONI SLU	4749.8	0.0	0.0	0.0	0.0	4399.9	4147.5	0.0	0.0
COMB. SLU Nmax	958.3	0.0	0.0	0.0	0.0	439.9	375.5	0.0	0.0
COMB. SLU Nmin	1477.6	0.0	0.0	0.0	0.0	439.9	1576.9	0.0	0.0
COMB. SLU Long.max	1477.6	0.0	0.0	0.0	0.0	439.9	1576.9	0.0	0.0
COMB. SLU Long.min	1477.6	0.0	0.0	0.0	0.0	439.9	1576.9	0.0	0.0
COMB. SLU Trasv.max	1477.6	0.0	0.0	0.0	0.0	1576.9	0.0	0.0	0.0
COMB. SLU Trasv.min	1477.6	0.0	0.0	0.0	0.0	1576.9	0.0	0.0	0.0
COMBINAZIONI SLV	856.1	0.0	0.0	0.0	0.0	1262.1	445.7	0.0	0.0
COMB. SLV X max	900.4	0.0	0.0	0.0	0.0	1209.6	467.2	0.0	0.0
COMB. SLV Y max	2328.9	0.0	0.0	0.0	0.0	-627.6	1886.9	0.0	0.0
COMB. SLV Z max	2329.5	0.0	0.0	0.0	0.0	-1267.0	1972.4	0.0	0.0
COMB. SLV X min	2295.2	0.0	0.0	0.0	0.0	1213.8	1950.8	0.0	0.0
COMB. SLV Y min	866.7	0.0	0.0	0.0	0.0	623.3	551.1	0.0	0.0
COMB. SLV Z min	866.7	0.0	0.0	0.0	0.0	623.3	551.1	0.0	0.0

PILA 1					
trave sx			trave dx		
ISOLATORE			ISOLATORE		
Vert.[kN]	Long.[kN]	Trasv.[kN]	Vert.[kN]	Long.[kN]	Trasv.[kN]
COMBINAZIONI SLU	10898.5	59.6	159.6	11607.9	-117.7
COMB. SLU Nmax	3479.3	-88.7	-160.7	4068.5	94.9
COMB. SLU Nmin	7681.5	1036.5	-130.6	7577.0	974.3
COMB. SLU Long.max	5334.4	-1416.2	106.2	6190.6	-1338.1
COMB. SLU Long.min	6329.6	273.5	396.9	8862.1	-310.1
COMB. SLU Trasv.max	6385.0	-471.0	-404.1	5373.5	-500.8
COMB. SLU Trasv.min	3845.1	1217.3	334.0	4285.9	1184.9
COMBINAZIONI SLV	3708.9	817.7	435.6	4187.2	814.9
COMB. SLV X max	5605.1	-733.0	-204.8	6460.3	-716.2
COMB. SLV Y max	5178.7	-1315.4	-335.1	5910.8	-1279.6
COMB. SLV Z max	5314.9	-915.8	-436.7	6009.5	-909.7
COMB. SLV X min	3418.7	634.9	203.8	3706.4	621.5
COMB. SLV Y min					
COMB. SLV Z min					

PILA 2					
trave sx			trave dx		
ISOLATORE			ISOLATORE		
Vert.[kN]	Long.[kN]	Trasv.[kN]	Vert.[kN]	Long.[kN]	Trasv.[kN]
COMBINAZIONI SLU	10383.3	-83.6	270.0	11522.7	-62.9
COMB. SLU Nmax	2702.8	-435.2	-327.5	3409.0	-84.5
COMB. SLU Nmin	4485.8	799.4	-204.8	5209.1	-773.4
COMB. SLU Long.max	6020.7	-1178.2	184.8	7047.0	-1148.1
COMB. SLU Long.min	5993.4	15.1	589.8	8394.5	44.6
COMB. SLU Trasv.max	5641.3	-259.6	-584.3	5069.8	-286.9
COMB. SLU Trasv.min	3318.2	1016.6	497.7	4026.1	994.6
COMBINAZIONI SLV	3138.3	637.3	674.7	3850.6	627.2
COMB. SLV X max	5169.5	-632.3	-294.1	5923.5	-623.7
COMB. SLV Y max	4872.1	-1164.3	-487.7	5540.6	-1141.1
COMB. SLV Z max	5052.1	-785.2	-664.7	5716.1	-773.8
COMB. SLV X min	3020.8	484.4	304.1	3643.2	477.1
COMB. SLV Y min					
COMB. SLV Z min					

PILA 3					
trave sx			trave dx		
ISOLATORE			ISOLATORE		
Vert.[kN]	Long.[kN]	Trasv.[kN]	Vert.[kN]	Long.[kN]	Trasv.[kN]
COMBINAZIONI SLU	12988.3	18.1	316.6	12755.8	-182.7
COMB. SLU Nmax	4081.0	-145.3	-416.6	3915.9	49.8
COMB. SLU Nmin	5526.5	599.0	-209.5	6107.0	617.3
COMB. SLU Long.max	8773.4	-799.0	32.0	7551.9	-830.1
COMB. SLU Long.min	5836.7	43.6	656.3	7004.4	-48.3
COMB. SLU Trasv.max	9418.1	-62.9	-741.6	7708.0	-83.4
COMB. SLU Trasv.min	4660.0	898.6	552.2	4497.1	900.6
COMBINAZIONI SLV	4411.4	551.6	806.3	4235.8	549.4
COMB. SLV X max	6587.4	-477.1	-395.5	6349.8	-483.7
COMB. SLV Y max	6300.1	-969.6	-606.3	6092.0	-973.7
COMB. SLV Z max	6548.7	-622.6	-860.4	6353.3	-622.5
COMB. SLV X min	4372.7	406.1	342.4	4239.2	410.5
COMB. SLV Y min					
COMB. SLV Z min					

PILA 4					
trave sx			trave dx		
ISOLATORE			ISOLATORE		
Vert.[kN]	Long.[kN]	Trasv.[kN]	Vert.[kN]	Long.[kN]	Trasv.[kN]
COMBINAZIONI SLU	13064.5	-8.4	307.6	13321.0	-120.9
COMB. SLU Nmax	4373.5	-68.3	-452.6	4267.6	20.2
COMB. SLU Nmin	5930.9	440.4	-74.8	6892.8	471.7
COMB. SLU Long.max	8652.9	-519.7	16.7	9042.5	-572.0
COMB. SLU Long.min	6009.4	55.9	694.5	7549.4	-48.0
COMB. SLU Trasv.max	9641.8	-28.1	-789.6	7939.1	-43.7
COMB. SLU Trasv.min	4930.3	786.9	550.1	4796.3	801.5
COMBINAZIONI SLV	4680.7	482.3	849.9	4557.0	484.1
COMB. SLV X max	6828.4	-385.0	-428.9	6748.7	-397.8
COMB. SLV Y max	6414.0	-835.8	-605.2	6378.2	-854.1
COMB. SLV Z max	6653.5	-531.2	-905.0	6618.1	-536.7
COMB. SLV X min	4505.8	336.1	377.8	4426.4	345.2
COMB. SLV Y min					
COMB. SLV Z min					

PILA 5					
trave sx			trave dx		
ISOLATORE			ISOLATORE		
Vert.[kN]	Long.[kN]	Trasv.[kN]	Vert.[kN]	Long.[kN]	Trasv.[kN]
COMBINAZIONI SLU	13530.2	20.3	340.7	14042.9	-101.6
COMB. SLU Nmax	4721.1	-89.2	-491.5	4714.7	54.1
COMB. SLU Nmin	6418.4	343.8	27.9	7550.5	367.3
COMB. SLU Long.max	9164.2	-405.0	81.4	9583.5	-431.3
COMB. SLU Long.min	8813.4	0.5	714.6	10432.1	3.8
COMB. SLU Trasv.max	7780.1	-206.3	-883.8	6046.2	-231.3
COMB. SLU Trasv.min	5284.2	753.9	513.5	5211.9	764.6
COMBINAZIONI SLV	5065.1	529.3	823.0	4967.0	519.0
COMB. SLV X max	7299.7	-366.7	-438.7	7287.6	-372.6
COMB. SLV Y max	6782.0	-793.9	-568.8	6805.1	-806.2
COMB. SLV Z max	7001.2	-569.3	-878.3	7050.0	-560.7
COMB. SLV X min	4766.6	326.7	383.4	4729.3	330.9
COMB. SLV Y min					
COMB. SLV Z min					

PILA 6					
trave sx			trave dx		
ISOLATORE			ISOLATORE		
Vert.[kN]	Long.[kN]	Trasv.[kN]	Vert.[kN]	Long.[kN]	Trasv.[kN]
COMBINAZIONI SLU	12952.9	123.3	572.7	13143.9	-96.1
COMB. SLU Nmax	3558.8	-105.5	-719.7	3556.0	141.7
COMB. SLU Nmin	8209.1	372.7	35.8	8471.8	378.6
COMB. SLU Long.max	5705.2	-354.2	-151.8	6773.0	-357.9
COMB. SLU Long.min	8301.4	110.5	589.4	8873.1	119.5
COMB. SLU Trasv.max	6467.3	-194.1	-1090.7	5988.0	-202.9
COMB. SLU Trasv.min	4474.5	918.2	703.8	4398.2	921.2
COMBINAZIONI SLV	4249.1	755.4	1004.5	4167.8	736.0
COMB. SLV X max	6788.4	-407.6	-561.2	6625.1	-403.4
COMB. SLV Y max	6350.8	-893.1	-770.0	6184.0	-894.5
COMB. SLV Z max	6576.2	-730.3	-1070.6	6414.3	-709.2
COMB. SLV X min	4036.9	432.7	495.1	3957.0	430.1
COMB. SLV Y min					
COMB. SLV Z min					

PILA 7					
trave sx			trave dx		
ISOLATORE			ISOLATORE		
Vert.[kN]	Long.[kN]	Trasv.[kN]	Vert.[kN]	Long.[kN]	Trasv.[kN]
COMBINAZIONI SLU	17469.2	-77.6	499.7	16008.7	-375.0
COMB. SLU Nmax	6101.3	-296.5	-737.8	5142.3	7.9
COMB. SLU Nmin	9066.6	237.0	581.8	7711.8	247.2
COMB. SLU Long.max	11352.6	-602.5	-749.1	11338.2	-607.4
COMB. SLU Long.min	8791.6	16.4	847.7	8548.9	31.0
COMB. SLU Trasv.max	12718.3	-391.7	-1083.6	10100.6	-387.0
COMB. SLU Trasv.min	6623.9	747.3	875.1	5479.7	749.2
COMBINAZIONI SLV	6463.4	686.3	1014.3	6319.5	673.1
COMB. SLV X max	9114.3	-558.6	-624.2	8188.2	-549.0
COMB. SLV Y max	9229.6	-1008.0	-983.6		