




PROGETTO DEFINITIVO DELL'IMPIANTO AGRIVOLTAICO DELLA POTENZA DI PICCO DI 360MW CON SISTEMA DI ACCUMULO DI CAPACITA' PARI A 82,5MWH E RELATIVE OPERE DI CONNESSIONE ALLA RETE RTN, DA REALIZZARSI NEL COMUNE DI SASSARI NELLE FRAZIONI DI "PALMADULA, LA CORTE, CANAGLIA, LI PIANI, SAN GIORGIO, SCALA ERRE"

PROGETTO DEFINITIVO

COMMITTENTE:

**PALMADULA
SOLAR S.R.L.** 

PROGETTISTA:

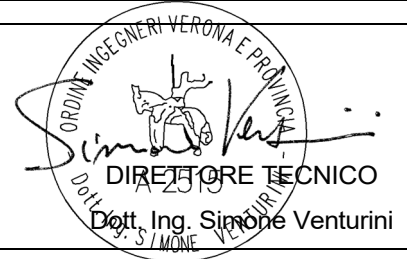

TITOLO ELABORATO:

BROCHURE SISTEMA STORAGE

ELABORATO n°:
BI028F-D-PAL-SH-06-r00

NOME FILE:

SCALA: ----

DATA: AGOSTO 2023

REVISIONE	N.	DATA	DESCRIZIONE	ELABORATO	CONTROLLATO	APPROVATO
	00		Agosto 2023	Prima Emissione	E. Guiot	M. Sandri
01						
02						
03						
04						

ST2752UX

Liquid Cooling Energy Storage System

Preliminary



LOW COSTS

- Highly integrated ESS for easy transportation and O&M
- All pre-assembled, no battery module handling on site
- 8 hour installation to commission, drop on a pad and make electrical connections



SAFE AND RELIABLE

- Integrated DC/DC converters actively limit fault current
- DC electric circuit safety management includes fast breaking and anti-arc protection
Multi level battery protection layers formed by discreet standalone systems offer impeccable safety



EFFICIENT AND FLEXIBLE

- Intelligent liquid cooling ensures higher efficiency and longer battery cycle life
- Modular design supports parallel connection and easy system expansion
- IP54 outdoor cabinet and optional C5 anti-corrosion



SMART AND ROBUST

- Fast state monitoring and faults record enables pre-alarm and faults location
- Integrated battery performance monitoring and logging



Type designation	ST2752UX
Battery Data	
Cell type	LFP
Battery capacity (BOL)	2752 kWh
System output voltage range	1160 ~ 1500 V
General Data	
Dimensions of battery unit (W * H * D)	9340*2600*1730mm
Weight of battery unit	26,400kg
Degree of protection	IP54
Operating temperature range	-30 to 50 °C (> 45 °C derating)
Relative humidity	0 – 95 % (non-condensing)
Max. working altitude	3000 m
Cooling concept of battery chamber	Liquid cooling
Fire safety	Fused sprinkler heads, NFPA 69 explosion prevention and ventilation IDLH gases
Communication interfaces	RS485, Ethernet
Communication protocols	Modbus RTU, Modbus TCP
Compliance	CE, IEC 62477-1, IEC 61000-6-2, IEC 61000-6-4, IEC 62619
2 HOURS APPLICATION-ST2752UX*4-5000UD-MV	
BOL kWh (DC/AC LV Side)	11,008 kWh DC / 10,379 kWh AC
ST2752UX Quantity	4
PCS Model	SC5000UD-MV
4 HOURS APPLICATION-ST2752UX*8-5000UD-MV	
BOL kWh (DC/AC LV Side)	22,016 kWh / 21,448 kWh
ST2752UX Quantity	8
PCS Model	SC5000UD-MV
Grid Connection Data	
Max.THD of current	< 3 % (at nominal power)
DC component	< 0.5 % (at nominal power)
Power factor	> 0.99 (at nominal power)
Adjustable power factor	1.0 leading – 1.0 lagging
Nominal grid frequency	50 / 60 Hz
Grid frequency range	45 – 55 Hz / 55 – 65 Hz
Transformer	
Transformer rated power	5,000 kVA
LV/MV voltage	0.9 kV / 33 kV
Transformer cooling type	ONAN (Oil Natural Air Natural)
Oil type	Mineral oil (PCB free) or degradable oil on request



SC2750UD-MV/SC3150UD-MV/ SC3450UD-MV

Power Conversion System



HIGH YIELD

- Advanced three-level technology, max. efficiency 99%
- Effective forced air cooling, no derating up to 45°C
- Wide DC voltage operation window, full power operation at 1500V



SMART O&M

- Modular design, easy for maintenance
- IP65 protection degree, easy for outdoor installation
- C5 anti-corrosion degree, adjust to applications close to the sea



FLEXIBLE APPLICATION


- Bidirectional power conversion system with full four-quadrant operation
- Compatible with high voltage battery system, low system cost
- Battery charge & dis-charge management and black start function integrated



GRID SUPPORT

- Compliant with CE, IEC 62477, IEC 61000 and grid regulations
- Fast active/reactive power response
- L/HVRT, FRT, soft start/stop, specified power factor control and reactive power support

CIRCUIT DIAGRAM

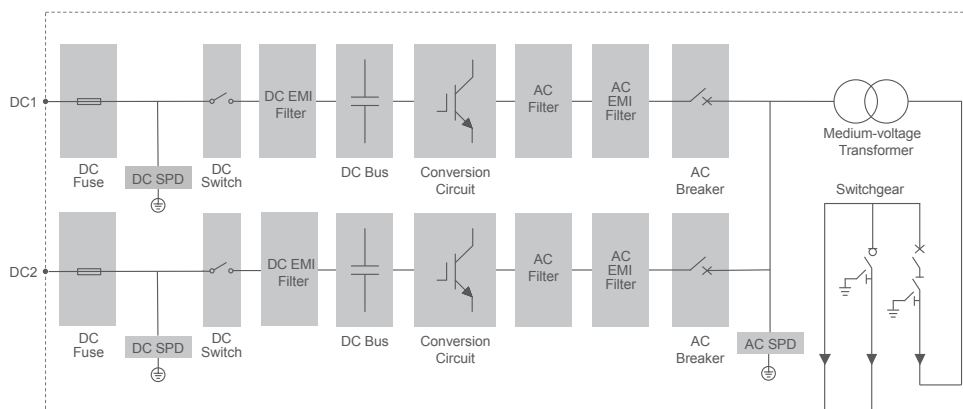

Type Designation	SC2750UD-MV	SC3150UD-MV	SC3450UD-MV
DC side			
Max. DC voltage		1500 V	
Min. DC voltage	800 V	915 V	1000 V
DC voltage range	800 – 1500 V	915 – 1500 V	1000 – 1500 V
Max. DC current		1935 A * 2	
No. of DC inputs		2	
AC side (Grid)			
AC output power	2750 kVA @ 45 °C 3025 kVA @ 30 °C	3150 kVA @ 45 °C 3465 kVA @ 30 °C	3450 kVA @ 45 °C 3795 kVA @ 30 °C
Converter port max. AC output current		1587 A*2	
Converter port nominal AC voltage	550 V	630 V	690 V
Converter port AC voltage range	484 – 605 V	554 – 693 V	607 – 759 V
Nominal grid frequency / Grid frequency range		50 Hz / 45 – 55 Hz, 60 Hz / 55 – 65 Hz	
Harmonic (THD)		< 3 % (at nominal power)	
Power factor at nominal power / Adjustable power factor		>0.99 / 1 leading – 1 lagging	
Adjustable reactive power range		-100 % – 100 %	
Feed-in phases / AC connection		3 / 3	
AC side (Off-Grid)			
Converter port nominal AC voltage	550 V	630 V	690 V
Converter port AC voltage range	484 – 605 V	554 – 693 V	607 – 759 V
AC voltage Distortion		< 3 % (Linear load)	
DC voltage component		< 0.5 % Un (Linear balance load)	
Unbalance load Capacity		100%	
Nominal frequency / Frequency range		50 Hz / 45 – 55 Hz, 60 Hz / 55 – 65 Hz	
Efficiency			
Converter max. efficiency		99%	
Transformer			
Transformer rated power	2750 kVA	3150 kVA	3450 kVA
Transformer max. power	3025 kVA	3465 kVA	3795 kVA
LV / MV voltage	0.55 kV / 20 – 35 kV	0.63 kV / 20 – 35 kV	0.69 kV / 20 – 35 kV
Transformer vector		Dy11	
Transformer cooling type		ONAN	
Oil type		Mineral oil (PCB free) or degradable oil on request	
Protection			
DC input protection		Load break switch + fuse	
Converter output protection		Circuit breaker	
AC output protection		Circuit breaker	
Surge protection		DC Type II / AC Type II	
Grid monitoring / Ground fault monitoring		Yes / Yes	
Insulation monitoring		Yes	
Overheat protection		Yes	
General Data			
Dimensions (W*H*D)		6058*2896*2438 mm	
Weight		16000 kg	
Degree of protection		IP54 (Converter: IP65)	
Operating ambient temperature range		-35 to 60 °C (> 45 °C derating)	
Allowable relative humidity range		0 – 100 %	
Cooling method		Temperature controlled forced air cooling	
Max. operating altitude		4000 m (> 2000 m derating)	
Display		LED, WEB HMI	
Communication		RS485, CAN, Ethernet	
Compliance		CE, IEC 62477-1, IEC 61000-6-2, IEC 61000-6-4	
Grid support		L/HVRT, FRT, active & reactive power control and power ramp rate control, Volt-var, Volt-watt, Frequency-watt	

