

Comune di : ROTELLO

Provincia di : CAMPOBASSO

Regione : MOLISE



PROponente



SONNEDIX SANTA CHIARA srl
Via Ettore da Sonnaz, 19
10121 TORINO (TO)
P.I. 12214330016

Opera

PROGETTO DEFINITIVO

IMPIANTO DI PRODUZIONE DI ENERGIA ELETTRICA DA FONTE
RINNOVABILE AGROFOTOVOLTAICA DI POTENZA NOMINALE PARI
A 63.628,80 kW_p E POTENZA DI IMMISSIONE PARI A 62.698,00 KW
E DELLE RELATIVE OPERE DI CONNESSIONE ALLA RETE RTN

"VERTICCHIO"

OGGETTO

TITOLO ELABORATO :

BROCHURE MODULI FOTOVOLTAICI

DATA : 20 novembre 2020

N°/CODICE ELABORATO :

EL 039

SCALA : -----

Tipologia : EL (ELABORATI)

I TECNICI

PROGETTISTI:



EDILSAP s.r.l.
Via di Selva Candida, 452
00166 ROMA
Ing. Fernando SONNINO
Project Manager


TIMBRI E FIRME:



01	201901325	Emissione per Progetto Definitivo - Richiesta V.I.A. e A.U.	EDILSAP srl	Ing. Fernando Sonnino	Ing. Fernando Sonnino
00	201901325	Emissione per Progetto Definitivo - Richiesta V.I.A. e A.U.	EDILSAP srl	Ing. Fernando Sonnino	Ing. Fernando Sonnino
N° REVISIONE	Cod. STMG	OGGETTO DELLA REVISIONE	ELABORAZIONE	VERIFICA	APPROVAZIONE

THE Vertex

BIFACIAL DUAL GLASS MONOCRYSTALLINE MODULE

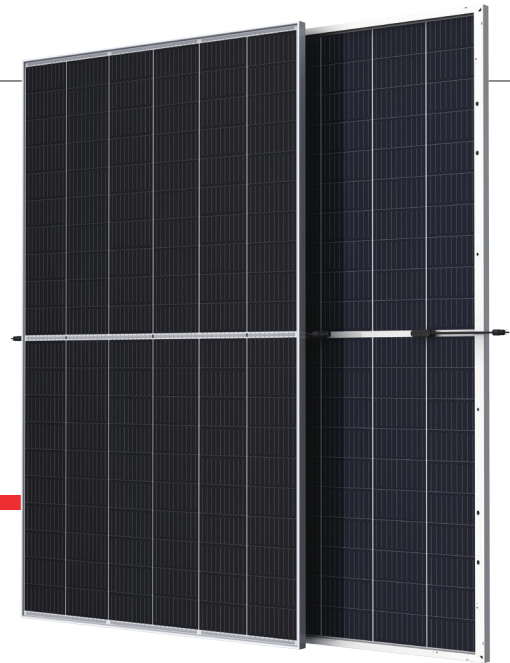

600W

MAXIMUM POWER OUTPUT

21.2%

MAXIMUM EFFICIENCY

0~+5W

POSITIVE POWER TOLERANCE

PRODUCTS

TSM-DEG20C.20

POWER RANGE

580-600W



High customer value

- Lower LCOE (Levelized Cost Of Energy), reduced BOS (Balance of System) cost, shorter payback time
- Lowest guaranteed first year and annual degradation; extended 30-year warranty
- Designed for compatibility with existing mainstream system components
- Higher return on Investment



High power up to 600W

- Up to 21.2% module efficiency with high density interconnect technology
- Multi-busbar technology for better light trapping effect, lower series resistance and improved current collection



High reliability

- Minimized micro-cracks with innovative non-destructive cutting technology
- Ensured PID resistance through cell process and module material control
- Resistant to harsh environments such as salt ammonia, sand, high temperature and high humidity areas
- Mechanical performance up to 5400 Pa positive load and 2400 Pa negative load
- Certificated to fire class A



High energy yield

- Excellent IAM (Incident Angle Modifier) and low irradiation performance, validated by 3rd party certifications
- The unique design provides optimized energy production under inter-row shading conditions
- Lower temperature coefficient (-0.34%) and operating temperature
- Up to 25% additional power gain from back side depending on albedo

Founded in 1997, Trina Solar is the world's leading total solution provider for solar energy. With local presence around the globe, Trina Solar is able to provide exceptional service to each customer in each market and deliver our innovative, reliable products with the backing of Trina as a strong, bankable brand. Trina Solar now distributes its PV products to over 100 countries all over the world. We are committed to building strategic, mutually beneficial collaborations with installers, developers, distributors and other partners in driving smart energy together.

Comprehensive Products and System Certificates

IEC61215/IEC61730/IEC61701/IEC62716

ISO 9001: Quality Management System


ISO 14001: Environmental Management System


ISO14064: Greenhouse Gases Emissions Verification

ISO45001: Occupational Health and Safety Management System




Trina Solar's Vertex Bifacial Dual Glass Performance Warranty


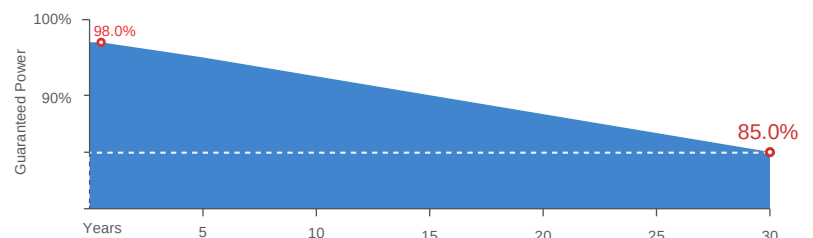


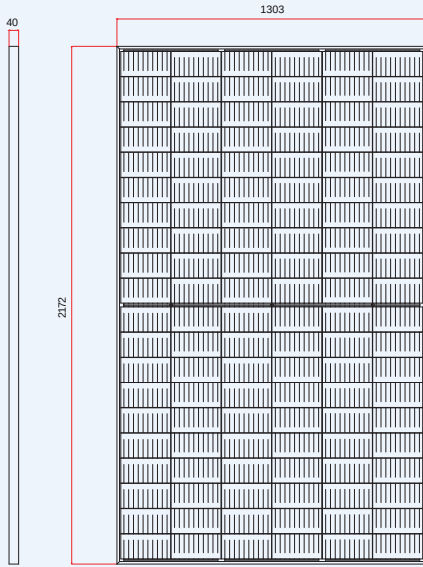DIMENSIONS OF PV MODULE(mm)


Front View

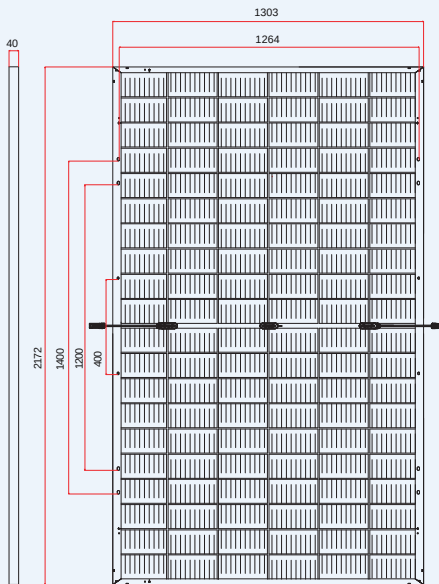

Back View

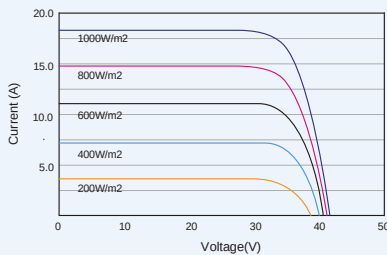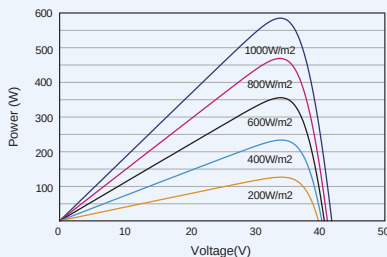I-V CURVES OF PV MODULE(590 W)

P-V CURVES OF PV MODULE(590W)

ELECTRICAL DATA (STC)

Peak Power Watts- P_{MAX} (Wp)*	580	585	590	595	600
Power Tolerance- P_{MAX} (W)	0 ~ +5				
Maximum Power Voltage- V_{MPP} (V)	33.8	34.0	34.2	34.4	34.6
Maximum Power Current- I_{MPP} (A)	17.16	17.21	17.25	17.30	17.34
Open Circuit Voltage- V_{OC} (V)	40.9	41.1	41.3	41.5	41.7
Short Circuit Current- I_{SC} (A)	18.21	18.26	18.31	18.36	18.42
Module Efficiency η_m (%)	20.5	20.7	20.8	21.0	21.2

 STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5.
 *Measuring tolerance: ±3%.

Electrical characteristics with different power bin (reference to 10% Irradiance ratio)

Total Equivalent power - P_{MAX} (Wp)	621	626	631	637	642
Maximum Power Voltage- V_{MPP} (V)	33.8	34.0	34.2	34.4	34.6
Maximum Power Current- I_{MPP} (A)	18.36	18.41	18.46	18.51	18.55
Open Circuit Voltage- V_{OC} (V)	40.9	41.1	41.3	41.5	41.7
Short Circuit Current- I_{SC} (A)	19.48	19.54	19.59	19.65	19.71
Irradiance ratio (rear/front)	10%				

Power Bifaciality: 70±5%.

ELECTRICAL DATA (NOCT)

Maximum Power- P_{MAX} (Wp)	439	443	447	451	454
Maximum Power Voltage- V_{MPP} (V)	31.5	31.7	31.9	32.0	32.2
Maximum Power Current- I_{MPP} (A)	13.93	13.97	14.01	14.06	14.10
Open Circuit Voltage- V_{OC} (V)	38.5	38.7	38.9	39.1	39.3
Short Circuit Current- I_{SC} (A)	14.68	14.72	14.76	14.80	14.84

 NOCT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

MECHANICAL DATA

Solar Cells	Monocrystalline
No. of cells	120 cells
Module Dimensions	2172×1303×40 mm (85.51×51.30×1.57 inches)
Weight	35.3 kg (77.8 lb)
Front Glass	2.0 mm (0.08 inches), High Transmission, AR Coated Heat Strengthened Glass
Encapsulant material	POE/EVA
Back Glass	2.0 mm (0.08 inches), Heat Strengthened Glass (White Grid Glass)
Frame	40mm(1.57 inches) Anodized Aluminium Alloy
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm ² (0.006 inches ²), Portrait: 280/280 mm(11.02/11.02 inches) Landscape: 2050/2050 mm(80.71/80.71 inches)
Connector	MC4 EVO2 / TS4*

*Please refer to regional datasheet for specified connector.

TEMPERATURE RATINGS

NOCT(Nominal Operating Cell Temperature)	43°C (±2°C)
Temperature Coefficient of P_{MAX}	- 0.34%/°C
Temperature Coefficient of V_{OC}	- 0.25%/°C
Temperature Coefficient of I_{SC}	0.04%/°C

(Do not connect Fuse in Combiner Box with two or more strings in parallel connection)

WARRANTY

12 year Product Workmanship Warranty
30 year Power Warranty
2% first year degradation
0.45% Annual Power Attenuation

(Please refer to product warranty for details)

MAXIMUM RATINGS

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC (IEC)
Max Series Fuse Rating	35 A

PACKAGING CONFIGURATION

Modules per 40' container:	448 pieces
----------------------------	------------